

10 9 8 7 6 5 4 3 2 1

F






E

D

C

B

A

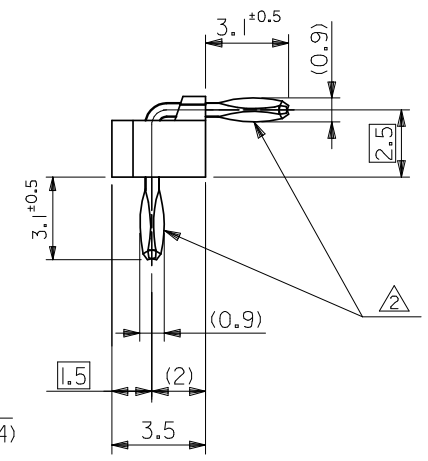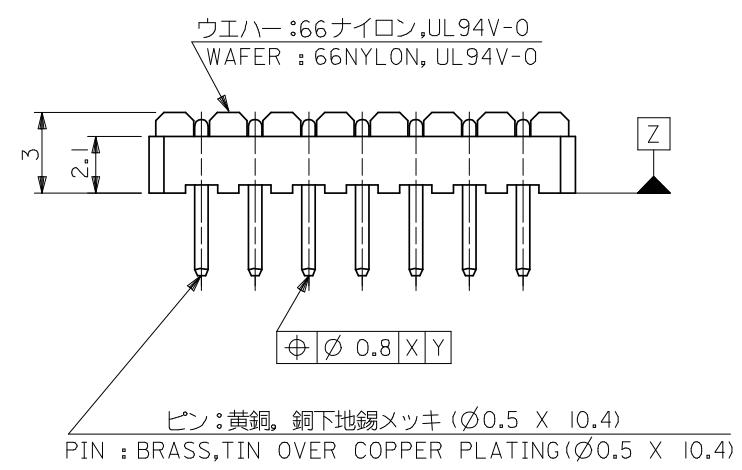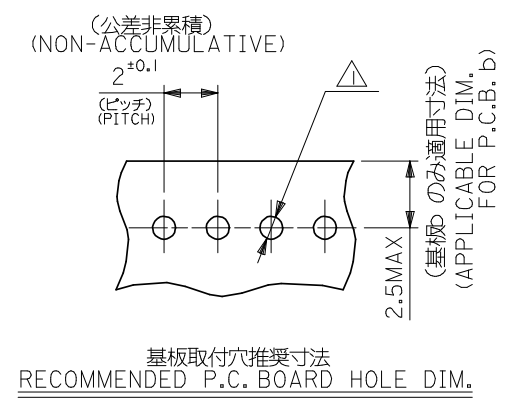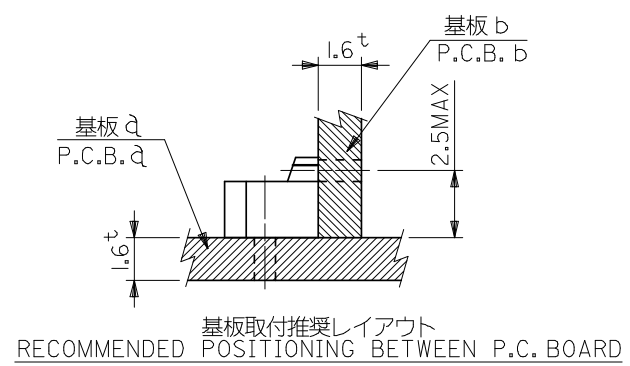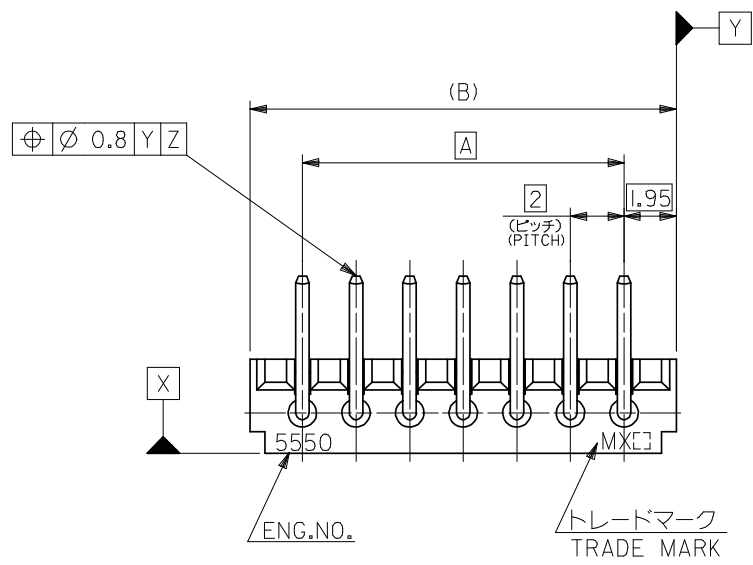

注記:
NOTES:

△ 3極 ~ 12極 : $\varnothing 0.8^{+0.05}$
3CKTS ~ 12CKTS : $\varnothing 0.8^{+0.05}$
13極 ~ 20極 : $\varnothing 0.85^{+0.05}$
13CKTS ~ 20CKTS : $\varnothing 0.85^{+0.05}$

△ キンクは 全ピン交互に設ける。
SET KINK ALTERNATELY TO ALL CIRCUITS.

35.9	32	39-27-0174	5550-17A	17
29.9	26	39-27-0144	5550-14A	14
19.9	10	39-27-0064	5550-06A	6
7.9	4	39-27-0034	5550-03A	3
(B)	A	EDP NO.	ENG.NO.	極数 CKT.

REVISED EC NO: J2008-3104 DRAWN: NAKAMURA CHKD: T. HARUYAMA APPR: NUKITA B	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
				MM ONLY		5:1	METRIC				
		10 UNDER	± 0.2	DRAWN BY	DATE	TITLE 2.0 B/B DIP					
		10 OVER 30 UNDER	± 0.25	S. MATSUZAKI	'95/9/6						
		30 OVER	± 0.3	CHECKED BY	DATE						
	ANGULAR ±3 °	Y. M	'95/9/6								
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY		DATE	 MOLEX INCORPORATED					
M. FUKUSHIMA			'95/9/6								
		MATERIAL NO.		DOCUMENT NO.					SHEET NO.		
		SEE TABLE		SD-5550-001					1 OF 1		
		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								