


CUSTOMER DRAWING

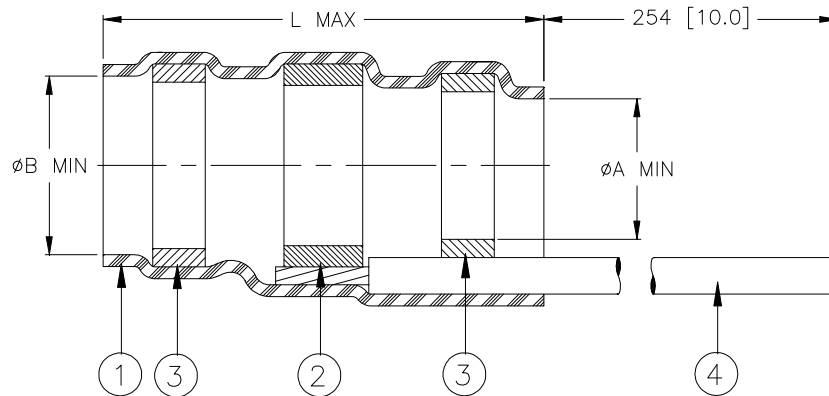

Product Name	Product Dimensions			Cable Dimensions				
	øA min	øB min	L max	øD max	øE min	øF min	øG max	J
CWT-7-W116-9	6.40 (0.252)	7.30 (0.287)	32.50 (1.280)	7.30 (0.287)	3.30 (0.130)	2.80 (0.110)	6.40 (0.252)	11.00±1.00 (0.433±0.040)
CWT-9-W116-9	8.70 (0.343)	9.20 (0.362)	35.50 (1.398)	9.20 (0.362)	4.50 (0.177)	4.00 (0.157)	8.70 (0.343)	12.00±1.00 (0.472±0.040)
CWT-11-W116-9	10.00 (0.394)	11.50 (0.453)	35.50 (1.398)	11.50 (0.453)	4.50 (0.177)	4.00 (0.157)	10.00 (0.394)	13.00±1.00 (0.512±0.040)
CWT-13-W116-9	13.00 (0.512)	15.10 (0.594)	45.50 (1.791)	15.10 (0.594)	7.00 (0.276)	6.50 (0.256)	13.00 (0.512)	17.00±1.00 (0.669±0.040)


MATERIALS

1. INSULATION SLEEVE: Transparent heat-shrinkable radiation cross-linked modified polyolefin.
2. SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Cd18 per ANSI/J-STD-006.
FLUX: TYPE ROM1 per ANSI/J-STD-004.
3. MELTABLE SEALING RING: Thermally stabilized thermoplastic.
4. GROUND LEAD: Raychem cross-linked polyethylene wire, AWG16, stranded tin-plated copper. Color: white.

APPLICATION

1. These controlled soldering devices are designed for termination of a bare or tin-plated copper shield on a cable having an insulation rated for at least +85°C, meeting the dimensional criteria listed in the table above.
2. Temperature range: -55°C to +125°C.
3. When installed properly, these devices will meet the requirements of Tyco Electronics/Raychem Specification RT-1404.
4. For installation procedure and application equipment, consult Tyco Electronics/Raychem RPIP 824-00.

For best results, prepare the cable as shown:

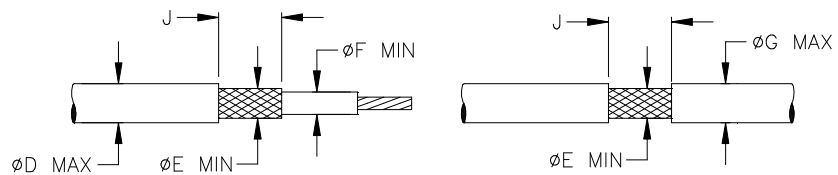

 TE Connectivity			TITLE: SOLDERSLEEVE TERMINATOR WITH PRE-INSTALLED LEAD		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices	DOCUMENT NO.: CWT-XX-W116-9		
TOLERANCES: 0.00 ± 0.02 MM 0.0 ± 0.2 MM 0 ± 0.5 MM	ANGLES: ± 0°30' ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	REV: C1	DATE: February 26, 2014	
PREPARED BY: TNGUYEN	CAGE CODE: 06090	ECO NUMBER: ECO-14-002835	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2014 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.