

SN54ALS878A, SN54ALS879A, SN54AS878, SN54AS879 SN74ALS878A, SN74ALS879A, SN74AS878, SN74AS879 DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

D2661, APRIL 1982 REVISED MAY 1986

- 3-State Bus Driving Outputs
- Full Parallel-Access for Loading
- Buffered Control Inputs
- Choice of True or Inverting Logic
'ALS878A, 'AS878 True Outputs
'ALS879A, 'AS879 Inverting Outputs
- Synchronous Clear
- Package Options Include Plastic "Small Outline" Packages, Both Plastic and Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs
- Dependable Texas Instruments Quality and Reliability


description

These dual 4-bit registers feature three-state outputs designed specifically for bus driving. This makes these devices particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.


The dual 4-bit edge-triggered flip-flops enter data on the low-to-high transition of the clock (1CLK and 2CLK). All types have individual synchronous clear inputs and output control pins for each group of 4-bit registers.

The SN54ALS' and SN54AS' devices are characterized for operation over the full military temperature range of -55°C to 125°C. The SN74ALS' and SN74AS' devices are characterized for operation from 0°C to 70°C.


SN54ALS878A, SN54AS878 . . . JT PACKAGE
SN74ALS878A, SN74AS878 . . . DW OR NT PACKAGE
(TOP VIEW)




SN54ALS878A, SN54AS878 . . . FK PACKAGE
SN74ALS878A, SN74AS878 . . . FN PACKAGE
(TOP VIEW)



SN54ALS879A, SN54AS879 . . . JT PACKAGE
SN74ALS879A, SN74AS879 . . . DW OR NT PACKAGE
(TOP VIEW)



SN54ALS879A, SN54AS879 . . . FK PACKAGE
SN74ALS879A, SN74AS879 . . . FN PACKAGE
(TOP VIEW)



NC - No internal connection

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1982, Texas Instruments Incorporated

2-755

**SN54ALS878A, SN54ALS879A, SN54AS878, SN54AS879
SN74ALS878A, SN74ALS879A, SN74AS878, SN74AS879
DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS**

FUNCTION TABLES

'ALS878A, 'AS878
(EACH FLIP-FLOP)

INPUTS				OUTPUT
OC	CLR	CLK	D	Q
L	L	↑	X	L
L	H	↑	H	H
L	H	↑	L	L
L	H	L	X	Q ₀
H	X	X	X	Z

'ALS879A, 'AS879
(EACH FLIP-FLOP)


INPUTS				OUTPUT
OC	CLR	CLK	D	Q
L	L	↑	X	H
L	H	↑	H	L
L	H	↑	L	H
L	H	L	X	Q ₀
H	X	X	X	Z

2


ALS and AS Circuits

logic symbols†

'ALS878A, 'AS878




'ALS879A, 'AS879




logic diagrams (positive logic)

'ALS878A, AS878 (EACH QUAD FLIP-FLOP)

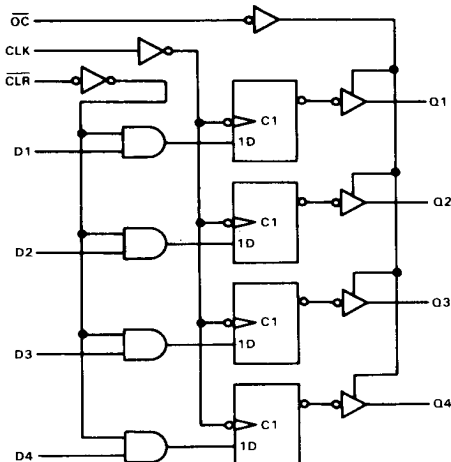

'ALS879A, 'AS879 (EACH QUAD FLIP-FLOP)

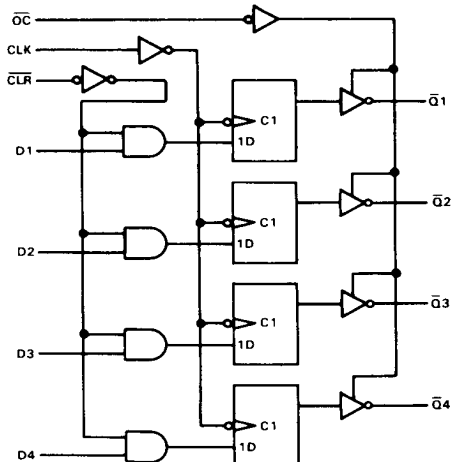

†These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, JT, and NT packages.

SN54ALS878A, SN54ALS879A, SN74ALS878A, SN74ALS879A DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range: SN54ALS878A, SN54ALS879A	-55°C to 125°C
SN74ALS878A, SN74ALS879A	0°C to 70°C
Storage temperature range	-65°C to 150°C

recommended operating conditions

			SN54ALS878A SN54ALS879A			SN74ALS878A SN74ALS879A			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage		2			2			V
V _{IL}	Low-level input voltage				0.7			0.8	V
I _{OH}	High-level output current				− 1			− 2.6	mA
I _{OL}	Low-level output current				12			24	mA
f _{clock}	Clock frequency	'ALS878A			25			30	MHz
		'ALS879A	0	20		0	25		
t _w	Pulse duration	'ALS878A CLK high or low	20			16.5			ns
		'ALS879A CLK high or low	25			20			
t _{su}	Setup time before CLK↑	Data	15			15			ns
		CLR	20			20			
t _h	Hold time after CLK↑	Data	4			4			ns
		CLR	0			0			
T _A	Operating free-air temperature		− 55		125	0		70	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54ALS878A SN54ALS879A			SN74ALS878A SN74ALS879A			UNIT
		MIN	TYP [†]	MAX	MIN	TYP [†]	MAX	
V_{IK}	$V_{CC} = 4.5$ V, $I_I = -18$ mA			-1.2			-1.2	V
V_{OH}	$V_{CC} = 4.5$ V to 5.5 V, $I_{OH} = -0.4$ mA	$V_{CC} - 2$			$V_{CC} - 2$			V
	$V_{CC} = 4.5$ V, $I_{OH} = -1$ mA	2.4	3.3					
	$V_{CC} = 4.5$ V, $I_{OH} = -2.6$ mA				2.4	3.2		
V_{OL}	$V_{CC} = 4.5$ V, $I_{OL} = 12$ mA		0.25	0.4		0.25	0.4	V
	$V_{CC} = 4.5$ V, $I_{OL} = 24$ mA					0.35	0.5	
I_{OZH}	$V_{CC} = 5.5$ V, $V_O = 2.7$ V			20			20	μA
I_{OZL}	$V_{CC} = 5.5$ V, $V_O = 0.4$ V			-20			-20	μA
I_I	$V_{CC} = 5.5$ V, $V_I = 7$ V			0.1			0.1	mA
I_{IH}	$V_{CC} = 5.5$ V, $V_I = 2.7$ V			20			20	μA
I_{IL}	$V_{CC} = 5.5$ V, $V_I = 0.4$ V			-0.2			-0.2	mA
$I_O^†$	$V_{CC} = 5.5$ V, $V_O = 2.25$ V	-30		-112	-30		-112	mA
I_{CC}	$V_{CC} = 5.5$ V	Outputs high		14	23	14		23
		Outputs low		18	31	18		31
		Outputs disabled		20	33	20		33

[†] All typical values are at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$.

[‡] The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS} .

TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2

ALS and AS Circuits

2-757

SN54ALS878A, SN54ALS879A, SN74ALS878A, SN74ALS879A
DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

switching characteristics (see Note 1)

PARAMETER	FROM	TO (OUTPUT)	V _{CC} = 5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = 25 °C			V _{CC} = 4.5 V to 5.5 V, C _L = 50 pF, R1 = 500 Ω, R2 = 500 Ω, T _A = MIN to MAX			UNIT	
			'ALS878A 'ALS879A			SN54ALS878A SN54ALS879A		SN74ALS878A SN74ALS879A		
			MIN	TYP	MAX	MIN	MAX	MIN		MAX
f _{max}	'ALS878A		40	50		25		30	MHz	
	'ALS879A		40	50		20		25		
t _{PLH}	CLK	Q or $\overline{Q}$		8	10	4	15	4	14	ns
t _{PHL}				9	13	4	17	4	16	
t _{PZH}	$\overline{OC}$	Q or $\overline{Q}$		9	13	4	22	4	20	ns
t _{PZL}				11	15	4	22	4	20	
t _{PHZ}	$\overline{OC}$	Q or $\overline{Q}$		6	8	2	12	2	10	ns
t _{PLZ}				7	10	3	18	3	15	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.

2
ALS and AS Circuits

SN54AS878, SN54AS879, SN74AS878, SN74AS879 **DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS**

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC}	7 V
Input voltage	7 V
Voltage applied to a disabled 3-state output	5.5 V
Operating free-air temperature range	SN54AS878, SN54AS879 -55°C to 125°C
	SN74AS878, SN74AS879 0°C to 70°C
Storage temperature range	-65°C to 150°C

recommended operating conditions

			SN54AS878 SN54AS879			SN74AS878 SN74AS879			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage		2			2			V
V _{IL}	Low-level input voltage		0.8			0.8			V
I _{OH}	High-level output current		− 12			− 15			mA
I _{OL}	Low-level output current		32			48			mA
f _{clock}	Clock frequency		0 100			0 125			MHz
t _w	Pulse duration	CLK low	4			2			ns
		CLK high	5			4			
t _{su}	Setup time before CLK↑	Data	3			2			ns
		CLR	6.5			5.5			
t _h	Hold time after CLK↑	Data	3			2			ns
		CLR	0			0			
T _A	Operating free-air temperature		− 55 125			0 70			°C

2

ALS and AS Circuits

SN54AS878, SN54AS879, SN74AS878, SN74AS879
DUAL 4-BIT D-TYPE EDGE-TRIGGERED FLIP-FLOPS WITH 3-STATE OUTPUTS

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		SN54AS878 SN54AS879		SN74AS878 SN74AS879		UNIT	
				MIN	TYP†	MAX	MIN		TYP†
V _{IK}		V _{CC} = 4.5 V,	I _I = -18 mA			-1.2		-1.2	V
V _{OH}		V _{CC} = 4.5 V to 5.5 V, I _{OH} = -2 mA		V _{CC} - 2		V _{CC} - 2			V
		V _{CC} = 4.5 V,	I _{OH} = -12 mA	2.4	3.2				
		V _{CC} = 4.5 V,	I _{OH} = -15 mA				2.4	3.3	
V _{OL}		V _{CC} = 4.5 V,	I _{OL} = 32 mA		0.29	0.5			V
		V _{CC} = 4.5 V	I _{OL} = 48 mA					0.33	
I _{OZH}		V _{CC} = 5.5 V,	V _O = 2.7 V			50		50	μA
I _{OZL}		V _{CC} = 5.5 V,	V _O = 0.4 V			-50		-50	μA
I _I		V _{CC} = 5.5 V,	V _I = 7 V			0.1		0.1	mA
I _{IH}		V _{CC} = 5.5 V,	V _I = 2.7 V			20		20	μA
I _{IL}	D	V _{CC} = 5.5 V,	V _I = 0.4 V			-3		-2	mA
	All other					-0.5		-0.5	
I _O [‡]		V _{CC} = 5.5 V,	V _O = 2.25 V	-30	-112	-30	-112	mA	
I _{CC}	'AS878	V _{CC} = 5.5 V, See Note 1	Outputs high	82	132	82	132	mA	
			Outputs low	96	155	96	155		
			Outputs disabled	100	160	100	160		
	'AS879		Outputs high	88	142	88	142		
			Outputs low	94	150	94	150		
			Outputs disabled	100	160	100	160		

†All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

‡The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS} .

NOTE 1: I_{CC} is measured with $\overline{\text{CLR}}$ and all D inputs grounded, and CLK and $\overline{\text{OC}}$ at 4.5 V.

switching characteristics (see Note 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	VCC = 4.5 V to 5.5 V, CL = 50 pF, R1 = 500 Ω, R2 = 500 Ω, TA = MIN to MAX				UNIT
			SN54AS878 SN54AS879		SN74AS878 SN74AS879		
			MIN	MAX	MIN	MAX	
fmax			100		125		MHz
tPLH	CLK	Q or Q̄	3	11.5	3	8.5	ns
tPHL			4	12.5	4	10.5	
tPZH	OC	Q or Q̄	2	8	2	7	ns
tPZL			3	11.5	3	10.5	
tPHZ	OC	Q or Q̄	2	7	2	6	ns
tPLZ			2	7	2	6	

NOTE 1: Load circuit and voltage waveforms are shown in Section 1.