


Si PIN photodiode

S3590-18/-19

Large area Si PIN photodiode for scintillation counting

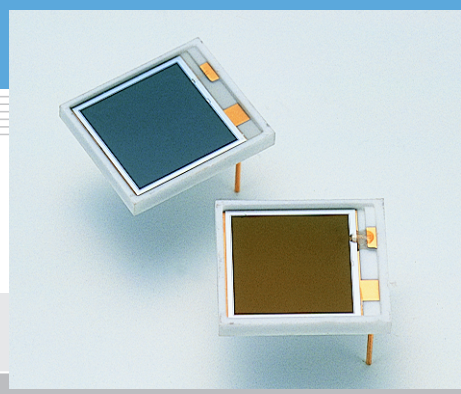

Features

- Suitable for coupling with blue scintillator (LSO, GSO, etc.)
- Internal quantum efficiency: 100 % ($\lambda=420$ nm)
- S3590-19: bare chip type (without window)

Applications

- Radiation detection (PET, etc.)
- X-ray detection


■ Absolute maximum ratings

Parameter	Symbol	Value	Unit
Reverse voltage	V_R	100	V
Power dissipation	P	100	mW
Operating temperature	T_{opr}	-20 to +60	°C
Storage temperature	T_{stg}	-20 to +80	°C


■ Electrical and optical characteristics ($T_a=25$ °C)

Parameter	Symbol	Condition	S3590-18			S3590-19			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Spectral response range	λ		-	320 to 1100	-	-	320 to 1100	-	nm
Peak sensitivity wavelength	λ_p		-	960	-	-	960	-	nm
Photo sensitivity	S	$\lambda=\lambda_p$	-	0.65	-	-	0.58	-	A/W
		$\lambda=420$ nm (LSO)	-	0.28	-	-	0.33	-	A/W
		$\lambda=480$ nm (BGO)	-	0.34	-	-	0.37	-	A/W
		$\lambda=540$ nm (CsI)	-	0.38	-	-	0.4	-	A/W
Short circuit current	I_{sc}	100 lx	-	100	-	-	86	-	μ A
Dark current	I_D	$V_R=70$ V	-	4	10	-	4	10	nA
Temperature coefficient of I_D	T_{CID}		-	1.12	-	-	1.12	-	times/°C
Cut-off frequency	f_c	$V_R=70$ V, -3 dB $R_L=50$ Ω	-	40	-	-	40	-	MHz
Terminal capacitance	C_t	$V_R=70$ V, $f=1$ MHz	-	40	-	-	40	-	pF
Noise equivalent power	NEP		-	7.6×10^{-14}	-	-	7.6×10^{-14}	-	W/Hz ^{1/2}

■ Spectral response

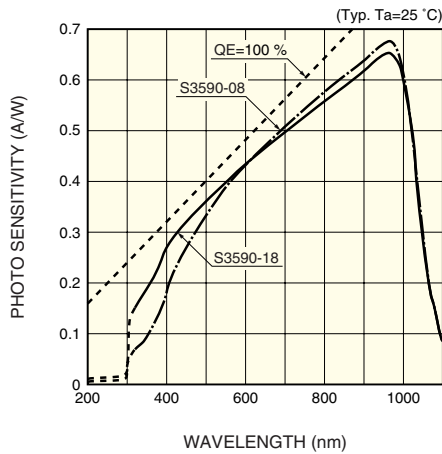
S3590-18

KPINB0223EA

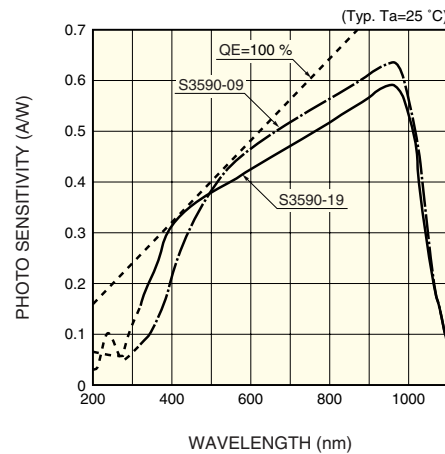S3590-19 (Bare chip type)


KPINB0224EA

■ Dark current vs. reverse voltage

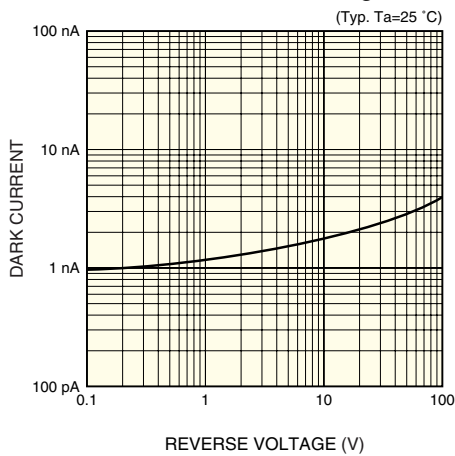


KPINB0225EA

■ Terminal capacitance vs. reverse voltage

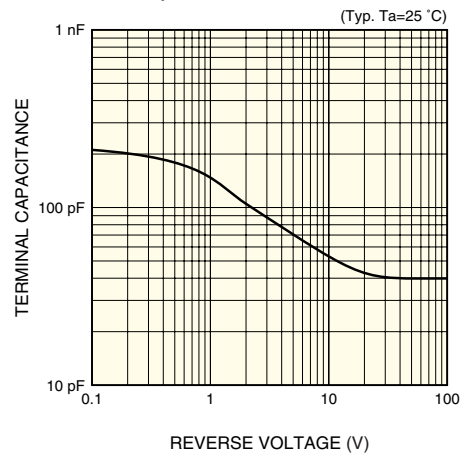

KPINB0226EA

■ Dimensional outline (unit: mm)

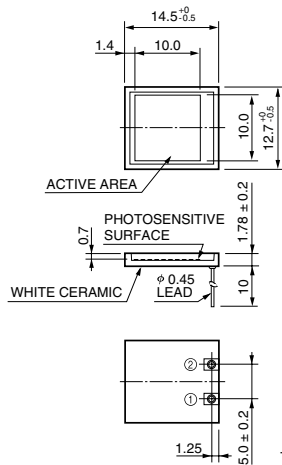

The coating resin may extend a maximum of 0.1 mm beyond the upper surface of the package.

KPINA0014ED

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KPIN1039E01
Mar. 2001 DN