



Thick Film Chip Resistors



CR, CJ Series

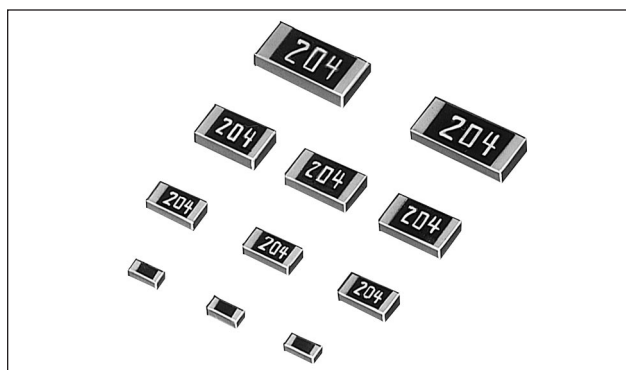

STRUCTURE AND MATERIAL

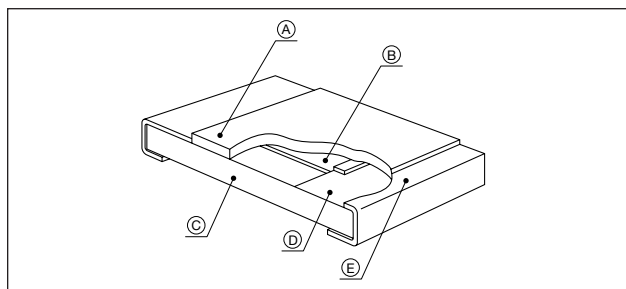

Code	Structure	Material
A	Coating	Glass or Epoxy
B	Resistor	RuO ₂ Resistor (The same material of Termination for chip jumper)
C	Substrate	96% Alumina
D	Termination	Silver
E	Plating	(Ni, Sn-Pb) Plating

FEATURES

- Low Noise
- Nickel Barrier Terminations

APPLICATION

- General Purpose

HOW TO ORDER

CR 05 - 472 J - H

Packaging

T = 7" Reel/Punched Paper Tape
(5,000 pcs/reel) except CR05
H = 7" Reel/Punched Paper Tape
(10,000 pcs/reel, 2mm pitch taping)
CR05 and CR10
D = 10" Reel/Punched Paper Tape
(10,000 pcs/reel) CR32, CR21, CR10
K = 13" Reel/Punched Paper Tape
(20,000 pcs/reel) except CR05
(optional)

Resistance Tolerance

D = ±0.5% J = ±5%
F = ±1% Blank = Jumper Chips

Resistance Value (3 digits or 4 digits)

Example: 562 = $56 \times 10^2 = 5600\Omega$
4021 = $402 \times 10^1 = 4020\Omega$
Chip Jumper = 000


Size (EIA)

05 = 0402 21 = 0805
10 = 0603 32 = 1206

Series

CR = Resistor CJ = Jumper

DIMENSIONS

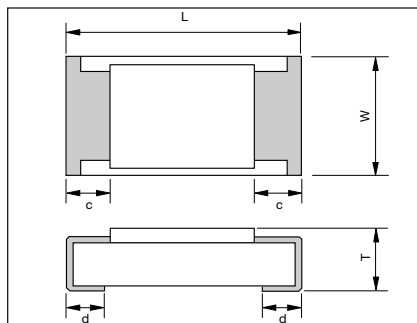

millimeters (inches)

	CR05, CJ05 (0402)	CR10, CJ10 (0603)	CR21, CJ21 (0805)	CR32, CJ32 (1206)
W	0.50±0.05 (0.020±0.002)	0.80 ^{+0.18} _{-0.004} (0.031 ^{+0.006} _{-0.004})	1.25 ^{+0.18} _{-0.004} (0.050 ^{+0.006} _{-0.004})	1.55 ^{+0.18} _{-0.004} (0.061 ^{+0.006} _{-0.004})
L	1.00±0.05 (0.039±0.002)	1.60±0.10 (0.063±0.004)	2.00±0.10 (0.080±0.004)	3.10±0.10 (0.122±0.004)
C	0.20±0.15 (0.008±0.006)	0.25±0.20 (0.010±0.008)	0.35±0.20 (0.014±0.008)	0.45±0.20 (0.018±0.008)
d	0.20±0.10 (0.008±0.004)	0.20 ^{+0.20} _{-0.008} (0.008 ^{+0.008} _{-0.008})	0.40±0.20 (0.016±0.008)	0.45±0.20 (0.018±0.008)
T	0.35±0.05 (0.014±0.002)	0.50±0.10 (0.020±0.004)	0.55±0.10 (0.022±0.004)	0.55 ^{+0.10} _{-0.004} (0.022 ^{+0.004} _{-0.002})

SPECIFICATIONS

Series	CR05 (0402)	CR10 (0603)	CR21 (0805)	CR32 (1206)
Rated Power	0.0625 (1/16) W	0.10 (1/10) W	0.125 (1/8) W	0.25 (1/4) W
Max. Working Voltage	50V	50V	100V	200V
Resistance Tolerance	F = ±1% J = ±5%	D = ±0.5% F = ±1% J = ±5%	D = ±0.5% F = ±1% J = ±5%	D = ±0.5% F = ±1% J = ±5%
Resistance Value Range	10Ω to 1MΩ : F 1.0Ω to 10MΩ : J	10Ω to 1MΩ : D 10Ω to 1MΩ : F 1.0Ω to 10MΩ : J	10Ω to 1MΩ : D 10Ω to 1MΩ : F 1.0Ω to 10MΩ : J	10Ω to 1MΩ : D 10Ω to 1MΩ : F 1.0Ω to 10MΩ : J
Working Temperature	-55 to +125°C	-55 to +125°C	-55 to +125°C	-55 to +125°C

Thick Film Chip Resistors



CR, CJ Series

SPECIFICATIONS

CJ Series

Part Number	CJ05, CJ10, CJ21 (0402, 0603, 0805 Type)	CJ32 (1206 Type)
Rated Current	1A (70°C)	2A (70°C)
Resistivity	50mΩ max.	50mΩ max.
Working Temperature	-55 to +125°C	-55 to +125°C

HOW TO CALCULATE RATED VOLTAGE

$$E = \sqrt{P \cdot R}$$


E = Rated Voltage (V)

P = Rated Power (W)

R = Standard Resistance Value (Ω)

Rated voltage should be lower than max. working voltage.

RECOMMENDED LAND PATTERN

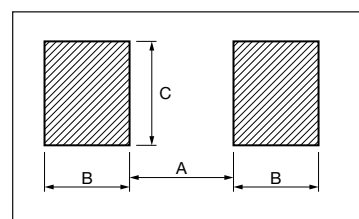

EIA Size	0402	0603	0805	1206
A	0.50 (0.020)	0.80 (0.031)	1.00 (0.039)	2.00 (0.079)
B	0.40 (0.016)	0.70 (0.028)	0.80 (0.031)	0.80 (0.031)
C	0.50 (0.020)	0.80 (0.031)	1.20 (0.047)	1.50 (0.059)

MARKING

Marking available as follows:

Series: CR32, CJ32, CR21, CJ21, CR10, CJ10

3 digit indication


Example: 473=47x10³ = 47000 Ω = 47 kΩ

0 = 0 Ω (Jumper)

100 = 10 Ω

102 = 1 kΩ

105 = 1 MΩ



Series: CR05 and CJ05 - No marking

Note: On CR32 4 digit marking is standard for ±1% and ±0.5% tolerances.

STANDARD RESISTANCE VALUE

E24	1.0	1.1	1.2	1.3	1.5	1.6	1.8	2.0	2.2
	2.4	2.7	3.0	3.3	3.6	3.9	4.3	4.7	5.1
	5.6	6.2	6.8	7.5	8.2	9.1			


For ±1% and ±.5% Tolerance

E96	10.0	10.2	10.5	10.7	11.0	11.3	11.5	11.8	12.1	12.4
	12.7	13.0	13.3	13.7	14.0	14.3	14.7	15.0	15.4	15.8
	16.2	16.5	16.9	17.4	17.8	18.2	18.7	19.1	19.6	20.0
	20.5	21.0	21.5	22.1	22.6	23.2	23.7	24.3	24.9	25.5
	26.1	26.7	27.4	28.0	28.7	29.4	30.1	30.9	31.6	32.4
	33.2	34.0	34.8	35.7	36.5	37.4	38.3	39.2	40.2	41.2
	42.2	43.2	44.2	45.3	46.4	47.5	48.7	49.9	51.1	52.3
	53.6	54.9	56.2	57.6	59.0	60.4	61.9	63.4	64.9	66.5
	68.1	69.8	71.5	73.2	75.0	76.8	78.7	80.6	82.5	84.5
	86.6	88.7	90.9	93.1	95.3	97.6				

DERATING CURVE

Rated power should be reduced as below when temperature become higher.

Under high temperature, power derated as follows:

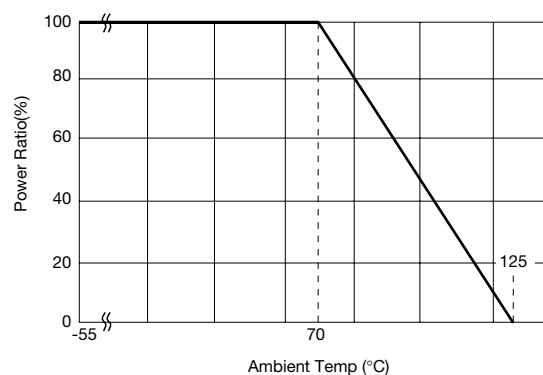


Chip Resistor Arrays



CR, CJ, CRA, CRB, CRC Series - Test Conditions

ELECTRICAL CHARACTERISTICS

Item		Standard		Test Conditions							
		Resistor	Jumper	Resistor	Jumper						
DC Resistance		Within Initial Tolerance		Power Condition A (20°C, 65% RH)							
Temperature Characteristics		<table><tr><th>Resistance (Ω)</th><th>TCR (ppm/°C)</th></tr><tr><td>D, F 10≤ R ≤1M</td><td>-100 to +100</td></tr><tr><td>J R <10 10≤ R ≤1M 1M< R</td><td>-100 to +600 -200 to +200 -500 to +300</td></tr></table>	Resistance (Ω)	TCR (ppm/°C)	D, F 10≤ R ≤1M	-100 to +100	J R <10 10≤ R ≤1M 1M< R	-100 to +600 -200 to +200 -500 to +300		Test Temperature: 25, 125(°C) ΔR/R=R₂-R₁/R₁×1/T₂-T₁×10⁶ ΔR/R = Temp. Coefficient (ppm/°C) T₁ = 25(°C) T₂ = 125(°C) R₁ = T₁ Resistance at (Ω) R₂ = T₂ Resistance at (Ω)	
Resistance (Ω)	TCR (ppm/°C)										
D, F 10≤ R ≤1M	-100 to +100										
J R <10 10≤ R ≤1M 1M< R	-100 to +600 -200 to +200 -500 to +300										
Short-time Overload	ΔR/R	±(2.0%+0.10Ω) max. of the initial value	50mΩ max.	(1) Apply 2.0 x rated voltage for 5 sec. (2.5 x rated voltage for Arrays) (2) Wait 30 minutes (3) Measure resistance CR05 = 50V max. CR10 = 100V max. CR21 = 200V max. CR32 = 400V max. CRA, CRB, CRC = 100V max.	(1) 2A for 5 sec. (2) Wait 30 minutes (3) Measure resistance						
	Visual	No evidence of mechanical damage intermittent overload									
Intermittent Overload	ΔR/R	±(5%+0.1Ω) max. of the initial value	50mΩ max.	(1) Perform 10,000 voltage cycles as follows: ON (2.0 x rated voltage, 2.5 x for Arrays) 1 sec. OFF 25 sec. (2) Stabilization time 30 min. without loading (3) Measure resistance CR05 = 50V max. CR10 = 150V max. CR21 = 200V max. CR32 = 400V max. CRA, CRB, CRC = 100V max.	(1) Perform 10,000 current cycles as follows: ON (2A) 1 sec. OFF 25 sec. (2) Wait 30 minutes (3) Measure resistance						
	Visual	No evidence of mechanical damage									
Dielectric Withstanding Voltage		No evidence of mechanical damage		Apply 500 VAC for 1 min. (CR10 300 VAC) (CR05, CRA, CRB, CRC 300 VAC/1 sec.)							
Insulation Resistance		• CR05, CJ05 = 10⁸Ω min. • CR10, CJ10 = 10⁹Ω min. • CR21, CJ21 = 10¹⁰Ω min. • CR32, CJ32 = 10¹²Ω min. • CRA, CRB, CRC = 10⁹Ω min.		 Apply 500V DC (CR05, CRA, CRB, CRC 100V DC)							

MECHANICAL CHARACTERISTICS

Technical drawing of a mechanical part showing bending and straightening processes. The drawing includes dimensions in millimeters and inches.

Bending in 10 seconds: The part is bent around a radius of $R230$ (0.787 inches). The dimensions shown are 20 (0.787) and 50 (1.969) for the top section, and 3 (0.118) for the bottom section. The part is supported by a base with a central hole.

Dimensions:

- Top section: 20 (0.787) and 50 (1.969)
- Bottom section: 3 (0.118)
- Radius: $R230$ (0.787)
- Base hole diameter: $\varnothing 5$ (0.197)
- Base width: 45 (1.772) on each side of the hole
- Maximum straightening distance: ± 2 (0.079) max

millimeters (inches)

Item		Standard		Test Conditions	
		Resistor	Jumper	Resistor	Jumper
Temperature Cycle	$\Delta R/R$	$\pm(1\%+0.05\Omega)$ max. of the initial value	50m Ω max.	(1) Run 5 cycles as follows: -55 $\pm$ 3°C for 30 min. 125 $\pm$ 3°C for 30 min. Room temp. for 10-15 min. (2) Stabilize component at room temperature for 1 hr. then measure value.	
	Visual	No evidence of mechanical damage			
Low Temperature Storage	$\Delta R/R$	$\pm(2\%+0.1\Omega)$ max. of the initial value	50m Ω max.	(1) Dwell in -55°C chamber without loading for 1000 ⁺⁴⁸ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value.	
	Visual	No evidence of mechanical damage			
High Temperature Storage	$\Delta R/R$	$\pm(3\%+0.1\Omega)$ max. of the initial value	50m Ω max.	(1) Dwell in 125°C chamber without loading for 1000 ⁺⁴⁸ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value.	
	Visual	No evidence of mechanical damage			
Moisture Resistance	$\Delta R/R$	$\pm(3\%+0.1\Omega)$ max. of the initial value	50m Ω max.	(1) Dwell in temp.: 65°C RH90 to 95% RH chamber without loading for 1000 ⁺⁴⁸ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value.	
	Visual	No evidence of mechanical damage			
Life Test	$\Delta R/R$	$\pm(3\%+0.1\Omega)$ max. of the initial value	50m Ω max.	(1) Temp.: 70 $\pm$ 3°C Voltage: (rated voltage) on 90 min. off 30 min. Duration: 1000 ⁺⁴⁸ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value.	
	Visual	No evidence of mechanical damage			
Loading Life in Moisture	$\Delta R/R$	$\pm(3\%+0.1\Omega)$ max. of the initial value	50m Ω max.	(1) Temp.: 40 $\pm$ 2°C RH: 90-95% Voltage Cycle: on 90 min. (rated voltage) off 30 min. Duration: 1000 ⁺⁴⁸ hrs. (2) Stabilize component at room temperature for 1 hr. then measure value.	
	Visual	No evidence of mechanical damage			