

L6 Series — Miniature Switches and Pilot Devices

Key features of the 5/8" L6 Series include:

- 5/8" (16mm) mounting holes
- Locking lever removable contact blocks
- Solder terminal or PCB terminal options
- Available assembled or as sub-components
- Worldwide approvals
- Incandescent or LED illumination
- Snap action contacts




UL Recognized
File No. E55996



CSA Certified
File No. LR21451



Registration No. R9551089 (E-stops)
Registration No. J9551458 (all other switches)
Registration No. J9650511 (Pilot Lights)

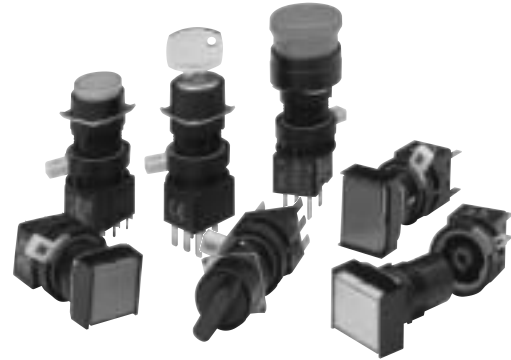

A2

Switches & Pilot Devices

Contact Ratings	Conforming to Standards	EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 N0.14					
	Operating Temperature	Operation: -25 to +55°C (without freezing), 45 to 85% rh Storage: -30 to +80°C (without freezing)					
	Vibration Resistance	5 to 55Hz, 1.0 peak-peak amplitude max					
	Shock Resistance	Operating limit: 100 m/sec ² (approximately 10G) Damage limit: 1000 m/sec ² (approximately 100G)					
	Mechanical Life	Momentary pushbuttons 2,000,000 operations minimum All others: 250,000 operations minimum					
	Degree of Protection	IP65 (conforming to IEC 60529)					
	Dielectric Strength	Switch unit: between live and ground: 2500 volt AC, 1 minute between terminals of different poles: 2500 volt AC, 1 minute between terminals of same pole: 1000 volt AC, 1 minute Illumination unit: between live part and ground: 2500 volt AC, 1 minute					
	Insulation Resistance	100 MΩ minimum (using 500V DC megger)					
	Rated Insulation Voltage	250 V AC/DC					
	Rated Thermal Current	Gold Contacts (pcb): 3A Silver Contacts (solder): 5A					
Rated Operating Current	Contact Resistance	50 Ω maximum initial value					
		Silver Contacts (Solder Terminals)			Gold Clad Contacts (PCB terminals)		
		30V	125V	250V	30V	125V	
		AC resistive	-	3A	2A	-	
Minimum Recommended Load (reference value for silver contacts)	AC inductive	-	2A	1.5A	AC inductive	-	
	DC resistive	2A	0.4A	-	DC resistive	0.1A	-
	DC inductive	1A	0.2A	-			
Lamp Ratings	Lamp Current Draw	5V DC LED: 8mA 6V LED: 7mA 12V LED: 8mA 24V LED: 8mA 6V incandescent: 100 mA 12V incandescent: 50 mA 24V incandescent: 25 mA					
	Lamp Life	Incandescent: 2000 hours./LED: 50,000 hours. (on pure DC, half-life intensity)					
Buzzer Ratings	Frequency	2 khz ± 500 HZ					
	Amplitude	80db @ 0.1m (at rated voltage)					
	Operating Voltage	6V AC/DC or 12 - 24V AC/DC ± 10%					
	Adjustable Cycle	55 to 600 cycles per minute					
	Current Draw	DC: 7mA AC: 20mA					
	Life	1000 hrs. minimum					
	Insulation Voltage	60V AC/DC					
Operating Temperature	Operating Temperature	-20 to 55 C (no freezing), 45 to 85% rh					

Non-Illuminated Pushbuttons (Assembled)

Part Numbers: Non-Illuminated Pushbuttons

Style	Operation	Contact	Terminal Style	
			Solder Tab	PCB
Round 	Momentary	SPDT DPDT	LA1B-M1C5-① LA1B-M1C6-①	LA1B-M1C1V-① LA1B-M1C2V-①
	Maintained	SPDT DPDT	LA1B-A1C5-① LA1B-A1C6-①	LA1B-A1C1V-① LA1B-A1C2V-①
Square 	Momentary	SPDT DPDT	LA2B-M1C5-① LA2B-M1C6-①	LA2B-M1C1V-① LA2B-M1C2V-①
	Maintained	SPDT DPDT	LA2B-A1C5-① LA2B-A1C6-①	LA2B-A1C1V-① LA2B-A1C2V-①
Rectangular 	Momentary	SPDT DPDT	LA3B-M1C5-① LA3B-M1C6-①	LA3B-M1C1V-① LA3B-M1C2V-①
	Maintained	SPDT DPDT	LA3B-A1C5-① LA3B-A1C6-①	LA3B-A1C1V-① LA3B-A1C2V-①
Oversize Round Flush 	Momentary	SPDT DPDT	HA1B-M1C5-① HA1B-M1C6-①	HA1B-M1C1V-① HA1B-M1C2V-①
	Maintained	SPDT DPDT	HA1B-A1C5-① HA1B-A1C6-①	HA1B-A1C1V-① HA1B-A1C2V-①
Oversize Round Extended 	Momentary	SPDT DPDT	HA1B-M2C5-① HA1B-M2C6-①	HA1B-M2C1V-① HA1B-M2C2V-①
	Maintained	SPDT DPDT	HA1B-A2C5-① HA1B-A2C6-①	HA1B-A2C1V-① HA1B-A2C2V-①
Oversize Square Flush 	Momentary	SPDT DPDT	HA2B-M1C5-① HA2B-M1C6-①	HA2B-M1C1V-① HA2B-M1C2V-①
	Maintained	SPDT DPDT	HA2B-A1C5-① HA2B-A1C6-①	HA2B-A1C1V-① HA2B-A1C2V-①
Oversize Square Extended 	Momentary	SPDT DPDT	HA2B-M2C5-① HA2B-M2C6-①	HA2B-M2C1V-① HA2B-M2C2V-①
	Maintained	SPDT DPDT	HA2B-A2C5-① HA2B-A2C6-①	HA2B-A2C1V-① HA2B-A2C2V-①
Mushroom 	Momentary	SPDT DPDT	HA1B-M3C5-① HA1B-M3C6-①	HA1B-M3C1V-① HA1B-M3C2V-①
	Maintained	SPDT DPDT	HA1B-A3C5-① HA1B-A3C6-①	HA1B-A3C1V-① HA1B-A3C2V-①

Button Color Codes

Color	Code
Black	B
Green	G
Red	R
Blue	S
White	W
Yellow	Y

A2

Switches & Pilot Devices



1. In place of ① specify Button Color Code from table on right.
2. Illuminated (translucent) style lenses also available, specify as such: instead of LA1B-M1C5-① use LA1B-M1C5L-② in place of ② specify Lens Color Code from next page.)
3. PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie LA1B-M1C1V-① becomes LA1B-M1C5V-①).

Non-Illuminated Pushbuttons (Sub-Assembled)

Contact + Safety Lever Lock + Operator + Button = Complete Part



Part Numbers: Operators

Style	Momentary	Maintained
Round	LA1L-M0	LA1L-A0
Square	LA2L-M0	LA2L-A0
Rectangular	LA3L-M0	LA3L-A0
Oversize Round	HA1B-M0	HA1B-A0
Oversize Square	HA2B-M0	HA2B-A0
Mushroom	HA1B-M0L	HA1B-A0L

Part Numbers: Buttons/Lenses

Style	Button	Lens
Round	AB6M-BK2-①	AL6M-LK2-②
Square	AB6Q-BK2-①	AL6Q-LK2-②
Rectangular	AB6H-BK2-①	AL6H-LK2-②
Oversize Round Flush	HA1A-B1-①	HA1A-L1-②*
Oversize Round Extended	HA1A-B2-①	—
Oversize Square Flush	HA2A-B1-①	HA2A-L1-②**
Oversize Square Extended	HA2A-B2-①	—
Mushroom	HA1A-B3-①	HA1A-L3-②

Part Numbers: Contacts

Appearance		Contacts	Terminal Style	
			Solder Tab	PCB
	Gold	SPDT DPDT	HA-C1 HA-C2	HA-C1V HA-C2V
	Silver	SPDT DPDT	HA-C5 HA-C6	HA-C5V HA-C6V

Part Number: Safety Lever Lock

Appearance	Part Number
	HA9Z-LS

① Button Color Code

Color	Code
Black	B
Green	G
Red	R
Blue	S
White	W
Yellow	Y

② Lens Color Code

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W



1. In place of ① specify Button Color Code from table on right.
2. In place of ② specify Lens Color Code from table on right.
3. *requires HA1L-M0 or HA1L-A0 operator instead of HA1B-M0 or HA1B-A0.
4. **requires HA2L-M0 or HA2L-A0 instead of HA2B-M0 or HA2B-A0.

HA1B/HA1E E-Stop

Miniature Switches and Pilot Devices: 5/8" (16mm)

Key features of HA1B/HA1E Push lock Turn Reset include:


- PCB or Solder Terminals
- Quick Release Contact Blocks
- Positive Action Contacts
- 1 or 2 form B (SPST-NC) Contacts
- IP65 Protection
- 16mm Mounting Hole
- Tamper Proof Construction


A2

Switches & Pilot Devices

Specifications	Contact Ratings		24VDC/2A
			120VAC/3A
	Contact Form		1 or 2 form B (2-SPST-NC)
	Termination		PCB or Solder Terminal
	Contact Material		Silver
	Applicable Standards		EN60947-5-1, UL-508, CSA 22.2. No. 14
	Rated Insulation Voltage		250V
	Degree of Protection		IP65, when mounted in an enclosure
	Conditional Short-Circuit Current & Short-Circuit Protective Device		50 A (at 250V) 10A 250V Fuse, operation class aM according to IEC269-1 and IEC269-2
	Positive Opening Operation	Positive opening travel	3.4mm
Minimum force required to achieve positive opening operation of all break contacts.		10.3 N (2 form B contacts)	
Maximum travel including travel beyond the minimum travel position		5.5mm	
Maximum frequency of actuation		1,200 operations/hour	
Pollution Degree		3	

Part Numbers: Nameplates

HAAV-Yellow Plastic


	Part Number
Blank	HAAV-0
Engraved Emergency Stop	HAAV-27

Part Numbers: Positive Action E-Stop

Appearance	Operation	Contact	Terminal Style	
			Solder Tab	PCB
E-Stop		DPST(NC) (2 form B)	HA1B-V2E2R	HA1B-V2E2VR
		Short Body SPST-NC (1 form B) DPST-NC (2 form B)	HA1E-V2S1R HA1E-V2S2R	—

 Button is non-removable, available in red and as complete assembled unit only.

Part Number: Buzzers (IP40)

Appearance	Operating Voltage	Terminal Style	
		Solder/Tab	PCB
Buzzer-Rectangular	6V AC/DC ± 10%	LA3Z-1X2	LA3Z-1X2V
	12V to 24 AC/DC ± 10%	LA3Z-1X4	LA3Z-1X4V

Frequency: 2kHz ± 500 Hz
Amplitude: 80db at 0.1m
Beeping: Adjustable from steady tone to 600 beeps per minute.

Pilot Lights (Assembled)

Part Numbers: Pilot Lights (LED)

Style	Voltage	Terminal Style	
		Solder Tab	PCB
Round	24V AC/DC LED 24VAC/DC Incandescent	LA1P-1C04-② LA1P-1C07-②	LA1P-1C04V-② LA1P-1C07V-②
Square	24V AC/DC LED 24V AC/DC Incandescent	LA2P-1C04-② LA2P-1C07-②	LA2P-1C04V-② LA2P-1C07V-②
Rectangle	24V AC/DC LED 24V AC/DC Incandescent	LA3P-1C04-② LA3P-1C07-②	LA3P-1C04V-② LA3P-1C07V-②
Oversize Round	24V AC/DC LED 24V AC/DC Incandescent	HA1P-1C04-② HA1P-1C07-②	HA1P-1C04V-② HA1P-1C07V-②
Oversize Square	24V AC/DC LED 24V AC/DC Incandescent	HA2P-1C04-② HA2P-1C07-②	HA2P-1C04V-② HA2P-1C07V-②
Oversize Round Unibody	24V AC/DC LED 24V AC/DC Incandescent	HA1P-14-② HA1P-17-②	—
Oversize Square Unibody	24V AC/DC LED 24V AC/DC Incandescent	HA2P-14-② HA2P-17-②	—

② Lens/LED Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

Voltage/Lamp Code

Voltage	Code
5V DC LED	1
6V AC/DC LED	2
12V AC/DC LED	3
24V AC/DC LED	4
120 V AC LED	8
6V AC/DC Incandescent	5
12V AC/DC Incandescent	6
24V AC/DC Incandescent	7



1. In place of ② specify Lens/LED Color Code from table.
2. Lamps also available in 5VDC, 6V AC/DC, 12V AC/DC or 120V AC, change “4” or “7” using Voltage/Lamp Codes (ie LA1P-1C03-② uses 12V AC/DC LED).

Pilot Lights (Sub-Assembled)

Terminals + Safety Lever Lock + Lamp Holder + Lamp + Operator + Lens = Completed Unit



A2

Switches & Pilot Devices

Part Numbers: Operators

Style	Part Number
Round	LA1P-0
Square	LA2P-0
Rectangular	LA3P-0
Oversize Round	HA1P-0
Oversize Square	HA2P-0
Oversize Round Unibody	HA1P-00
Oversize Square Unibody	HA2P-00

Part Numbers: Lenses

Style	Part Number
Round	AL6M-LK3-②
Square	AL6Q-LK3-②
Rectangular	AL6H-LK3-②
Oversize Round	HA1A-P1-②
Oversize Square	HA2A-P1-②



In place of ② specify lens color code.

Part Numbers: Lamps

Style	Voltage	Part Number
LED	5V DC 6V AC/DC 12V AC/DC 24V AC/DC 120 V AC	LFTD-5② LFTD-6② LFTD-1② LFTD-2② LFTD-H2②
Incandescent	6V AC/DC 12V AC/DC 24V AC/DC	LH-06 LH-14 LH-28



In place of ② specify LED color code from table below.

Part Numbers: Terminals

Appearance	Solder Tab	PCB
	HA-C00	HA-C00V



Not required for unibody models.

Part Number: Lamp Holder

Appearance	Part Number
	HA9Z-AH

Part Number: Safety Lever Lock

Appearance	Part Number
	HA9Z-LS

② Lens/LED Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y

Illuminated Pushbuttons (Assembled)

Part Numbers: Illuminated Pushbuttons

Style	Operation	Lamp Voltage	Contact	Terminal Style	
				Solder Tab	PCB
	Momentary	24V AC/DC LED	SPDT DPDT	LA1L-M1C54-② LA1L-M1C64-②	LA1L-M1C14V-② LA1L-M1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	LA1L-M1C57-② LA1L-M1C67-②	LA1L-M1C17V-② LA1L-M1C27V-②
	Maintained	24V AC/DC LED	SPDT DPDT	LA1L-A1C54-② LA1L-A1C64-②	LA1L-A1C14V-② LA1L-A1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	LA1L-A1C57-② LA1L-A1C67-②	LA1L-A1C17V-② LA1L-A1C27V-②
	Momentary	24V AC/DC LED	SPDT DPDT	LA2L-M1C54-② LA2L-M1C64-②	LA2L-M1C14V-② LA2L-M1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	LA2L-M1C57-② LA2L-M1C67-②	LA2L-M1C17V-② LA2L-M1C27V-②
	Maintained	24V AC/DC LED	SPDT DPDT	LA2L-A1C54-② LA2L-A1C64-②	LA2L-A1C14V-② LA2L-A1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	LA2L-A1C57-② LA2L-A1C67-②	LA2L-A1C17V-② LA2L-A1C27V-②
	Momentary	24V AC/DC LED	SPDT DPDT	LA3L-M1C54-② LA3L-M1C64-②	LA3L-M1C14V-② LA3L-M1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	LA3L-M1C57-② LA3L-M1C67-②	LA3L-M1C17V-② LA3L-M1C27V-②
	Maintained	24V AC/DC LED	SPDT DPDT	LA3L-A1C54-② LA3L-A1C64-②	LA3L-A1C14V-② LA3L-A1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	LA3L-A1C57-② LA3L-A1C67-②	LA3L-A1C17V-② LA3L-A1C27V-②
	Momentary	24V AC/DC LED	SPDT DPDT	HA1L-M1C54-② HA1L-M1C64-②	HA1L-M1C14V-② HA1L-M1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	HA1L-M1C57-② HA1L-M1C67-②	HA1L-M1C17V-② HA1L-M1C27V-②
	Maintained	24V AC/DC LED	SPDT DPDT	HA1L-A1C54-② HA1L-A1C64-②	HA1L-A1C14V-② HA1L-A1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	HA1L-A1C57-② HA1L-A1C67-②	HA1L-A1C17V-② HA1L-A1C27V-②
	Momentary	24V AC/DC LED	SPDT DPDT	HA2L-M1C54-② HA2L-M1C64-②	HA2L-M1C14V-② HA2L-M1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	HA2L-M1C57-② HA2L-M1C67-②	HA2L-M1C17V-② HA2L-M1C27V-②
	Maintained	24V AC/DC LED	SPDT DPDT	HA2L-A1C54-② HA2L-A1C64-②	HA2L-A1C14V-② HA2L-A1C24V-②
		24V AC/DC Incandescent	SPDT DPDT	HA2L-A1C57-② HA2L-A1C67-②	HA2L-A1C17V-② HA2L-A1C27V-②
	Momentary	24V AC/DC LED	SPDT DPDT	HA1L-M3C54-② HA1L-M3C64-②	HA1L-M3C14V-② HA1L-M3C24V-②
		24V AC/DC Incandescent	SPDT DPDT	HA1L-M3C57-② HA1L-M3C67-②	HA1L-M3C17V-② HA1L-M3C27V-②
	Maintained	24V AC/DC LED	SPDT DPDT	HA1L-A3C54-② HA1L-A3C64-②	HA1L-A3C14V-② HA1L-A3C24V-②
		24V AC/DC Incandescent	SPDT DPDT	HA1L-A3C57-② HA1L-A3C67-②	HA1L-A3C17V-② HA1L-A3C27V-②

② Lens Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

Voltage/Lamp Code

Voltage	Code
5V DC LED	1
6V AC/DC LED	2
12V AC/DC LED	3
24V AC/DC LED	4
120V AC LED	8
6V AC/DC Incandescent	5
12V AC/DC Incandescent	6
24V AC/DC Incandescent	7



- In place of ② specify lens color code from table at right.
- Lamps also available in 5V DC, 6V AC/DC, 12 V AC/DC or 120V AC, change “4” or “7” using voltage/lamp codes (ie LA1P-1C03-② uses 12V AC/DC LED).
- PCB terminal models also available with silver contacts (change “1” or “2” to “5” or “6” respectively, ie LA1L-M1C14V-① becomes LA1L-M1C54V-①).

Illuminated Pushbuttons (Sub-Assembled)

A2

Switches & Pilot Devices

Contacts + Safety Lever Lock + Lamp Holder + Lamp + Operator + Lens = Completed Unit



Part Numbers: Operators

Style	Momentary	Maintained
Round	LA1L-M0	LA1L-A0
Square	LA2L-M0	LA2L-A0
Rectangular	LA3L-M0	LA3L-A0
Oversize Round	HA1L-M0	HA1L-A0
Oversize Square	HA2L-M0	HA2L-A0
Mushroom	HA1B-M0L	HA1B-A0L

Part Numbers: Lenses

Style	Part Number
Round	AL6M-LK2-②
Square	AL6Q-LK2-②
Rectangular	AL6H-LK2-②
Oversize Round	HA1A-L1-②
Oversize Square	HA2A-L1-②
Mushroom	HA1A-L3-②



In place of ② specify Lens Color Code from table.

Part Numbers: Lamps

Appearance	Voltage	Part Number
LED	5V DC 6V AC/DC 12V AC/DC 24V AC/DC 120V AC	LFTD-5② LFTD-6② LFTD-1② LFTD-2② LFTD-H2②
Incandescent	6V AC/DC 12V AC/DC 24V AC/DC	LH-06 LH-14 LH-28



In place of ② specify LED color code from table below.

Part Numbers: Contacts

Appearance	Contacts	Terminal Style	
		Solder Tab	PCB
Gold	SPDT DPDT	HA-C10 HA-C20	HA-C10V HA-C20V
Silver	SPDT DPDT	HA-C50 HA-C60	HA-C50V HA-C60V

Part Number: Lamp Holder

Appearance	Part Number
HA9Z-AH	

Part Number: Safety Lever Lock

Appearance	Part Number
HA9Z-LS	

② Lens/LED Color Codes

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

Selector Switches (Assembled)





Part Numbers: Selector Switches

A2

Switches & Pilot Devices

Style		Position		Contact	Terminal Style	
					Solder Tab	PCB
Round 	90° 2-Position	Maintained		DPDT	LA1S-2C6	LA1S-2C2V
		Spring return from right		DPDT	LA1S-21C6	LA1S-21C2V
	45° 3-Position	Maintained		DPDT	LA1S-3C6	LA1S-3C2V
		Spring return from right		DPDT	LA1S-31C6	LA1S-31C2V
		Spring return from left		DPDT	LA1S-32C6	LA1S-32C2V
		2-Way spring return		DPDT	LA1S-33C6	LA1S-33C2V
Square 	90° 2-Position	Maintained		DPDT	LA2S-2C6	LA2S-2C2V
		Spring return from right		DPDT	LA2S-21C6	LA2S-21C2V
	45° 3-Position	Maintained		DPDT	LA2S-3C6	LA2S-3C2V
		Spring return from right		DPDT	LA2S-31C6	LA2S-31C2V
		Spring return from left		DPDT	LA2S-32C6	LA2S-32C2V
		2-Way spring Return		DPDT	LA2S-33C6	LA2S-33C2V
Rectangular 	90° 2-Position	Maintained		DPDT	LA3S-2C6	LA3S-2C2V
		Spring return from right		DPDT	LA3S-21C6	LA3S-21C2V
	45° 3-Position	Maintained		DPDT	LA3S-3C6	LA3S-3C2V
		Spring return from right		DPDT	LA3S-31C6	LA3S-31C2V
		Spring return from left		DPDT	LA3S-32C6	LA3S-32C2V
		2-Way spring Return		DPDT	LA3S-33C6	LA3S-33C2V
Oversize Round 	90° 2-Position	Maintained		DPDT	HA1S-2C6	HA1S-2C2V
		Spring return from right		DPDT	HA1S-21C6	HA1S-21C2V
	45° 3-Position	Maintained		DPDT	HA1S-3C6	HA1S-3C2V
		Spring return from right		DPDT	HA1S-31C6	HA1S-31C2V
		Spring return from left		DPDT	HA1S-32C6	HA1S-32C2V
		2-Way spring Return		DPDT	HA1S-33C6	HA1S-33C2V

Contact Operations (for all selectors)

Contacts	Operator Position and Contact Operation	
2-pos. (DPDT)	Left	
	Right	
3-pos. (DPDT)	Left	
	Center	
	Right	



As viewed from front of switch.



1. All assembled selector switches use DPDT contacts.
2. For SPDT contacts see sub-components on next page.
3. PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie LA1S-21C2V becomes LA1S-21C6V).

Selector Switches (Sub-Assembled)

Contacts + **Safety Lever Lock** + **Operator** = **Complete Part**



Part Numbers: Operators

Style	Position	Function	Part Number
Round 	2	Maintained Spring from right	LA1S-2Y LA1S-21Y
	3	Maintained Spring from right Spring from left Spring from both	LA1S-3Y LA1S-31Y LA1S-32Y LA1S-33Y
Square 	2	Maintained Spring from right	LA2S-2Y LA2S-21Y
	3	Maintained Spring from right Spring from left Spring from both	LA2S-3Y LA2S-31Y LA2S-32Y LA2S-33Y
Rectangular 	2	Maintained Spring from right	LA3S-2Y LA3S-21Y
	3	Maintained Spring from right Spring from left Spring from both	LA3S-3Y LA3S-31Y LA3S-32Y LA3S-33Y
Oversize Round 	2	Maintained Spring from right	HA1S-2Y HA1S-21Y
	3	Maintained Spring from right Spring from left Spring from both	HA1S-3Y HA1S-31Y HA1S-32Y HA1S-33Y

Part Numbers: Contacts

Appearance			Contacts	Terminal Style	
				Solder Tab	PCB
		Gold	SPDT DPDT	HA-C1 HA-C2	HA-C1V HA-C2V
		Silver	SPDT DPDT	HA-C5 HA-C6	HA-C5V HA-C6V



1. All assembled switches listed on previous page use DPDT contacts.
2. SPDT Contacts for use on 2 position selector switch only

Part Number: Safety Lever Lock

Appearance	Part Number
	HA9Z-LS

A2

Switches & Pilot Devices

Key Switches (Assembled)

Part Numbers: Key Switches

Style		Operation		Contacts	Terminal Type	
					Solder Tab	PCB
Round	90° 2-Position	Maintained		DPDT	LA1K-2C6③	LA1K-2C2V③
		Spring return from right		DPDT	LA1K-21C6B	LA1K-21C2VB
	45° 3-Position	Maintained		DPDT	LA1K-3C6③	LA1K-3C2V③
		Spring return from right		DPDT	LA1K-31C6③	LA1K-31C2V③
		Spring return from left		DPDT	LA1K-32C6③	LA1K-32C2V③
		2-Way spring return		DPDT	LA1K-33C6D	LA1K-33C2VD
Square	90° 2-Position	Maintained		DPDT	LA2K-2C6③	LA2K-2C2V③
		Spring return from right		DPDT	LA2K-21C6B	LA2K-21C2VB
	45° 3-Position	Maintained		DPDT	LA2K-3C6③	LA2K-3C2V③
		Spring return from right		DPDT	LA2K-31C6③	LA2K-31C2V③
		Spring return from left		DPDT	LA2K-32C6③	LA2K-32C2V③
		2-Way spring return		DPDT	LA2K-33C6D	LA2K-33C2VD
Rectangular	90° 2-Position	Maintained		DPDT	LA3K-2C6③	LA3K-2C2V③
		Spring return from right		DPDT	LA3K-21C6B	LA3K-21C2VB
	45° 3-Position	Maintained		DPDT	LA3K-3C6③	LA3K-3C2V③
		Spring return from right		DPDT	LA3K-31C6③	LA3K-31C2V③
		Spring return from left		DPDT	LA3K-32C6③	LA3K-32C2V③
		2-Way spring return		DPDT	LA3K-33C6D	LA3K-33C2VD
Oversize Round	90° 2-Position	Maintained		DPDT	HA1K-2C6③	HA1K-2C2V③
		Spring return from right		DPDT	HA1K-21C6B	HA1K-21C2VB
	45° 3-Position	Maintained		DPDT	HA1K-3C6③	HA1K-3C2V③
		Spring return from right		DPDT	HA1K-31C6③	HA1K-31C2V③
		Spring return from left		DPDT	HA1K-32C6③	HA1K-32C2V③
		2-Way spring return		DPDT	HA1K-33C6D	HA1K-33C2VD

Contact Operations (for all selectors)

Contacts	Operator Position and Contact Operation	
2-pos. (DPDT)	Left	
	Right	
3-pos. (DPDT)	Left	
	Center	
	Right	



As viewed from front of switch.

③ Key Retention Option Codes

Code	Description
A	Key not retained in any position (removable in all positions)
B	Key retained in right position only
C	Key retained in left position only
D	Key retained in left and right (3 position only)
E	Key retained in center only (3 position only)
G	Key retained right and center (3 position only)
H	Key retained left and center (3 position only)



Key cannot be removed from a spring-return position.



1. In place of ③ specify Key Retention Code from next page.
2. All assembled key switches have DPDT contacts. For SPDT see sub-assembled on next page.
3. PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie LA1K-2C2V③ becomes LA1K-2C6V③).

Key Switches (Sub-Assembled)



Part Numbers: Operators

Style	Positions	Operation	Part Number
Round 	2	Maintained Spring from right	LA1K-2③ LA1K-21B
	3	Maintained Spring from right Spring from left Spring from both	LA1K-3③ LA1K-31③ LA1K-32③ LA1K-33D
Square 	2	Maintained Spring from right	LA2K-2③ LA2K-21B
	3	Maintained Spring from right Spring from left Spring from both	LA2K-3③ LA2K-31③ LA2K-32③ LA2K-33D
Rectangular 	2	Maintained Spring from right	LA3K-2③ LA3K-21B
	3	Maintained Spring from right Spring from left Spring from both	LA3K-3③ LA3K-31③ LA3K-32③ LA3K-33D
Oversize Round 	2	Maintained Spring from right	HA1K-2③ HA1K-21B
	3	Maintained Spring from right Spring from left Spring from both	HA1K-3③ HA1K-31③ HA1K-32③ HA1K-33D



1. In place of ③ specify key removable code from table on right.
2. Operator includes two keys.

Part Numbers: Contacts

Appearance	Contacts	Terminal Style	
		Solder Tab	PCB
	Gold	SPDT DPDT	HA-C1 HA-C2 HA-C1V HA-C2V
	Silver	SPDT DPDT	HA-C5 HA-C6 HA-C5V HA-C6V



1. All assembled selectors listed on previous page use DPDT contacts.
2. SPDT contacts are for use on 2 position key switches only.

Part Number: Safety Lever Lock

Appearance	Part Number
	HA9Z-LS

③ Key Retention Option Codes

Code	Description
A	Key not retained in any position (removable in all positions)
B	Key retained in right position only
C	Key retained in left position only
D	Key retained in left and right (3 position only)
E	Key retained in center only (3 position only)
G	Key retained right and center (3 position only)
H	Key retained left and center (3 position only)







Key cannot be removed from a spring-return position.

Illuminated Selector Switches

Part Numbers: Illuminated Selectors Switches

Style				Contact	Voltage	Terminal Style	
						Solder Tab	PCB
Round 	90° 2-Position	Maintained		DPDT	24V LED 24V Incand.	LA1F-2C64-② LA1F-2C67-②	LA1F-2C24V-② LA1F-2C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	LA1F-21C64-② LA1F-21C67-②	LA1F-21C24V-② LA1F-21C27V-②
	45° 3-Position	Maintained		DPDT	24V LED 24V Incand.	LA1F-3C64-② LA1F-3C67-②	LA1F-3C24V-② LA1F-3C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	LA1F-31C64-② LA1F-31C67-②	LA1F-31C24V-② LA1F-31C27V-②
		Spring return from left		DPDT	24V LED 24V Incand.	LA1F-32C64-② LA1F-32C67-②	LA1F-32C24V-② LA1F-32C27V-②
		2-Way spring return		DPDT	24V LED 24V Incand.	LA1F-33C64-② LA1F-33C67-②	LA1F-33C24V-② LA1F-33C27V-②
Square 	90° 2-Position	Maintained		DPDT	24V LED 24V Incand.	LA2F-2C64-② LA2F-2C67-②	LA2F-2C24V-② LA2F-2C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	LA2F-21C64-② LA2F-21C67-②	LA2F-21C24V-② LA2F-21C27V-②
	45° 3-Position	Maintained		DPDT	24V LED 24V Incand.	LA2F-3C64-② LA2F-3C67-②	LA2F-3C24V-② LA2F-3C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	LA2F-31C64-② LA2F-31C67-②	LA2F-31C24V-② LA2F-31C27V-②
		Spring return from left		DPDT	24V LED 24V Incand.	LA2F-32C64-② LA2F-32C67-②	LA2F-32C24V-② LA2F-32C27V-②
		2-Way spring return		DPDT	24V LED 24V Incand.	LA2F-33C64-② LA2F-33C67-②	LA2F-33C24V-② LA2F-33C27V-②
Rectangular 	90° 2-Position	Maintained		DPDT	24V LED 24V Incand.	LA3F-2C64-② LA3F-2C67-②	LA3F-2C24V-② LA3F-2C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	LA3F-21C64-② LA3F-21C67-②	LA3F-21C24V-② LA3F-21C27V-②
	45° 3-Position	Maintained		DPDT	24V LED 24V Incand.	LA3F-3C64-② LA3F-3C67-②	LA3F-3C24V-② LA3F-3C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	LA3F-31C64-② LA3F-31C67-②	LA3F-31C24V-② LA3F-31C27V-②
		Spring return from left		DPDT	24V LED 24V Incand.	LA3F-32C64-② LA3F-32C67-②	LA3F-32C24V-② LA3F-32C27V-②
		2-Way spring return		DPDT	24V LED 24V Incand.	LA3F-33C64-② LA3F-33C67-②	LA3F-33C24V-② LA3F-33C27V-②
Oversize Round 	90° 2-Position	Maintained		DPDT	24V LED 24V Incand.	HA1F-2C64-② HA1F-2C67-②	HA1F-2C24V-② HA1F-2C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	HA1F-21C64-② HA1F-21C67-②	HA1F-21C24V-② HA1F-21C27V-②
	45° 3-Position	Maintained		DPDT	24V LED 24V Incand.	HA1F-3C64-② HA1F-3C67-②	HA1F-3C24V-② HA1F-3C27V-②
		Spring return from right		DPDT	24V LED 24V Incand.	HA1F-31C64-② HA1F-31C67-②	HA1F-31C24V-② HA1F-31C27V-②
		Spring return from left		DPDT	24V LED 24V Incand.	HA1F-32C64-② HA1F-32C67-②	HA1F-32C24V-② HA1F-32C27V-②
		2-Way spring return		DPDT	24V LED 24V Incand.	HA1F-33C64-② HA1F-33C67-②	HA1F-33C24V-② HA1F-33C27V-②

Contact Operations
(for all selectors)

Contacts	Operator Position and Contact Operation	
2-pos. (DPDT)	Left	
	Right	
3-pos. (DPDT)	Left	
	Center	
	Right	



As viewed from front of switch.

② Lens/LED Color Code

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

Voltage/Lamp Code

Voltage	Code
5V DC LED	1
6V AC/DC LED	2
12V AC/DC LED	3
24V AC/DC LED	4
120V AC LED	8
6V AC/DC Incandescent	5
12V AC/DC Incandescent	6
24V AC/DC Incandescent	7



- In place of ② specify Lens/LED Color Code from table above.
- Lamps also available in 5V DC, 6V AC/DC or 12 V AC/DC, change "4" or "7" using voltage/lamp codes (ie LA1F-2C63-② uses 12V AC/DC LED).
- All switches listed have DPDT contacts. For SPDT see sub-assembled on next page.
- PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie LA1F-2C24V-② becomes LA1F-2C64V-②).

Illuminated Selector Switches (Sub-Assembled)

Contacts + Safety lever lock + Lamp Holder + Lamp + Operator + Lens/Handle = Completed Unit

A2

Switches & Pilot Devices

Part Numbers: Operators

Style	Positions	Function	Part Number
	2	Maintained Spring from right	LA1F-20 LA1F-210
	3	Maintained Spring from right Spring from left Spring from both	LA1F-30 LA1F-310 LA1F-320 LA1F-330
	2	Maintained Spring from right	LA2F-20 LA2F-210
	3	Maintained Spring from right Spring from left Spring from both	LA2F-30 LA2F-310 LA2F-320 LA2F-330
	2	Maintained Spring from right	LA3F-20 LA3F-210
	3	Maintained Spring from right Spring from left Spring from both	LA3F-30 LA3F-310 LA3F-320 LA3F-330
	2	Maintained Spring from right	HA1F-20 HA1F-210
	3	Maintained Spring from right Spring from left Spring from both	HA1F-30 HA1F-310 HA1F-320 HA1F-330

Part Numbers: Lenses/Handles

Appearance	Part Number
	LA1A-F-②
	HA1A-F-②

 In place of ② specify Lens Color Code from table.

Part Number: Safety Lever Lock

Appearance	Part Number
	HA9Z-LS

Part Numbers: Contacts

Appearance	Terminal Style		
	Contacts	Solder Tab	PCB
	Gold	SPDT DPDT	HA-C1 HA-C2 HA-C10V HA-C20V
	Silver	SPDT DPDT	HA-C50 HA-C60 HA-C50V HA-C60V



1. All assembled selectors on previous pages use DPDT contacts. SPDT contacts are for use only on two position selectors.

② LED/Lens Color Code

Color	Code
Amber	A
Green	G
Red	R
Blue	S
Yellow	Y
White	W

Part Number: Lamp Holder

Appearance	Part Number
	HA9Z-AH

Part Numbers: Lamps

Appearance	Voltage	Part Numbers
	5V DC 6V AC/DC 12V AC/DC 24V AC/DC 120V AC	LFTD-5② LFTD-6② LFTD-1② LFTD-2② LFTD-H2②
	6V AC/DC 12V AC/DC 24V AC/DC	LH-06 LH-14 LH-28



In place of ② specify LED Color Code from table.

Pushbutton Selectors (Assembled)

Part Numbers: Pushbutton Selectors

Style		Terminal Style	
		Solder Tab	PCB
	2 Position	HA1R-2C6-①	HA1R-2C2V-①
	3 Position	HA1R-3C6-①	HA1R-3C2V-①

① Button Color Code

Color	Code
Black	B
Green	G
Red	R
Blue	S
Yellow	Y



1. In place of ① specify Button Color Code.
2. PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie HA1R-2C2V-① becomes HA1R-2C6V-①).

Contact Operation

Style	Operator Position					
	Left		Center		Right	
	Normal	Depressed	Normal	Depressed	Normal	Depressed
2 Position			—	—		
3 Position				Blocked		

Lever Switch (Assembled)

Part Numbers: Lever Switches

Style	Operation			Contacts	Terminal Type	
					Solder Tab	PCB
	2-Position	Maintained		DPDT	LA1T-2C6	LA1T-2C2V
		Spring return from top		DPDT	LA1T-21C6	LA1T-21C2V
		Spring Return from bottom		DPDT	LA1T-22C6	LA1T-22C2V
	3-Position	Maintained		DPDT	LA1T-3C6	LA1T-3C2V
		Spring return from top		DPDT	LA1T-31C6	LA1T-31C2V
		Spring return from bottom		DPDT	LA1T-32C6	LA1T-32C2V
		Spring return from both		DPDT	LA1T-33C6	LA1T-33C2V



PCB terminal models also available with silver contacts (change "1" or "2" to "5" or "6" respectively, ie LA1T-2C2V becomes LA1T-2C6V).

Contact Operation

Contacts		Operator Position & Contact Operation		
		Down	Center	Up
2-pos. (DPDT)	Maintained Spring from Top			
2-pos (DPDT).	Spring Return from Bottom			
3-pos. (DPDT)	All models			



As viewed from front of switch.

Accessories


Part		Specifications		Part Number	Notes
Ring Wrench		Made of metal		MT-001	Used for tightening the plastic locking ring when installing the L6 series unit on a panel. Tightening torque should not exceed 9kgf cm when tightening a locking ring.
Lamp Holder Tool (Made of Rubber)		Made of rubber. Used for removing and replacing LED and incandescent lamps in illuminated units.		OR-44	Rubber tool used for replacing LED and incandescent lamps.
Lens Removal Tool		For Illuminated pushbuttons and pilot lights.		MT-101	Used for removing the lens or button from the housing.
LED Lamp		5V DC 6V AC/DC 12V AC/DC 24V AC/DC 120V AC		LFTD-5② LFTD-6② LFTD-1② LFTD-2② LFTD-H2②	T 1-3/4 miniature flange base. In place of ② specify LED Color Code (see page A2-43).
Incandescent Lamp		6V AC/DC 12V AC/DC 24V AC/DC		LH-06 LH-14 LH-28	0.5W, T 1-3/4 miniature flange base
Switch Guard		90 degrees opening maintained	Round/Square	AL-K6	Prevents inadvertent switch operation. IP40 dust-tight rated.
			Rectangular	AL-KH6	
		180 degrees opening, spring return	Round/Square	AL-K6SP	Prevents inadvertent switch operation. IP65 oiltight rated.
			Rectangular	AL-KH6SP	
Dust-proof Cover		For round units		AL-D6	Provides extra level of sealing for "front-panel" portion of switches. (Not applicable for units with oversize lenses or buttons).
		For square units		AL-DQ6	
		For rectangular units		AL-DH6	
Terminal Cover		Made of white nylon	All removable contacts	H6-VL2	Covers terminals to prevent possible electric shock.
			Unibody Pilot Lights	H6-PVL	
Mounting Hole Plug		Rubber		AL-B6	Fills unused panel cutouts. Made of nitrile rubber. Push-in installation from front of panel. IP65 (oiltight) rated.
		Aluminum		AL-BM6	Fills unused panel cutouts. Made of aluminum. Screw-on locking ring from inside of panel. IP65 (oiltight) rated.
Replacement Keys		for LA1K (#132)		AS6-SK	Pair of keys.
		for HA1K (#231)		KG9Z-SK	
Replacement Engraving Inserts			Round Square Rectangle Oversize Round Oversize Square Mushroom	AL6M-W AL6Q-W AL6H-W HA9Z-P1-W HA9Z-P2-W HA9Z-P13-W	
Replacement Locking Ring		All models		HA9Z-LN	
Replacement Anti-Rotation Ring			L6 standard	AL6-LP	Prevents rotation of switches in panel. (included with all assembled switches)
			L6 oversize	HA9Z-LP	
Replacement Selector Inserts				HA9Z-HC1-①	Applicable to round oversize selectors only ① = (G, R, S, W, Y)
Replacement Safety Lever Lock				HA9Z-LS	

A2


Switches & Pilot Devices

Dimensions


Non-Illuminated Pushbuttons (LA*B)

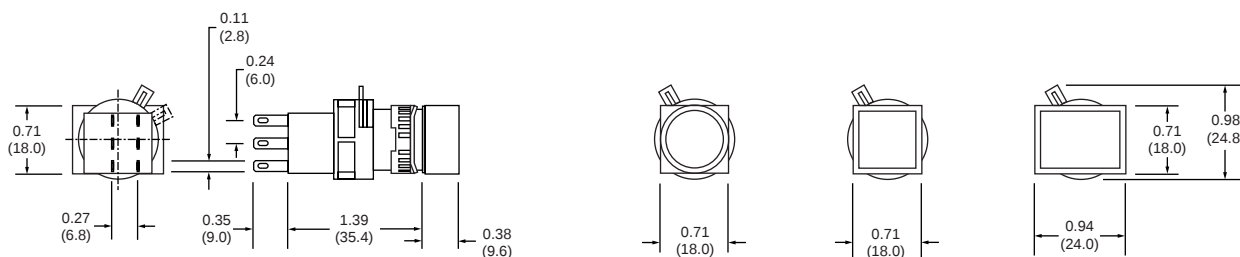


Emergency Stop Switch (HA1B)

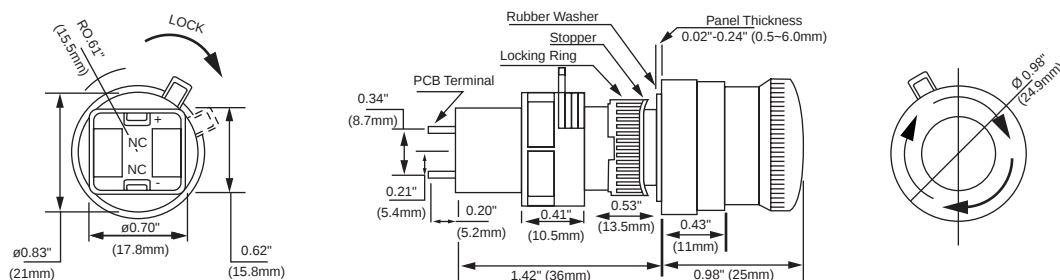


Emergency Stop Switch (HA1E) - Short Body Style

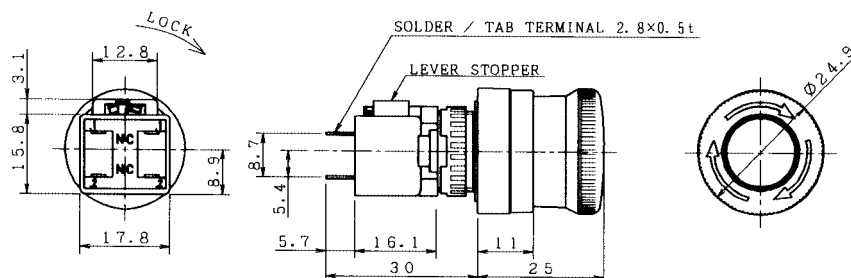

Buzzer (LA3Z)

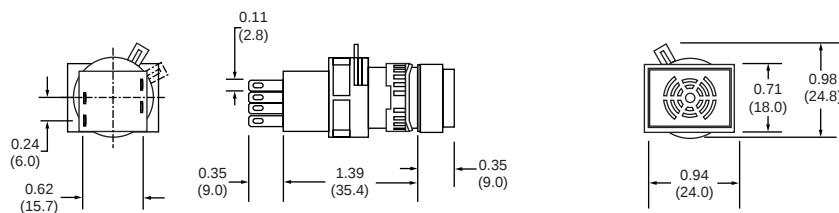

Pilot Lights (LA*P)

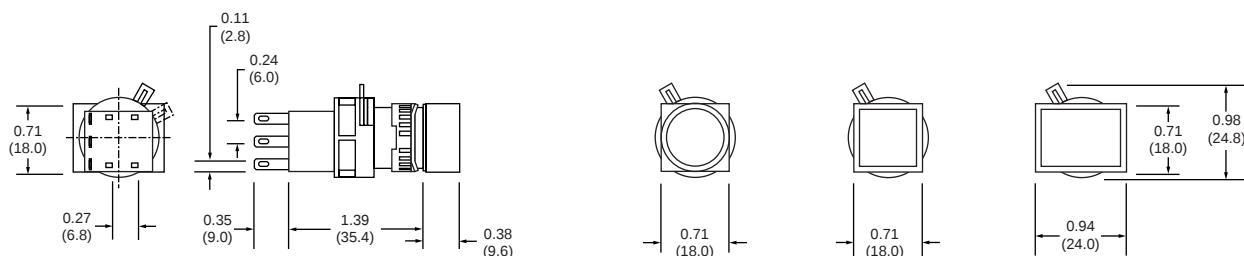


Dimensions in inches


A2

Switches & Pilot Devices


Illuminated Pushbuttons (LA*L)

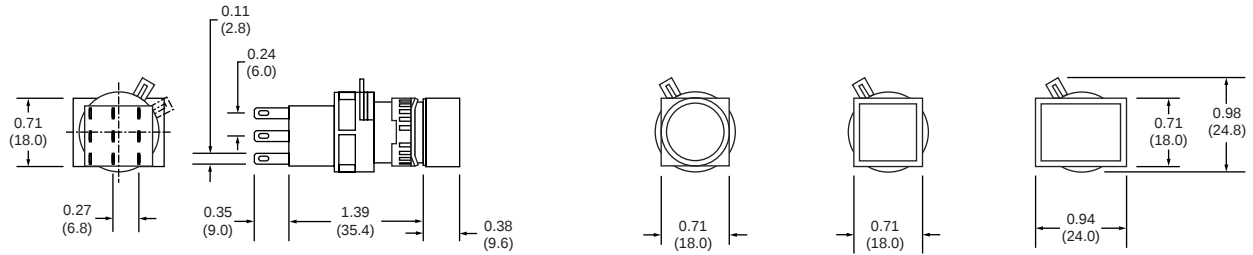


Key Switches (LA*K)

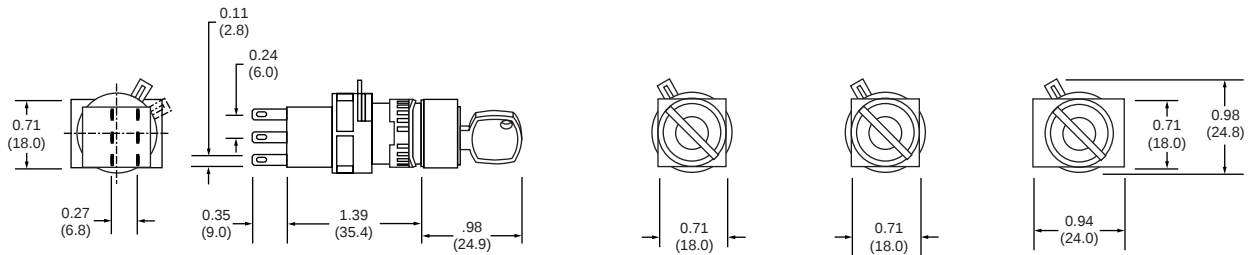


Selector Switches (LA*S)

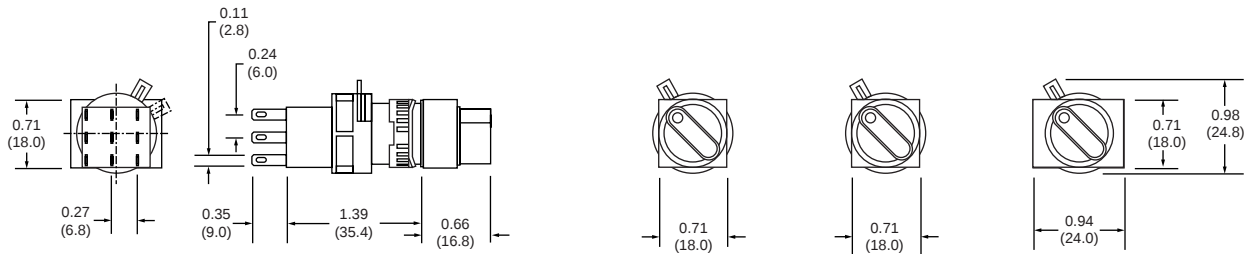


Panel Cut-Out



PCB Layout (except for Buzzer and E-Stop)

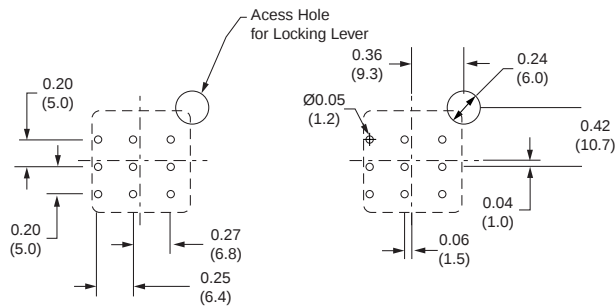


PCB Pins

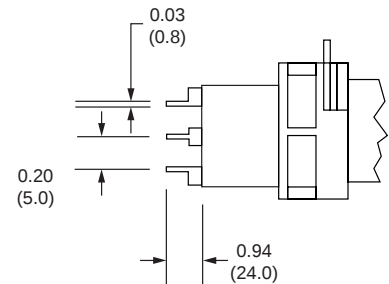

HA1B E-Stop


PCB Mounting Pattern




Dimensions in inches [mm]

Enlarge Flush Pushbutton and Pilot Lights


A2

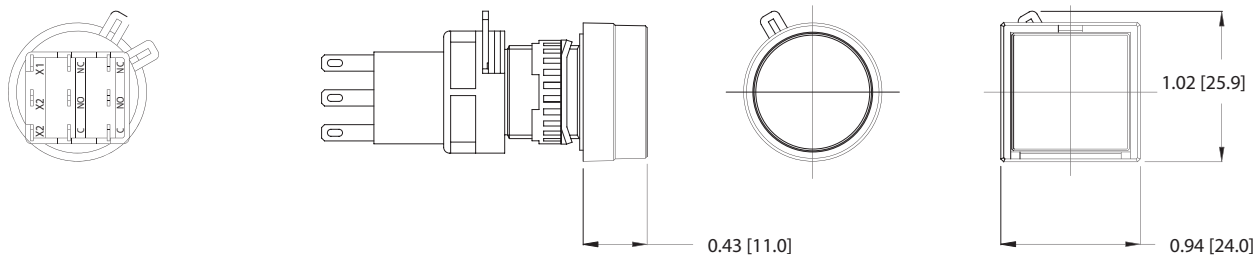


Enlarge Extended Non-Illuminated Pushbutton

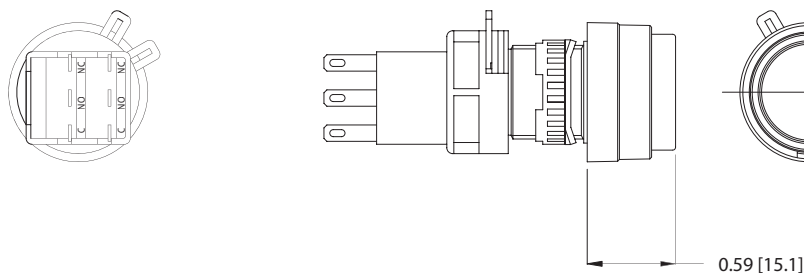


Enlarge Unibody Pilot Lights

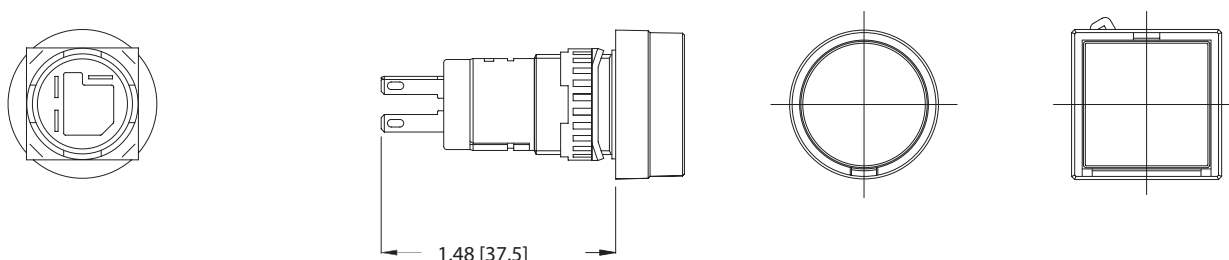

Mushroom Pushbuttons

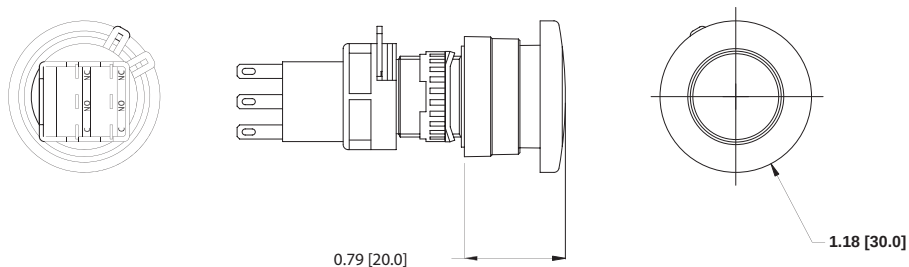


Enlarge Selector Switch

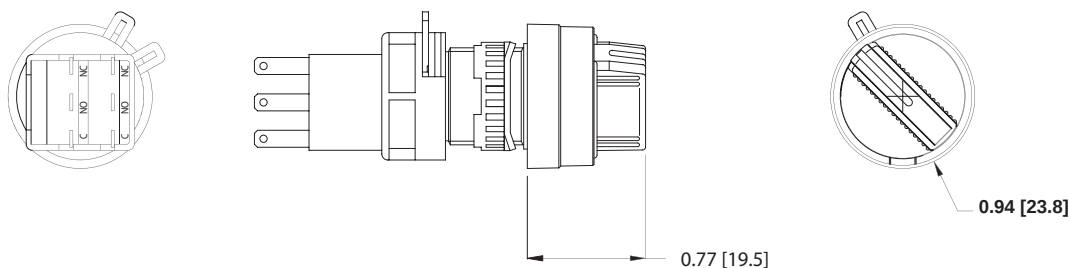


Dimensions con't

Oversize Key Switch

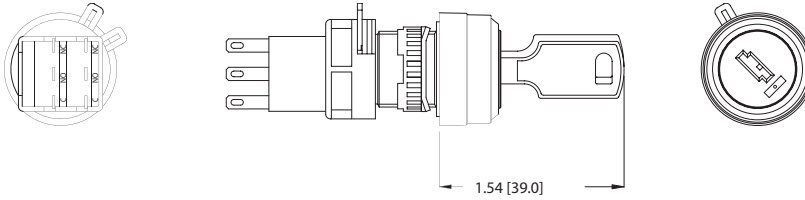


Lever Switch

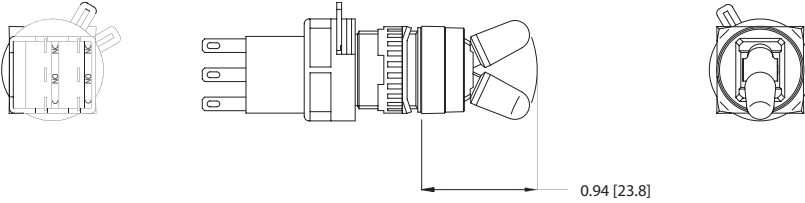


Terminal Configurations


Non Illuminated Pushbutton




Pilot Lights





Illuminated Pushbuttons




Buzzer

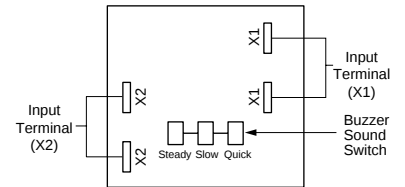


AL-KH6SP

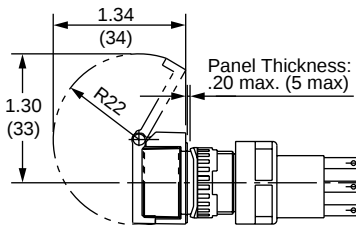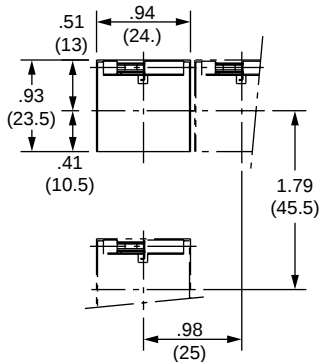


AL-K6SP

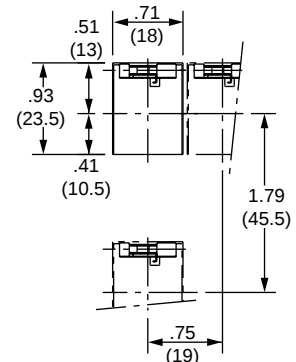


AL-D6



AL-DQ6



AL-DH6




A2


Switches & Pilot Devices

Dimensions con't


H6-VL2

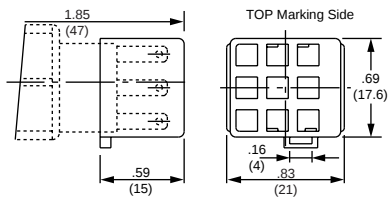

AL-B6






AL-BM6



LED Lamp

Internal Circuit



- LED Chip
- Protective Diode
- Zener Diode

General Instructions**Pushbutton Assembly****Lamp Installation**


Lamps can be replaced in two ways:

1. If contacts are accessible (or pushbutton not installed in a panel) then it is easiest to first remove the contacts from the operator. This will allow easy access to the lamp/lamp-holder assembly. Grab lamp, depress slightly, and turn counter clockwise. Lamp can then be removed by pushing it back through the lamp holder.

2. If contacts are not accessible, then the lamp can be replaced by first removing the lens from the operator. Just pull lens straight out either with a fingernail or optional lens removal tool (MT-101). Lamp/lamp-holder assembly can then be removed with lamp removal tool (OR-44). Insert lamp removal tool through operator, depress slightly, turn counter clockwise, then pull lamp/lamp-holder assembly out. Lamp can then be removed by pushing it back through the lamp holder.

Engraving Lenses

All buttons and lenses can be engraved directly on the outside surface. Illuminated lenses also allow for engraving on a plate that is underneath the colored section of the lens. Remove the colored section of the lens by pulling on the edge while simultaneously unhooking it from the latches on the lens holder. The marking plate will then be accessible. It can then be engraved or a thin marked insert (such as mylar or paper) can be sandwiched between the marking plate and colored section of the lens.

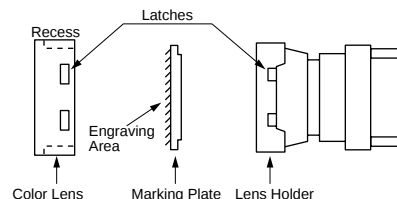**Panel Mounting**

Before any unit can be mounted into a panel, the contact block must be removed. Slide metal locking lever and pull contact off. Loosen and remove the locking ring and square anti-rotation ring from the operator and insert operator through panel cutout from the front of the panel. Slide on anti-rotation ring and tighten locking ring, using locking ring wrench (MT-001). Slide contact block onto operator, observing TOP marking on both parts. Slide metal locking lever in direction indicated by LOCK. The yellow plastic safety lever lock can then be snapped onto the locking lever; this will prevent vibration or maintenance actions from releasing the contact from the operator.

PCB Mounting

Being able to separate the contacts from the operator allows for assembly of the front panel components (operator and lens) to be performed in tandem with the PC board assembly and soldering. For applications where multiple rows of pushbuttons are mounted closely together, or where other components may obstruct access to the contact locking lever, be sure to include access holes in the PC board (refer to PC board layout dimensions for location). Also be sure to allow for space above and to the side of contact to ensure that no components block the contact block locking lever. PC board pins are designed to rest on the PCB, take this into consideration to ensure that pins do not short closely spaced traces.

**A2****Switches & Pilot Devices**