



Single Phase Rectifier Bridge

$$I_{dAV} = 65 \text{ A}$$

$$V_{RRM} = 800-1600 \text{ V}$$

Preliminary data

V_{RSM} V	V_{RRM} V	Types
900	800	VBO 65-08NO7
1300	1200	VBO 65-12NO7
1500	1400	VBO 65-14NO7
1700	1600	VBO 65-16NO7
1900	1800	VBO 65-18NO7

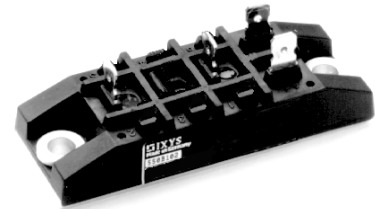

Symbol	Test Conditions	Maximum Ratings
I_{dAV}^*	$T_C = 100^\circ\text{C}$, module	65 A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 1000 A
		$t = 8.3 \text{ ms}$ (60 Hz), sine 1100 A
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 700 A
		$t = 8.3 \text{ ms}$ (60 Hz), sine 750 A
I^2t	$T_{VJ} = 45^\circ\text{C}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 5000 A^2s
		$t = 8.3 \text{ ms}$ (60 Hz), sine 5000 A^2s
	$T_{VJ} = T_{VJM}$ $V_R = 0$	$t = 10 \text{ ms}$ (50 Hz), sine 2450 A^2s
		$t = 8.3 \text{ ms}$ (60 Hz), sine 2330 A^2s
T_{VJ}		-40...+150 $^\circ\text{C}$
T_{VJM}		150 $^\circ\text{C}$
T_{stg}		-40...+125 $^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	2500 V~
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3000 V~
M_d	Mounting torque (M5)	5 $\pm$ 15 % Nm
	(10-32 UNF)	44 $\pm$ 15 % lb.in.
Weight	typ.	110 g

Features

- Package with copper base plate
- Isolation voltage 3000 V~
- Planar passivated chips
- Low forward voltage drop
- 1/4" fast-on power terminals

Applications


- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- Small and light weight

Symbol	Test Conditions	Characteristic Values
I_R	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$	$\leq 0.5 \text{ mA}$
	$V_R = V_{RRM}$; $T_{VJ} = T_{VJM}$	$\leq 10 \text{ mA}$
V_F	$I_F = 150 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$	$\leq 1.4 \text{ V}$
V_{T0}	For power-loss calculations only	0.8 V
r_T	$T_{VJ} = T_{VJM}$	5 $\text{m}\Omega$
R_{thJC}	per diode; DC current	1.12 K/W
	per module	0.28 K/W
R_{thJK}	per diode; DC current	1.5 K/W
	per module	0.375 K/W
d_s	Creeping distance on surface	16.1 mm
d_A	Creepage distance in air	7.5 mm
a	Max. allowable acceleration	50 m/s^2

Dimensions in mm (1 mm = 0.0394")

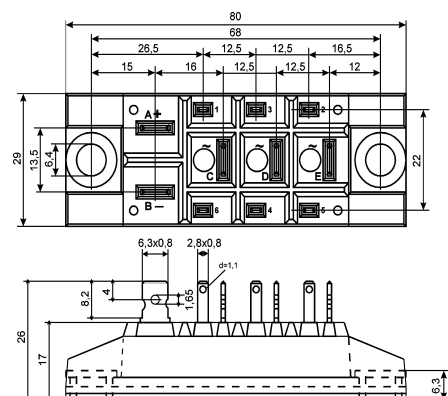

Data according to IEC 60747 refer to a single diode unless otherwise stated

* for resistive load at bridge output. IXYS reserves the right to change limits, test conditions and dimensions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[VBO65-08NO7](#) [VBO65-12NO7](#) [VBO65-14NO7](#) [VBO65-16NO7](#) [VBO65-18NO7](#)