

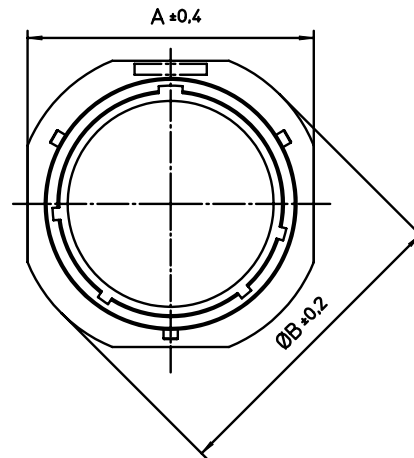


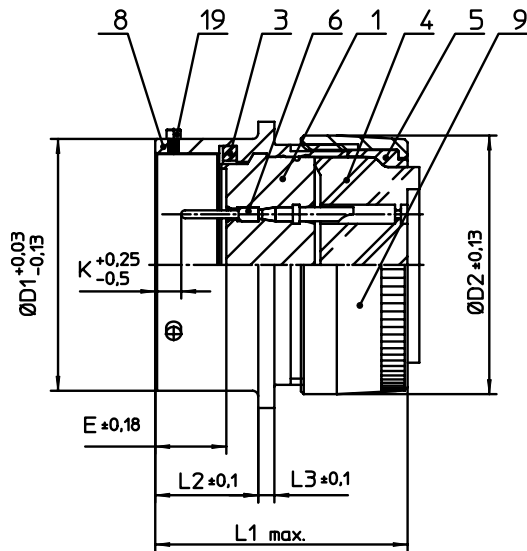

NO.	MASSE / DIMENSION
A	39.6
B	42.8
D1	34.93
D2	35.81
E	9.82
K	3.73
L1	36
L2	14.2
L3	2.2

NO.	BESCHREIBUNG / DESCRIPTION
1	ISOLIERKÖRPER STIFT / INSULATOR PIN
3	DICHTRING / GASKET
4	DICHTKÖRPER / GROMMET
5	ENDRING / ENDRING
6	KONTAKT STIFT / CONTACT PIN
8	GEHÄUSE / RECEPTACLE
9	ENDGEHÄUSE / ENDBELL
19	BAYONETTSTIFT / BAYONET PIN



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:

Shell Material: Aluminium alloy

Shell Plating: Olive drab chromate over cadmium plating

Insulator Material: Polychloroprene

Contact Material: Copper alloy, gold plated

Contact Plating: Copper alloy, gold plated

all dimensions are in mm

Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for

CUSTOMER



Engineered for life

ITT CANNON GmbH
D - 71384 Weinstadt/Germany

description KPT01E2236P

Cable connecting plug

Grommet seal

Solder Cup / Pin / Layout: 22-36

© All rights reserved. Reproduction or issue to third in any form
whenever is only permitted with written authorization of ITT Cannon



page
1/1

revision
485 15. May 14