



Series 100 thru 111 DIP Jumpers

FEATURES

- Wide Array of DIP Jumper Configurations and Wiring Possibilities
- Reliable, Electronically-tested Solder Connections
- Protective Covers Ultrasonically-welded with Strain Relief
- Easy Identification and Tracing with 10-color Cable

GENERAL SPECIFICATIONS

- **HEADER BODY AND COVER:** black UL 94V-0 4/6 Nylon
- **HEADER PINS:** Brass 1/2-hard
- **STANDARD PIN PLATING:** 10 μ [0.25 μ] min. Au per MIL-G-45204 over 50 μ [1.27 μ] min. Ni per QQ-N-290
- **OPTIONAL PLATING:** 200 μ [5.08 μ] min. matte Sn per ASTM B545-97(2004)e1 over 50 μ [1.27mm] min. Ni per QQ-N-290; **—OR—** 200 μ [5.08 μ] 90/10 Sn/Pb per MIL-T-10727 Type I over 50 μ [1.27 μ] min. Ni per QQ-N-290
- **CABLE INSULATION:** UL style 2697 Polyvinyl Chloride (PVC)
- **CABLE LAMINATE:** clear PVC, self-extinguishing*
- **0.050 [1.27] PITCH CONDUCTORS:** 28-AWG, 7/36-strand, tinned Cu per ASTM B 33
- **0.039 [0.99] PITCH CONDUCTORS:** 26-AWG, 7/34-strand)
- **CABLE CURRENT RATING:** 1 amp at 10°C [50°F] above ambient
- **CABLE VOLTAGE RATING:** 300V
- **CABLE TEMPERATURE RATING:** 176°F [80°C]
- **CABLE CAPACITANCE:** 13.0pF/ft. [42.7pF/meter] nominal at 1MHz*
- **CROSSTALK:** 10-ft sample, 5ns rise time with 2 lines driven; near end 4.7%; far end 4.3% nominal*
- **PROPAGATION DELAY:** 1.5ns/ft. [4.9ns/meter] nominal*
- **INSULATION RESISTANCE:** 1010 Ω (10 ft. [3 meters] min.)

MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE:** 0.033 $\pm$ 0.002 [0.86 $\pm$ 0.05] dia.
* Applies to 0.050 [1.27] Pitch Cable Only

NUMBER OF CONDUCTORS

Available Sizes	Centers "C"	Dim. "D"
4 thru 20	0.300 [7.62]	0.395 [10.03]
22	0.400 [10.16]	0.495 [12.57]
24, 28, 40	0.600 [15.24]	0.695 [17.65]



ORDERING INFORMATION

XX-XXXX-XXX XXX

Optional Header Pin Plating
T = Sn
TL = Sn/Pb
TW = Twisted Pair Cable
ST = Stripped, Sn-dipped
(106-111 Series)

Jumper Series

Cable Length (inches)
2" = 002 (min.) [50.88]
2.5" = 002.5

No. of Conductors
(see Table)

SINGLE-END DIP JUMPER WIRE LIST

Series 106, 108, 110		Series 107, 109, 111	
Wire Number	Header Pin Number	Wire Number	Header Pin Number
1	1	1	1
2	8	2	2
3	2	3	3
4	7	4	4
5	3	5	5
6	6	6	6
7	4	7	7
8	5	8	8

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: $\pm$ 0.005 [0.13] UNLESS OTHERWISE SPECIFIED

FOR OTHER CONFIGURATIONS, SEE [DATA SHEET 11007](#)

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



ARIES
ELECTRONICS, INC.

2609 Bartram Road • Bristol, PA 19007-6810 USA
TEL 215-781-9956 • FAX 215-781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM




11006
Rev. 8.1
1 of 2




Series 100 thru 111 DIP Jumpers

Series 100




Numbers shown pin side, for reference only



Series 101




Series 106




WIRE 1

Series 107




WIRE 1

Series 108




WIRE 1

Series 109




WIRE 1

Series 110



WIRE 1

Series 111



WIRE 1

Cable Detail

(Series 107/109/111)




$$"Z" = (\text{NO. OF CONDUCTORS} - 1) \times .039 [.99]$$

$$"A" = (\text{No. of Conductors} \times 0.050 [1.27]) + 0.095 [2.41]$$

$$"B" = (\text{No. of Conductors} - 1) \times 0.050 [1.27]$$



$$"L" \pm 0.125$$

Header Detail
(Series 100, 101)


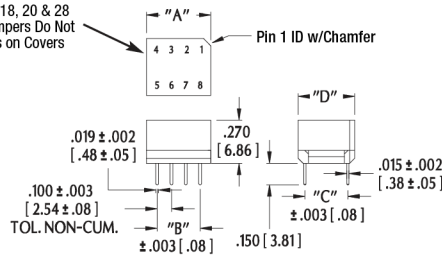


NOTE: 10, 12, 18, 20 & 28 Conductor Jumpers Do Not Have Numbers on Covers



Series 102





Series 103




Series 104



Series 105



Cable Detail

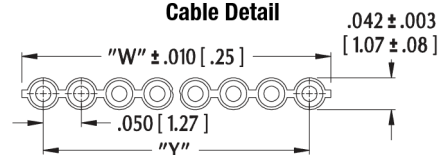

$$"W" = (\text{NO. OF CONDUCTORS} \times 0.050 [1.27]) + .005 [.08]$$

$$"Y" = (\text{NO. OF CONDUCTORS} - 1) \times 0.050 [1.27]$$

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: $\pm 0.005 [0.13]$ UNLESS OTHERWISE SPECIFIED

FOR OTHER CONFIGURATIONS, SEE [DATA SHEET 11007](#)

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



ARIES
ELECTRONICS, INC.

2609 Bartram Road • Bristol, PA 19007-6810 USA

TEL 215-781-9956 • FAX 215-781-9845

WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



11006
Rev. 8.1
2 of 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aries Electronics:

[16-012-106F](#) [16-012-102F](#) [16-012-108F](#) [16-012-100F](#) [16-012-104F](#) [16-012-105F](#) [16-012-101F](#) [16-012-103F](#) [14-024-110F](#) [14-036-110F](#) [14-036-102F](#) [14-036-106F](#) [14-036-104F](#) [14-036-100F](#) [14-036-108F](#) [14-036-101F](#) [14-036-105F](#) [14-036-103F](#) [16-036-104F](#) [14-048-100FT](#) [16-036-108F](#) [16-036-100F](#) [16-036-106F](#) [16-036-102F](#) [16-036-103F](#) [16-036-105F](#) [16-036-101F](#) [14-012-101F](#) [14-012-105F](#) [14-012-103F](#) [14-012-104F](#) [14-012-100F](#) [14-012-108F](#) [14-012-106F](#) [14-012-102F](#) [08-036-110F](#) [16-036-110F](#) [08-036-102F](#) [08-036-106F](#) [08-036-104F](#) [08-036-100F](#) [08-036-108F](#) [08-036-101F](#) [08-036-105F](#) [08-036-103F](#) [08-006-103F](#) [14-012-110F](#) [14-002-174-PHT](#) [14-024-103F](#) [14-024-101F](#) [14-024-105F](#) [14-024-102F](#) [14-024-106F](#) [14-024-104F](#) [14-024-108F](#) [14-024-100F](#) [08-012-106F](#) [08-012-102F](#) [08-002-103F](#) [08-012-103F](#) [08-012-105F](#) [08-012-101F](#) [08-012-110F](#) [08-024-110F](#) [16-024-101F](#) [16-024-105F](#) [16-024-103F](#) [16-024-104F](#) [16-024-100F](#) [16-024-108F](#) [16-024-106F](#) [16-024-102F](#) [08-024-103F](#) [08-024-101F](#) [08-024-105F](#) [08-024-102F](#) [08-024-106F](#) [08-024-104F](#) [08-024-108F](#) [08-024-100F](#) [16-024-110F](#) [16-012-110F](#) [08-012-104F](#) [08-012-100F](#) [08-012-108F](#)