



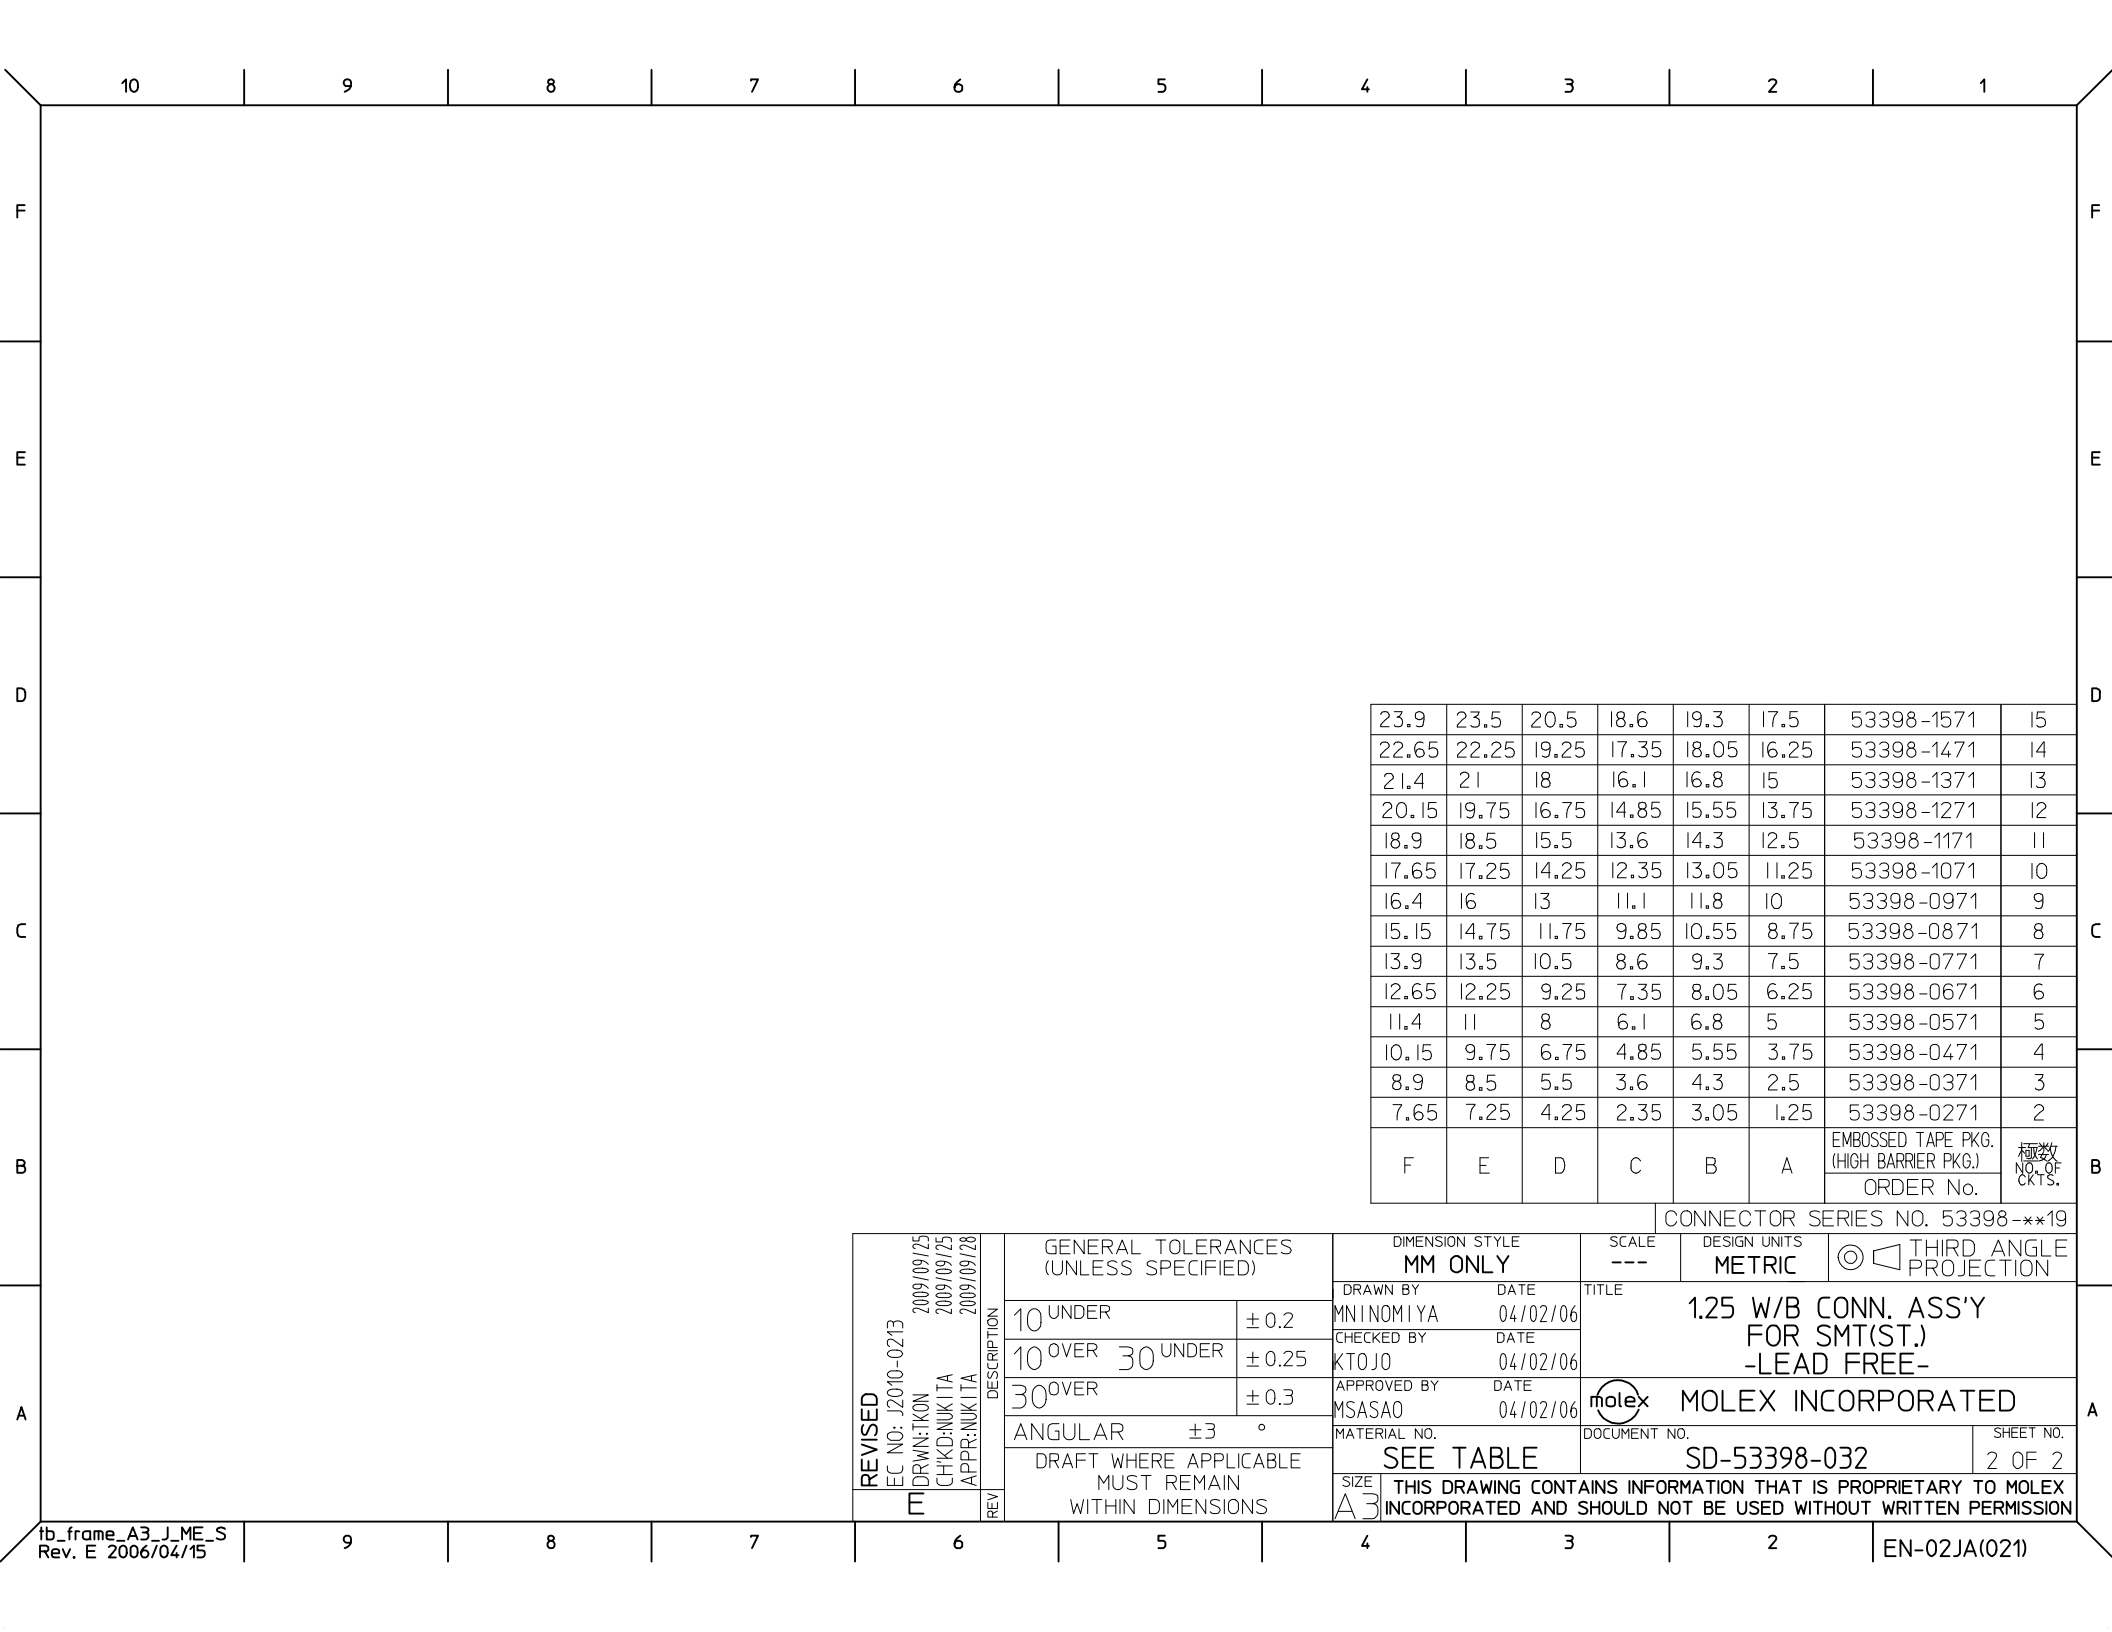


23.9	23.5	20.5	18.6	19.3	17.5	53398-1571	15
22.65	22.25	19.25	17.35	18.05	16.25	53398-1471	14
21.4	21	18	16.1	16.8	15	53398-1371	13
20.15	19.75	16.75	14.85	15.55	13.75	53398-1271	12
18.9	18.5	15.5	13.6	14.3	12.5	53398-1171	11
17.65	17.25	14.25	12.35	13.05	11.25	53398-1071	10
16.4	16	13	11.1	11.8	10	53398-0971	9
15.15	14.75	11.75	9.85	10.55	8.75	53398-0871	8
13.9	13.5	10.5	8.6	9.3	7.5	53398-0771	7
12.65	12.25	9.25	7.35	8.05	6.25	53398-0671	6
11.4	11	8	6.1	6.8	5	53398-0571	5
10.15	9.75	6.75	4.85	5.55	3.75	53398-0471	4
8.9	8.5	5.5	3.6	4.3	2.5	53398-0371	3
7.65	7.25	4.25	2.35	3.05	1.25	53398-0271	2
F	E	D	C	B	A	EMBOSSED TAPE PKG. (HIGH BARRIER PKG.)	種数 No. of C&Ts.
						ORDER No.	

REVISED	EC NO: J2010-0213	DRWN:TKGN CHKD:NUKITA APPR:NUKITA	2009/09/25 2009/09/25 2009/09/28	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
					10 UNDER	±0.2	DRAWN BY MNINOMIYA	DATE 04/02/06	TITLE 1.25 W/B CONN. ASS'Y FOR SMT(ST.) -LEAD FREE-			
					10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE 04/02/06				
					30 OVER	±0.3	APPROVED BY MSASAO	DATE 04/02/06	MOLEX INCORPORATED			
					ANGULAR	±3 °	MATERIAL NO.					DOCUMENT NO.
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-53398-032			2 OF 2
							SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

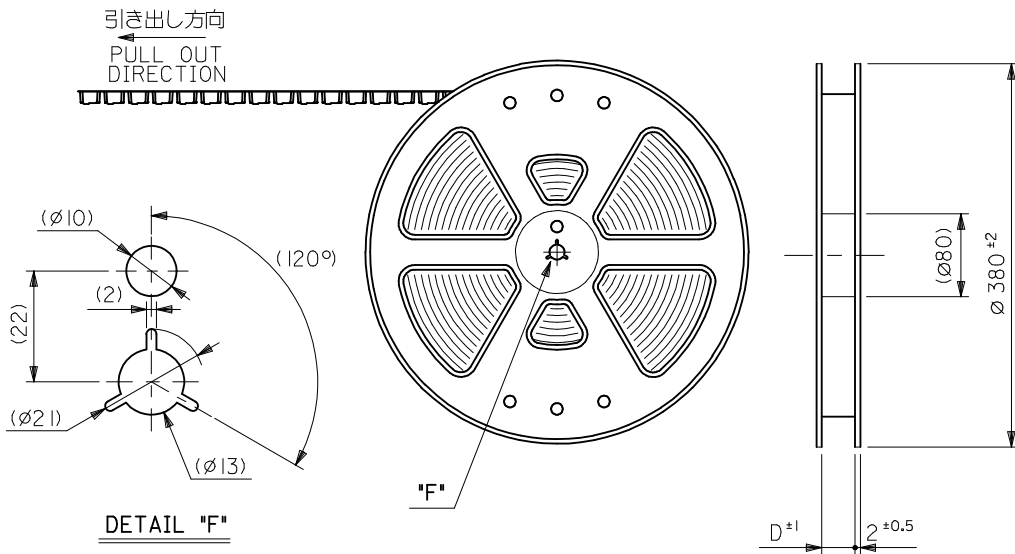


NOTES

1. 梱包数量: 1000個/リール
NUMBER OF CONNECTOR: 1000PCS/REEL
2. リードテープ長さ
LEAD TAPE LENGTH

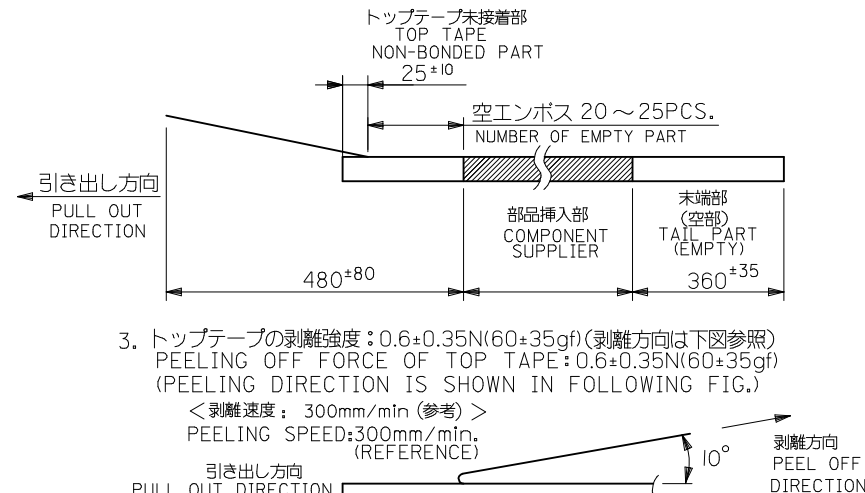

3. トップテープの剥離強度: 0.6 ± 0.35N(60 ± 35gf) (剥離方向は下図参照)
PEELING OFF FORCE OF TOP TAPE: 0.6 ± 0.35N(60 ± 35gf)
(PEELING DIRECTION IS SHOWN IN FOLLOWING FIG.)
剥離速度: 300mm/min (参考) >
PEELING SPEED: 300mm/min. (REFERENCE)
4. 53398-**-19 の詳細寸法については図面 SD-53398-032 を参照下さい。
RE DETAILED DIMENSIONS, SEE SD-53398-032.
5. 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE): ポリプロピレン (POLYPROPYLENE)
トップテープ (TOP TAPE): PET, PE, PEF
リール (REEL): ポリスチレン (P.S.) <リサイクル材含む>
POLYSTYRENE (P.S.) <RECYCLE MATERIAL CONTAINED>
6. 本製品は 53398-**-90 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 53398-**-90.
7. 本製品は乾燥剤入り、ハイバリア梱包仕様である。
THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

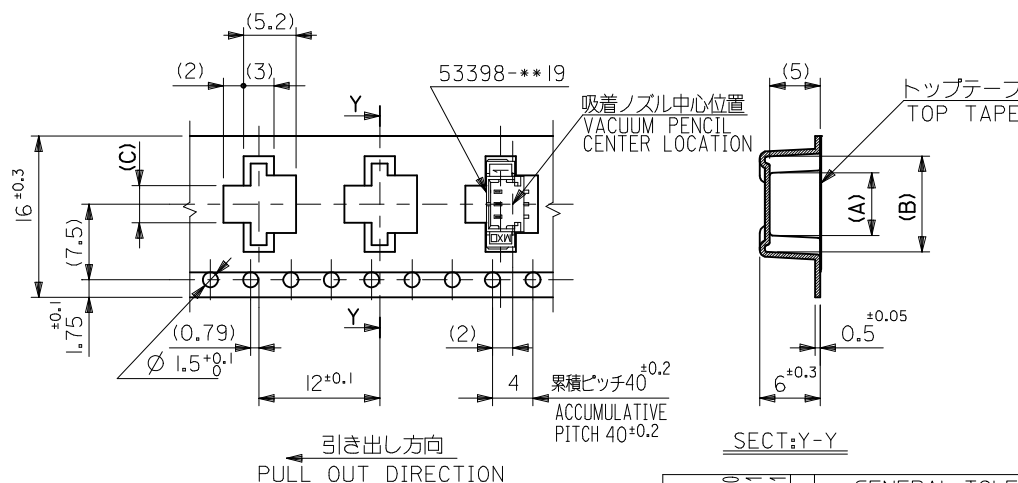

16幅テープ
(TAPE WIDTH: 16)

16	21.4	17.4	3.7	9.5	5.8	53398-0371	3
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	2.45	8.25	4.55	53398-0271	2
			(C)	(B)	(A)	MATERIAL NO.	極数 CKT.

REVISED EC NO.: J2009-2060 DRAWN: IKON CHKD: MATSUMOTO APPR: NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY NINOMIYA	DATE '04/02/06	TITLE 1.25 W/B CONN WAFER ASSY FOR SMT. EMBSTP. PKG. -LEAD FREE-	MOLEX MOLEX INCORPORATED	SHEET NO. 1 OF 3	
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	DATE '04/02/06				
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE '04/02/06				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE & SHEET 2.3		SD-53398-033				
REV				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F


E

D

C


B

A

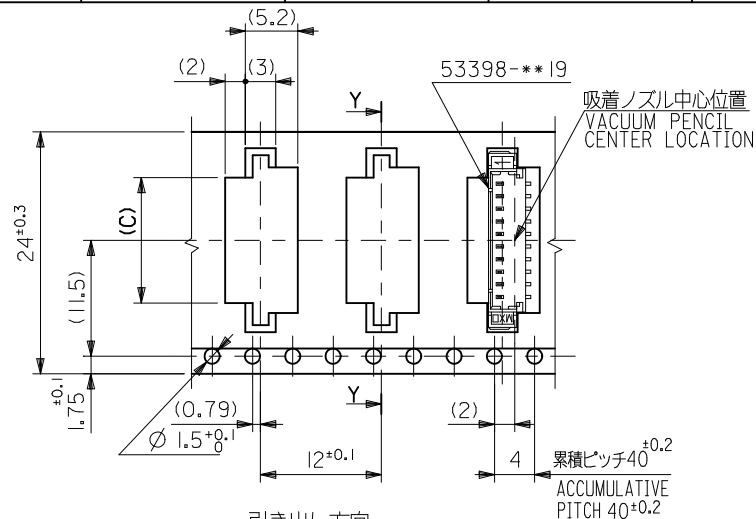


引き出し方向
PULL OUT DIRECTION

24幅テープ
(TAPE WIDTH:24)

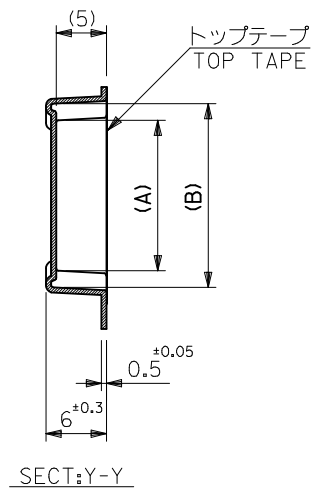


SECT:Y-Y

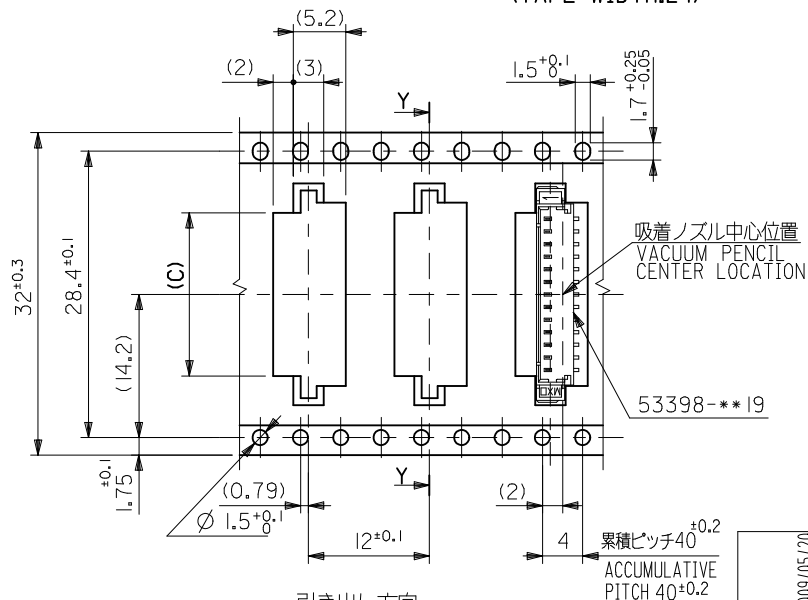

引き出し方向
PULL OUT DIRECTION

32幅テープ
(TAPE WIDTH:32)

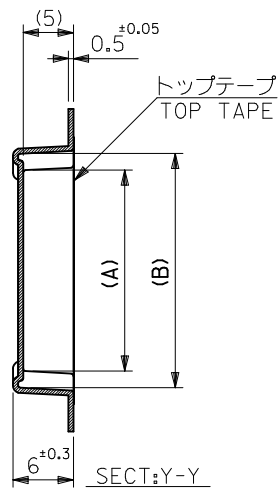

SECT:Y-Y

32	37.4	33.4	16.2	22	18.3	53398-1371	13
			14.95	20.75	17.05	▲ -1271	12
			13.7	19.5	15.8	▲ -1171	11
24	29.4	25.4	12.45	18.25	14.55	▲ -1071	10
			11.2	17	13.3	▲ -0971	9
			9.95	15.75	12.05	▲ -0871	8
			8.7	14.5	10.8	▲ -0771	7
			7.45	13.25	9.55	▲ -0671	6
			6.2	12	8.3	▼ -0571	5
			4.95	10.75	7.05	53398-0471	4
			キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)

REVISED EC NO: J2009-2060 DRWN:TKON CHKD:HMATSUMOTO APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY NINOMIYA	DATE '04/02/06	TITLE 1.25 W/B CONN WAFER ASSY FOR SMT. EMBSTP. PKG. -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	DATE '04/02/06					
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE '04/02/06	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	B	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE & SHEET 1.3		SD-53398-033		2 OF 3	
			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

F



E

D

C

B

A

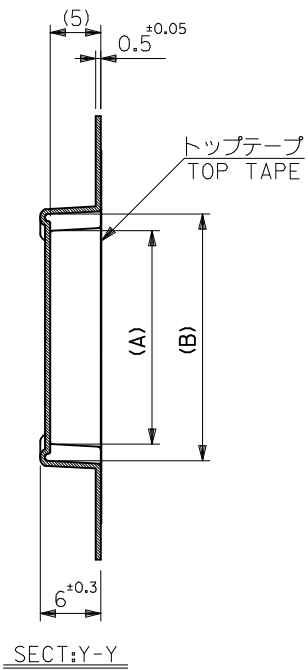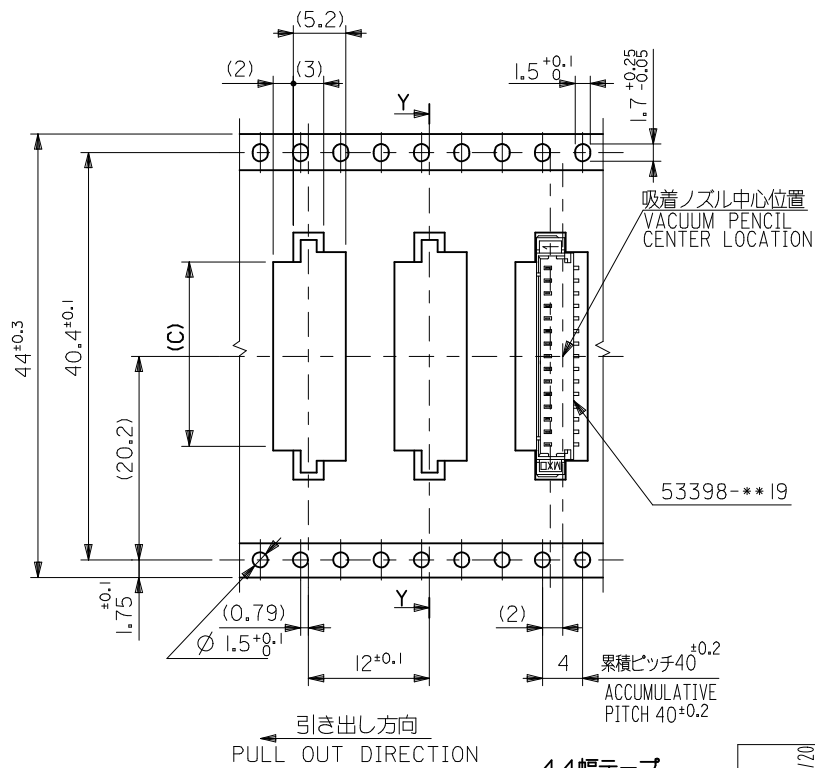

44		49.4	45.4	18.7 17.45	24.5 23.25	20.8 19.55	53398-1571 53398-1471	15 14
キャリアテープ幅 CARRIER TAPE WIDTH		E	D	(C)	(B)	(A)	MATERIAL NO.	極数 CKT.
DIMENSION STYLE MM ONLY				SCALE ---	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
DRAWN BY NINOMIYA		DATE '04/02/06		TITLE 1.25 W/B CONN WAFER ASSY FOR SMT. EMBSTP. PKG. -LEAD FREE-				
CHECKED BY K. TOJO		DATE '04/02/06						
APPROVED BY M. SASAO		DATE '04/02/06						
MATERIAL NO.				DOCUMENT NO.		SHEET NO.		
SEE TABLE & SHEET 12				SD-53398-033				3 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								