

DC to AC Inverters

Conformity to RoHS Directive

On-board type, Non-dimming, 8.4W, for 1 and 2 Bulbs

CXA Series CXA-M14L-P

FEATURES

- The CXA-M14L-P inverter for 2-cold cathode fluorescent lamps supports a wide range of CCFL devices and is characterized by highly stable output current.
- Employing a resonance-type push-pull circuit, this inverter delivers sine wave output with very low noise levels.
- Through the use of four different connection methods and combinations of 1 and 2 lamps, different output currents can be selected.
- Compact, lightweight printed circuit board design.
- High efficiency (typically 80%).
- Safe design that includes a built-in overcurrent protection element.
- It is a product conforming to RoHS directive.


APPLICATIONS

Industrial and other equipment employing LCD panels, products employing small lamps, information terminal devices

TEMPERATURE AND HUMIDITY RANGES

Temperature range (°C)	Operating	-10 to +60
	Storage	-20 to +85
Humidity range(%)RH		95max.
		[Maximum wet-bulb temperature 38°C]

SHAPES AND DIMENSIONS

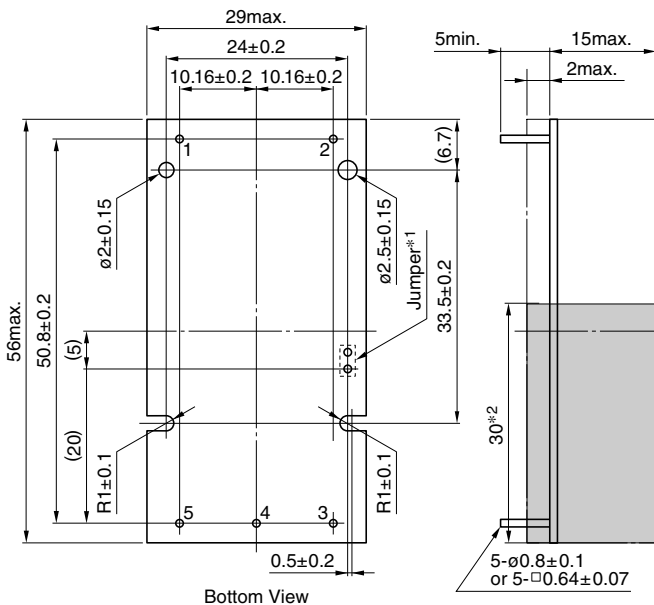

*1 Terminal numbers 2 and 5 are connected by the jumper.
Cut this jumper to let the secondary side float with respect to the primary side.


Weight: 21g typ.

*2 : High-voltage generator (The entire surface within a range of 30mm away from the end of the base in the output)


Dimensions in mm

CIRCUIT DIAGRAMS


CONNECTION A

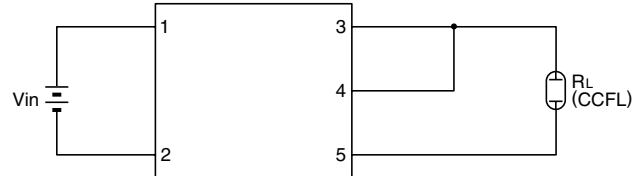


CONNECTION B

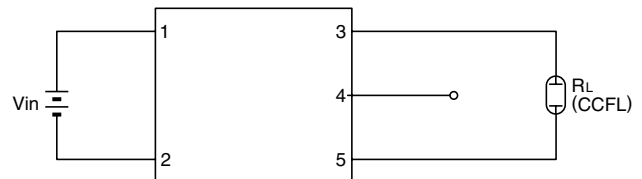

CONNECTION C

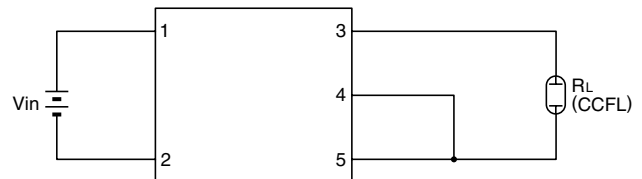

CONNECTION D

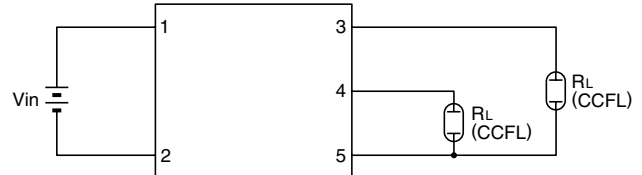

TERMINAL NUMBERS AND FUNCTIONS

Terminal No.	Functions	Symbol
1	Input voltage E _{dc}	V _{in}
2		GND
3	Output 1 [High voltage] I _{rms}	V _{HIGH1}
4	Output 2 [High voltage] I _{rms}	V _{HIGH2}
5	Output[Low voltage]	V _{LOW}

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

CXA-M14L-P

ELECTRICAL CHARACTERISTICS

12V INPUT TYPE/CXA-M14L-P

Connections	Items	Unit	Symbol	Specifications			Conditions		
				min.	typ.	max.	Vin(V)	Ta(°C)	RL(kΩ)
A	Output current Irms	mA	Iout	12.6	14	15.4	12±1%	23±5	28.5
				11.2	14	16.8	12±5%	-10 to +60	21.5 to 35.5
	Input current Idc	A	Iin	—	0.57	0.86	12±5%	-10 to +60	21.5 to 35.5
	Oscillation frequency	kHz	FL	23	28	33	12±5%	-10 to +60	21.5 to 35.5
	Open circuit output voltage Erms	V	Vopen	1300	1500	—	12±5%	-10 to +60	∞
B	Output power	W	Pout	—	—	8.4	12±5%	-10 to +60	—
	Output current Irms	mA	Iout	7	8	9	12±1%	23±5	50
				6.2	8	9.8	12±5%	-10 to +60	37.5 to 62.5
	Input current Idc	A	Iin	—	0.36	0.54	12±5%	-10 to +60	37.5 to 62.5
	Oscillation frequency	kHz	FL	27	32	37	12±5%	-10 to +60	37.5 to 62.5
C	Open circuit output voltage Erms	V	Vopen	1300	1500	—	12±5%	-10 to +60	∞
	Output power	W	Pout	—	—	4.8	12±5%	-10 to +60	—
	Output current Irms	mA	Iout	6.1	7	7.9	12±1%	23±5	57
				5.4	7	8.6	12±5%	-10 to +60	43 to 71
	Input current Idc	A	Iin	—	0.33	0.5	12±5%	-10 to +60	43 to 71
D	Oscillation frequency	kHz	FL	23	28	33	12±5%	-10 to +60	43 to 71
	Open circuit output voltage Erms	V	Vopen	1300	1500	—	12±5%	-10 to +60	∞
	Output power	W	Pout	—	—	4.2	12±5%	-10 to +60	—
	Output current Irms	mA	Iout1	6.3	7	7.7	12±1%	23±5	57
			Iout2	6.3	7	7.7	12±1%	23±5	57
			Iout1	5.6	7	8.4	12±5%	-10 to +60	43 to 71
			Iout2	5.6	7	8.4	12±5%	-10 to +60	43 to 71
	Input current Idc	A	Iin	—	0.57	0.86	12±5%	-10 to +60	43 to 71
	Oscillation frequency	kHz	FL	23	28	33	12±5%	-10 to +60	43 to 71
	Open circuit output voltage Erms	V	Vopen	1300	1500	—	12±5%	-10 to +60	∞
	Output power	W	Pout	—	—	4.2×2	12±5%	-10 to +60	—

