

MICRO SWITCH

FREEPORT, ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
YZLN-RH3G

YZLN-RH3G

M

DRAWING
NUMBER

3

2

ISSUE

RELEASE NO. PR-11708-T REPLACES

CHECK

REVISIONS

A PR-11708

KAG
18 NOV 82

B CO-81715

JAK
26 SEP 95

CHECK

19 NOV 82

CHECK

3 FEB 83

CHECK

18 NOV 82



CHECK

18 NOV 82

CHECK

18 NOV 82

CHECK

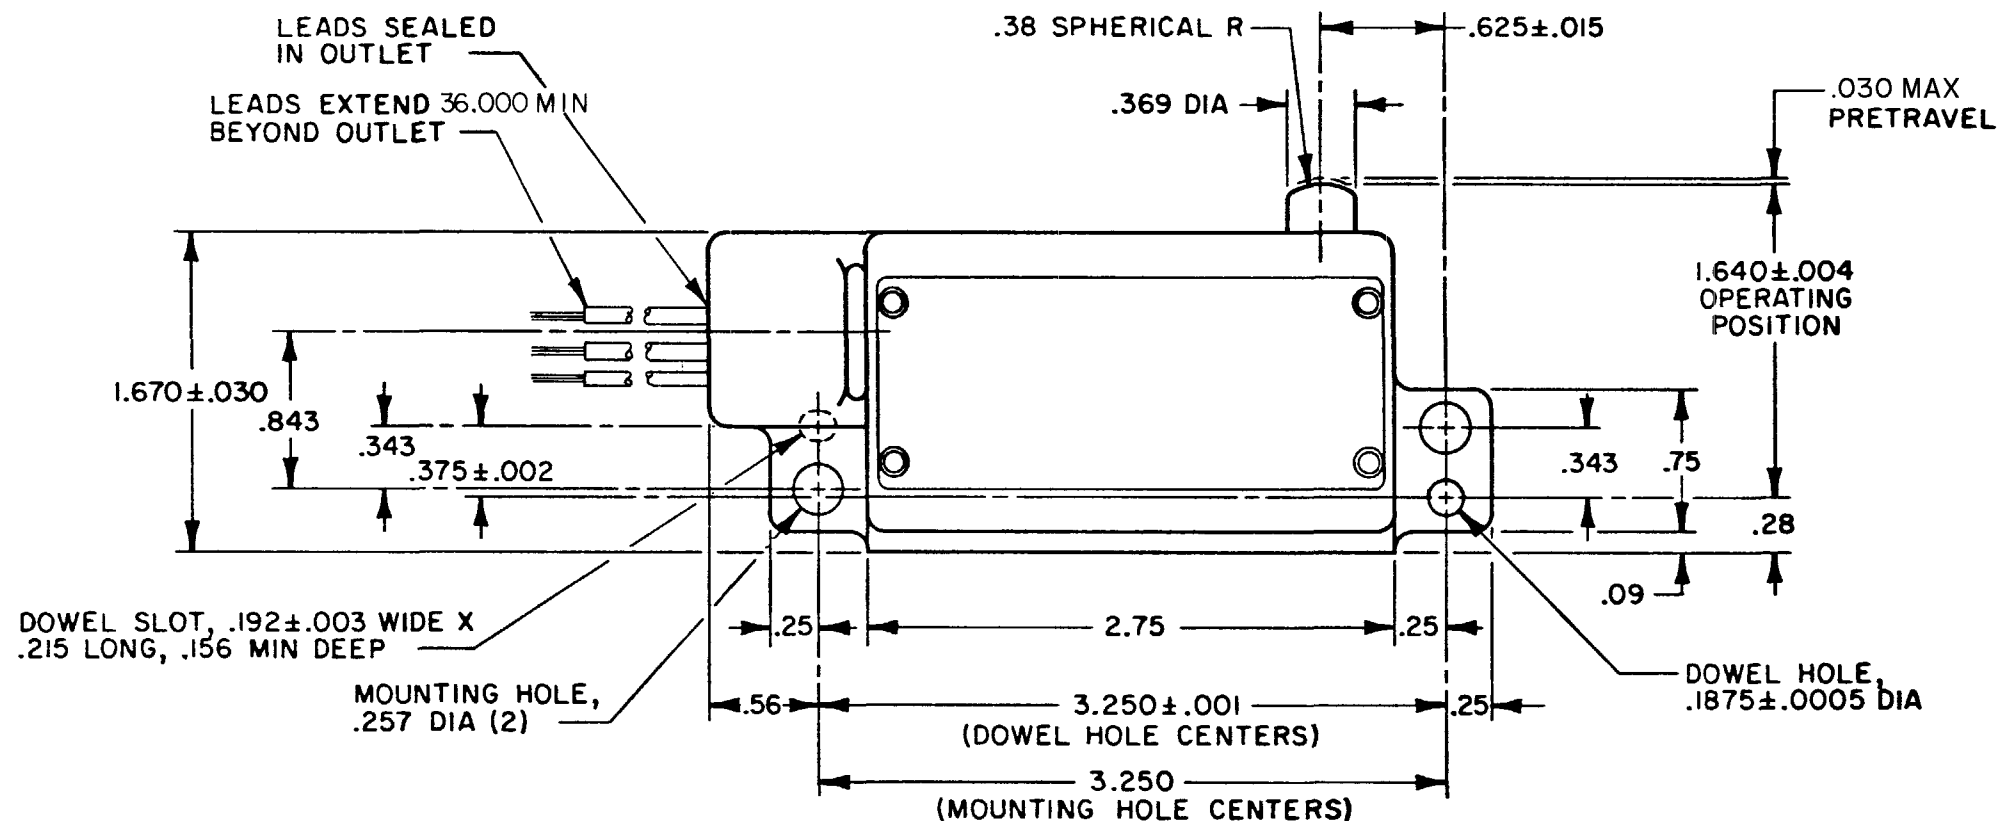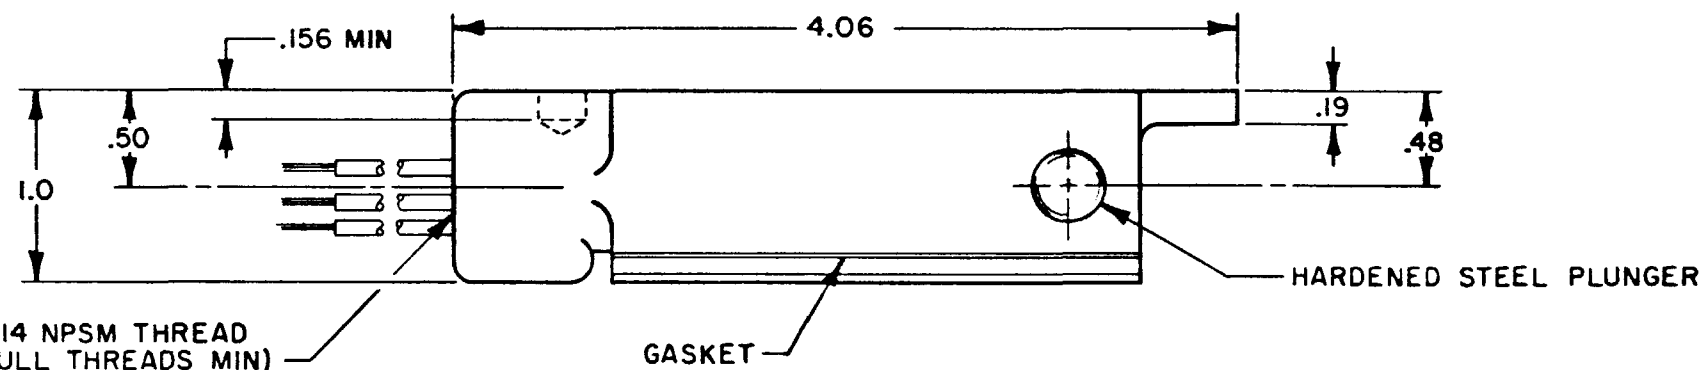

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 5 LB MAX

RELEASE FORCE ----- 1 LB MIN

DIFFERENTIAL TRAVEL ----- .004 MAX

OVERTRAVEL ----- .203 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P N O

CODE L96 15A-125, 250 OR 480 VAC
1/8 HP-125 VAC; 1/4 HP-250 VAC
1/2 A-125 VDC; 1/4 A-250 VDC



SCALE FULL


DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE:

DESIGN	TOL.	DESIGN	TOL.
NO PLACES	mm/in	mm/in	mm/in
ONE PLACE	0.1/0.01	ONE PLACE	0.01/0.001
TWO PLACES	0.01/0.001	TWO PLACES	0.001/0.0001
THREE PLACES	0.001/0.0001	THREE PLACES	0.0001/0.00001

DESIGN UNITS ☐ METRIC ☒ US CUSTOMARY

THIRD ANGLE PROJECTION



WEIGHT .720 LB PLUS LEADS

WIRING CONNECTIONS

COMMON - BLACK LEAD
NORMALLY OPEN - BLUE LEAD
GROUND - GREEN LEAD