

Using theTPS51200 EVM Sink/Source DDR Termination Regulator

Contents

1	Introduction	2
2	Description	2
3	Electrical Performance Specifications	3
4	Test Setup	6
5	Test Procedure	9
6	Performance Data and Typical Characteristic Curves.....	14
7	EVM Assembly	15
8	List of Materials.....	18
9	References	18

List of Figures

1	EVM Schematic	4
2	EVM Schematic	5
3	Recommended Test Setup	7
4	Control Loop Measurement Setup	13
5	DDR3 VTT Sink/Source Load Regulation	14
6	DDR3 VTTREF Sink/Source Load Regulation	14
7	VTT Source 1 A, Enable Start Up.....	14
8	VTT Source 1 A, Enable Shutdown.....	14
9	DDR3 VTT Sink/Source Transient	15
10	Bode Plot for DDR3 Application	15
11	Bottom Side Silkscreen (Top View)	15
12	Bottom Side Assembly.....	16
13	Bottom Side Copper	16
14	Top Side Copper	17

List of Tables

1	TPS51120 Performance Specification Summary	3
2	I/O and Jumper Connections.....	6
3	Test Points.....	8
4	List of Materials.....	18

1 Introduction

The TPS51200EVM evaluation board, HPA322A is designed to evaluate the performance and characteristics of TI's cost optimized DDR/DDR2/DDR3/LP DDR3 VTT termination regulator, the TPS51200.

1.1 Background

The TPS51200 is designed to provide proper termination voltage and a 10-mA buffered reference voltage for DDR memory which covered DDR (2.5 V/1.25 V), DDR2 (1.8 V/0.9 V), DDR3 (1.5 V/0.75 V), LP DDR3 (1.2 V/0.6 V) specifications with a minimum of external components.

2 Description

The TPS51200 is designed to provide proper termination voltage and a 10-mA buffered reference voltage for DDR memory which covered DDR (2.5 V/1.25 V), DDR2 (1.8 V/0.9 V), DDR3 (1.5 V/0.75 V), LP DDR3 (1.2 V/0.6 V) specifications with minimal external components

2.1 Typical Applications

- Memory Termination Regulator for DDR, DDR2, DDR3, LP DDR3
- Notebook/Desktop/Server
- Telecom/Datacom, GSM Base Station, LCD-TV/PDP-TV, Copier/Printer Set-Top Box

2.2 Features

- Input Voltage: Support 2.5V Rail and 3.3V Rail
- VLDOIN, VDDQ Voltage Range: 1.2V-2.5V
- Build-in transient load switches (with both sinking and sourcing capability) to emulate the sink/source transient behavior which helps to evaluate the dynamic performance. For ease of use, both load step and timing of transient can be modified by on board resistors, and current information can also be monitored on board
 - DDR: ± 1.67 A Sink/Source Transient Load
 - DDR2: ± 1.2 A Sink/Source Transient Load
 - DDR3: ± 1.0 A Sink/Source Transient Load
 - LP DDR3: ± 0.8 A Sink/Source Transient Load
- Switcher S1 for enable function
- Convenient test points for probing PGOOD, CLK_IN and loop response testing
- 2-layer PCB with all the components on the bottom side

3 Electrical Performance Specifications

3.1 Performance Specification Summary

Table 1. TPS51120 Performance Specification Summary

SPECIFICATION	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage range, (V _{VIN})		2.4	3.3	3.5	V
VDDQ voltage range (V _{VDDQ})		1.2		2.5	
VLDOIN Voltage range (V _{VLDOIN})		1.2		2.5	
VTT TERMINATION VOLTAGE					
DDR	VTT		1.25		V
	VTTREF		1.25		
DDR2	VTT		0.9		
	VTTREF		0.9		
DDR3	VTT		0.75		
	VTTREF		0.75		
LP DDR3	VTT		0.6		
	VTTREF		0.6		
VTT termination voltage tolerance		–25		25	mV
Termination current (I _{VTT})		–2		2	A
VTTREF voltage tolerance		–15		15	mV
Reference current (I _{VTTREF})		–10		10	mA
Sink current limit (I _{VTT})		3.5		5.5	A
Source current limit (I _{VTT})		3.0		4.5	

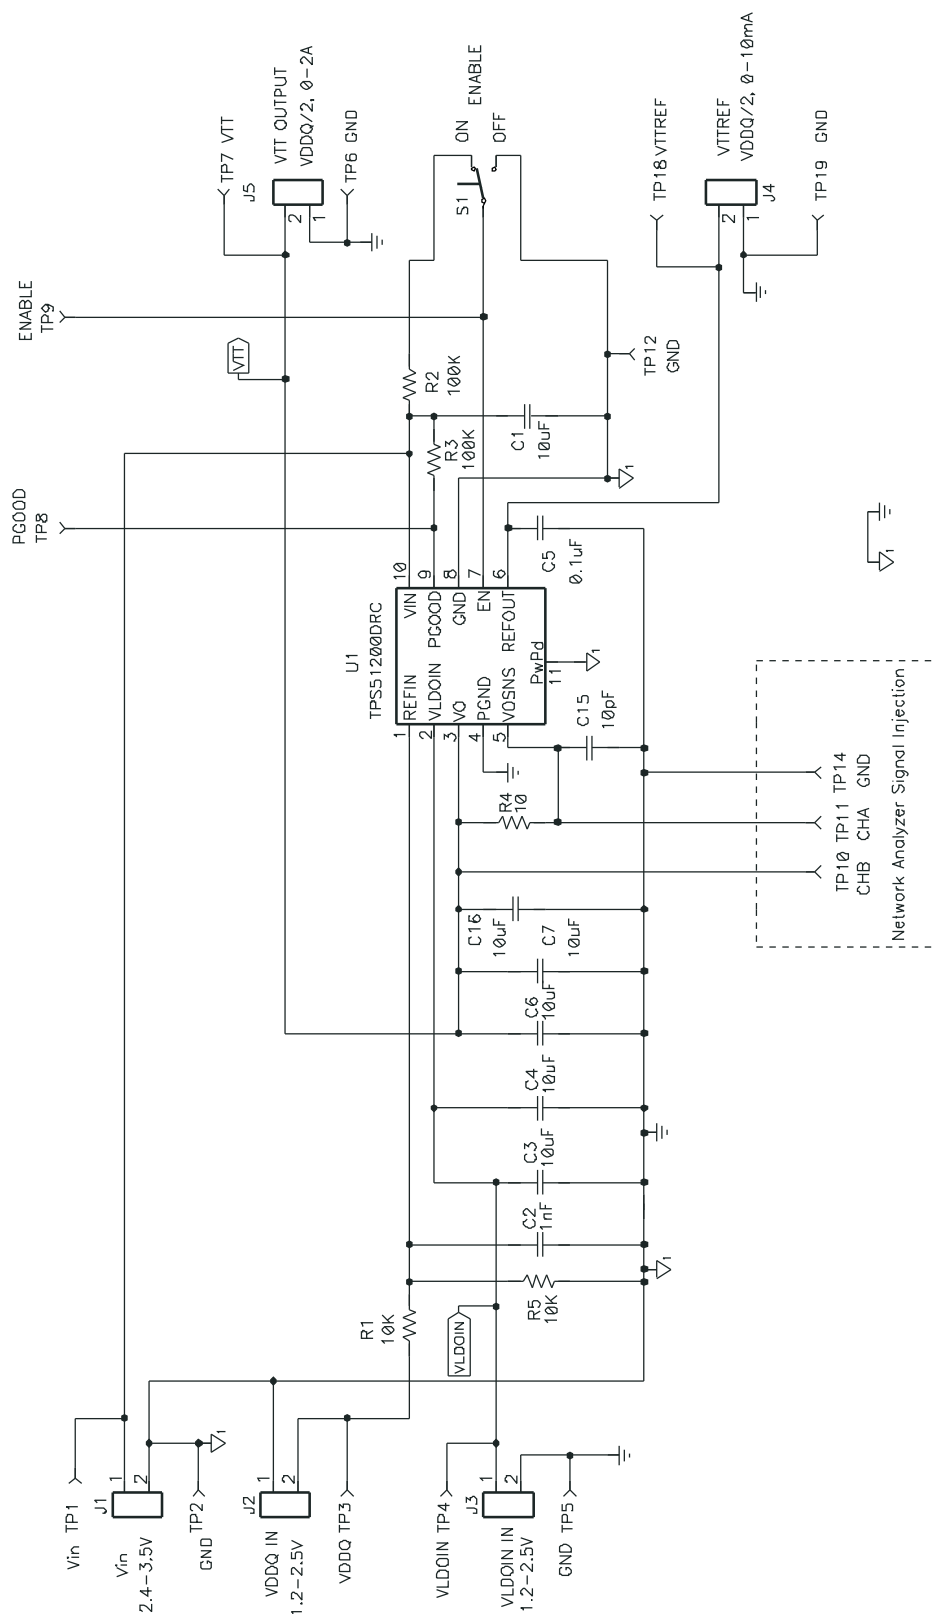


Figure 1. EVM Schematic

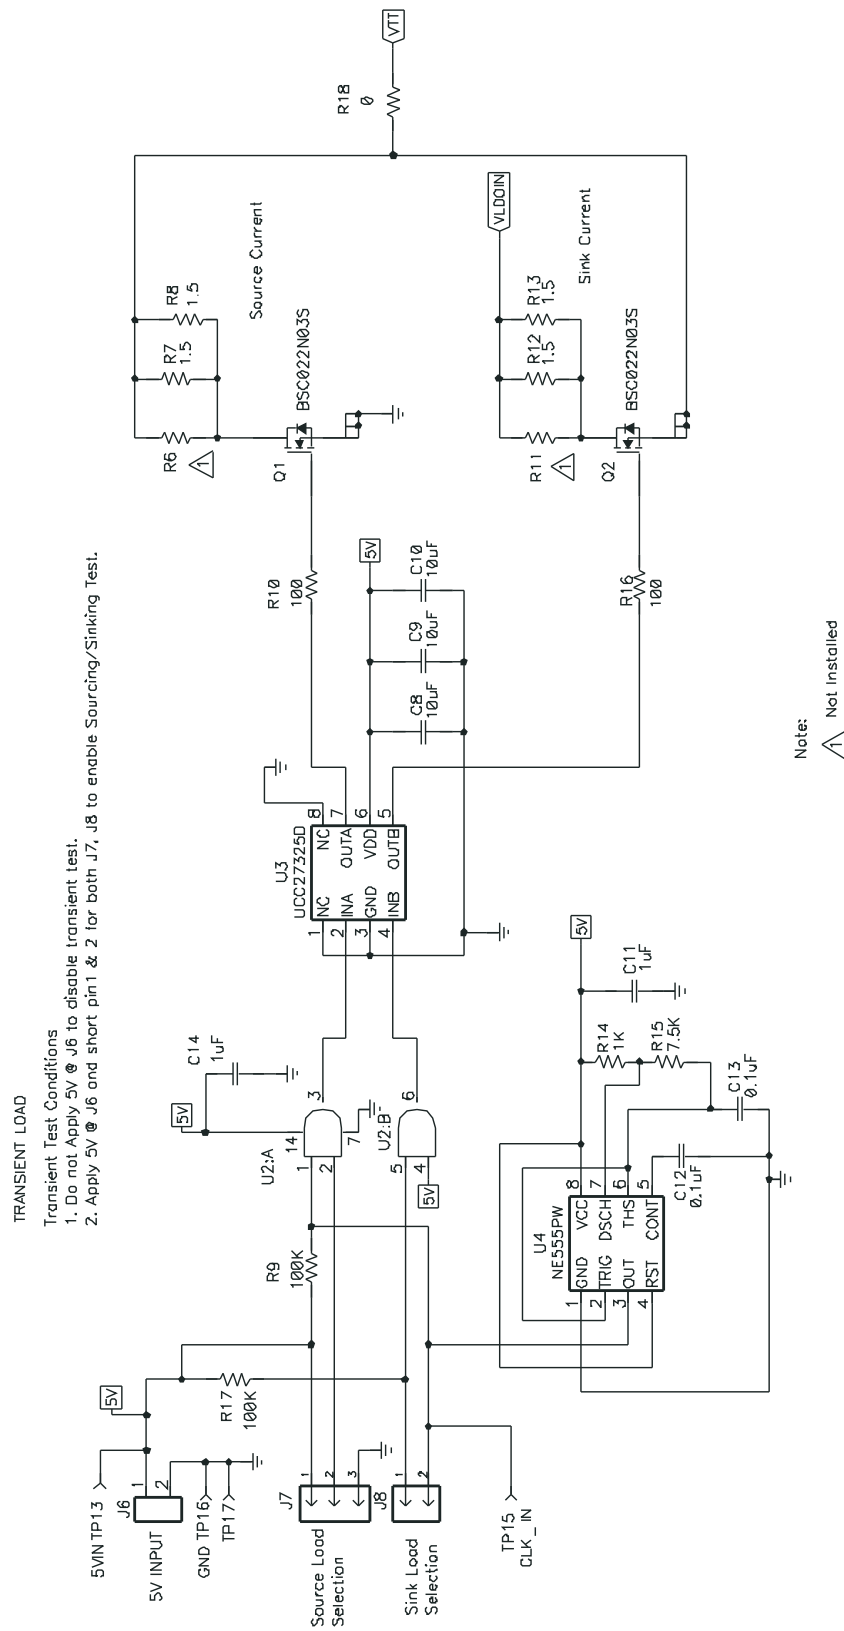


Figure 2. EVM Schematic

4 Test Setup

This section shows the test setups used and the tests performed in evaluating the EVM. See the TPS51120 data sheet ([SLUS670](#)) for complete details regarding the operation and specifications.

4.1 Equipment

4.1.1 Voltage Source

Table 2. I/O and Jumper Connections

JACK	CONNECTION
VIN	The input voltage source 1 should be a 0 V to 10 V variable DC source capable of supplying 1A dc. Connect Vin to J1 as shown in Figure 3 .
VDDQ	The input voltage source 2 should be a 0 V to 10 V variable DC source capable of supplying 1A dc. Connect VDDQ to J2 as shown in Figure 3 .
VLDOIN	The input voltage source 3 should be a 0 V to 10 V variable DC source capable of supplying 10A dc. Connect VLDOIN to J3 as shown in Figure 3 .
5VINPUT	The input voltage source 4 should be a 0-10V variable DC source capable of supplying 1A dc. Connect 5VINPUT to J6 as shown in Figure 3 .

4.1.2 Voltmeters

Voltmeters (0V-10 V) are used to monitor the V_{IN} voltage (V1), VDDQ input voltage (V2), VLDOIN input voltage (V3), VTT output voltage (V4), VTTREF output voltage (V5), 5VIN input (V6) as shown in [Figure 3](#)

4.1.3 Loads

Load 1 is an electronic load set in constant current mode capable of sinking 0 A to 5 A of current. Load 1 needs to be connected to J5 as shown in [Figure 3](#). Load 2 is recommended to use resistive load around 0.5 W. VTTREF only sink/source maximum 10 mA. Load 2 needs to be connected to J4 as shown in [Figure 3](#).

4.1.4 Oscilloscope

An analog or digital oscilloscope can be used to monitor various test points around the EVM. It also can be used to measure VTT transient load regulation.

4.1.5 Fan

Some of the components in this EVM can get hot to approach temperatures of 60°C during operating. A small fan capable of between 200 LFM and 400 LFM is recommended to reduce component temperatures while the EVM is operating.

4.2 Recommended Test Setup

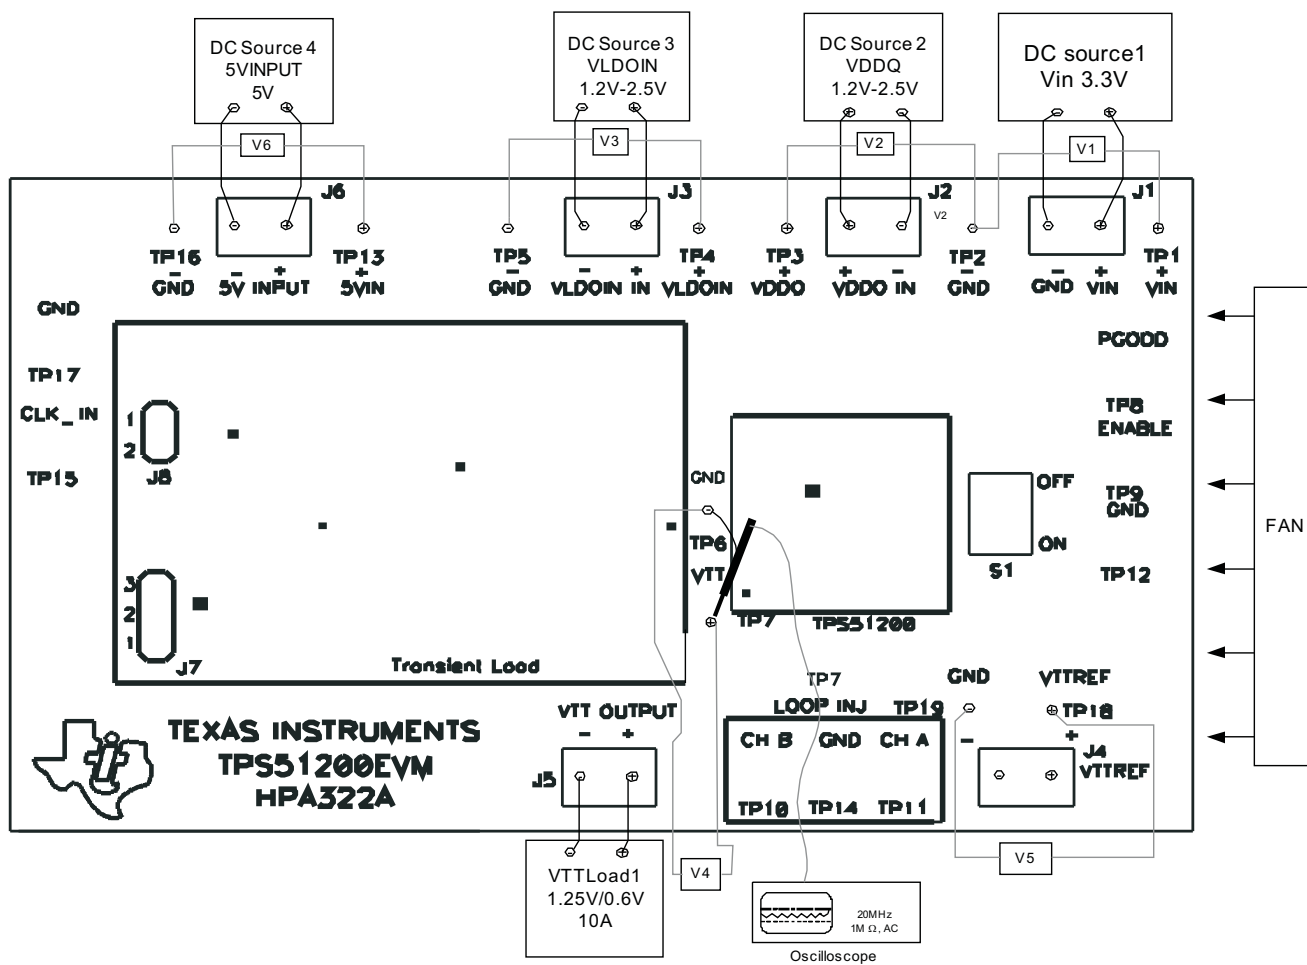


Figure 3. Recommended Test Setup

4.3 List of Test Points

Table 3 lists the functions of each test point.

Table 3. Test Points

TEST POINTS	NAME	DESCRIPTION
TP1	V _{IN} +	3.3V or 2.5V input
TP2	GND	GND for V _{IN} and VDDQ measurement
TP3	VDDQ	VDDQ input 1.2 V to 2.5 V
TP4	VLDOIN	VLDOIN input 1.2 V to 2.5 V
TP5	GND	GND for VLDOIN measurement
TP6	GND	GND for VTT measurement
TP7	VTT	VTT output
TP8	PGOOD	Monitors power good signal
TP9	ENABLE	Monitors enable signal
TP10	CHB	Input B for loop analysis, See section 6.5
TP11	CHA	Input A for loop analysis, See section 6.5
TP12	GND	GND for PGOOD and ENABLE measurement
TP13	5VIN	5-V input for transient load
TP14	GND	GND for loop measurement
TP15	CLK_IN	Monitor the load transient timing
TP16	GND	GND for 5VIN measurement
TP17	GND	GND for CLK_IN signal measurement
TP18	VTTREF	VTTREF output
TP19	GND	GND for VTTREF measurement

4.4 Note on Power Up and Power Down

The following steps are guidelines for power up and power down of the EVM. Never walk away from a powered EVM.

4.4.1 Workstation

An ESD workstation is recommended. Make sure that an ionizer is on. Any wrist straps, boot straps or mats must connect the user to earth ground before the EVM is removed from the protective packaging and power is applied to it. Electrostatic smock and safety glasses should also be worn.

4.4.2 Power Up

- Prior to connecting the DC input source, limit the source current and then connect the DC source to EVM as shown in [Figure 3](#)
 - Set DC source 1 source current limit to 1 A.
 - Set DC source 2 source current limit to 1 A.
 - Set DC source 3 source current limit to 10 A.
 - Set DC source 4 source current limit to 1 A.
- Connect voltage meter (V1, V2, V3, V4, V5, V6) as shown in [Figure 3](#).
- For operation with load, connect Load 1 and Load 2 to EVM as shown in [Figure 3](#).
 - Connect Load 1 to J5 and Load 2 to J4
 - Set electronic load to constant current mode with initial value of 0 A.
- Power on the DC source 1.
- Power on the DC source 2.
- Power on the DC source 3.

4.4.3 Power Down

Power off the DC sources and loads in the following order.

1. Power off DC Source 4.
2. Power off DC Source 3.
3. Power off DC Source 2.
4. Power off DC Source 1.
5. Power off Load 1.
6. Power off Load 2.

5 Test Procedure

5.1 DDR Operation

5.1.1 DDR Source Load Regulation

1. Set Switch S1 to the OFF position.
2. Ensure DC Source 4 is OFF.
3. Increase V_{IN} (DC Source 1) from 0 V to 3.3 V at J1. This is the bias supply required for TPS51200 operation. Using V1, verify V_{IN} voltage is between 3.25 V and 3.35 V.
4. Increase VDDQ (DC Source 2) from 0 V to 2.5 V at J2. This is the reference input. Using V2, verify that the VDDQ voltage is between 2.45 V and 2.55 V.
5. Increase VLDOIN (DC Source 3) from 0 V to 2.5 V at J3. This is the LDO input. Using V3, verify that the VLDOIN voltage is between 2.45 V and 2.55 V. Ensure that this input wires are short and heavy (gauge 14 and lower).
6. Set Switch S1 to the ON position.
7. Set Load 1 to between 0 A to 2 A, Load 2 to between 0 mA to 10 mA.
8. Verify V3 between 2.45 V and 2.55 V. Adjust VLDOIN if necessary.
9. Using V4 and V5 to measure VTT, VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (-). V5 uses for VTTREF at TP18 (+) and TP19 (-). VTT and VTTREF both should be around 1.25 V
10. Decrease Load 1 to 0 A.
11. Decrease Load 2 to 0 mA.
12. Set Switch S1 to the OFF position.
13. Continue on the test procedure [Section 5.1.2](#).

5.1.2 DDR Sink/Source Transient

Perform the following operations in the order shown.

1. Remove Load 1 from J5.
2. Ensure that the two jumpers provided in the EVM to short pin1 and pin2 are connected at location J7 and J8.
3. Increase DC Source 4 from 0 V to 5 V at J6. This is the bias supply required for transient load operation. Using V6, verify that the 5VINUT voltage is between 4.95 V and 5.05 V.
4. Set Switch S1 to the ON position.
5. TPS51200 is now operating at sink (1.67 A) and source (1.67 A) load transient.
6. Verify V3 between 2.45 V and 2.55 V, Adjust VLDOIN if necessary.
7. Using V4 and V5 to measure VTT, VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (-). V5 uses for VTTREF at TP18 (+) and TP19 (-). VTT and VTTREF each should measure approximately 1.25 V.
8. Use scope probe to monitor VTT load transient regulation. The scope probe should be put at TP7 (+) and TP6 (-) by setting to AC with 20 MHz bandwidth limiting. Use a vertical resolution of 20 mV per division and a horizontal resolution of 200 μ s per division. The measurement should ignore high frequency switch transition "spike". Refer to [Figure 3](#) and [Figure 9](#).

9. Set Switch S1 to the OFF position.
10. Decrease DC Source 4 to 0 V.
11. Decrease DC Source 3 to 0 V.
12. Decrease DC Source 2 to 0 V.
13. Decrease DC Source 1 to 0 V.

5.2 DDR2 Operation

5.2.1 DDR2 Source Load Regulation

1. Set Switch S1 to the OFF position.
2. Ensure DC Source 4 is OFF.
3. Increase V_{IN} (DC Source 1) from 0 V to 3.3 V at J1. This is the bias supply required for TPS51200 operation. Using V1, verify that V_{IN} measures between 3.25 V and 3.35 V.
4. Increase VDDQ (DC Source 2) from 0 V to 1.8 V at J2. This is the reference input. Using V2, verify that the VDDQ voltage is between 1.75 V and 1.85 V.
5. Increase VLDOIN (DC Source 3) from 0V to 1.8V at J3. This is the LDO input. Using V3, verify that the VLDOIN voltage is between 1.75V and 1.85V. Ensure that the input wires are short and heavy (gauge 14 and lower).
6. Set Switch S1 to the ON position.
7. Set Load 1 to between 0 A and 2 A. Set Load 2 to between 0 mA and 10 mA.
8. Verify that V3 is between 1.75 V and 1.85 V, Adjust VLDOIN if necessary.
9. Use V4 and V5 to measure VTT, and VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (-). V5 uses for VTTREF at TP18 (+) and TP19 (-). VTT and VTTREF both should be around 0.9 V.
10. Decrease Load 1 to 0 A,
11. Decrease Load 2 to 0 mA.
12. Set Switch S1 to the OFF position.
13. Continue on the test procedure [Section 5.2.2](#).

5.2.2 DDR2 Sink/Source Transient

1. Remove Load 1 from J5.
2. Ensure two jumpers provided in the EVM to short pin1and pin2 are connected at location J7 and J8.
3. Increase DC Source 4 from 0 V to 5 V at J6. This is the bias supply required for transient load operation. Using V6, verify that the 5VINPUT is between 4.95 V and 5.05 V.
4. Set Switch S1 to the ON position.
5. TPS51200 is now operating at sink (1.2 A) and source (1.2 A) load transient.
6. Verify V3 between 1.75 V and 1.85 V, Adjust VLDOIN if necessary.
7. Using V4 and V5 to measure VTT, VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (-). V5 uses for VTTREF at TP18 (+) and TP19 (-). VTT and VTTREF each should measure approximately 0.9 V.
8. Use scope probe to monitor VTT load transient regulation. The scope probe should be put at TP7 (+) and TP6 (-) by setting to AC with 20 MHz bandwidth limiting. Use a vertical resolution of 20 mV per division and a horizontal resolution of 200 μ s per division. Use horizontal cursor to measure transient load regulation. The measurement should ignore high frequency switch transition "spike". Refer to [Figure 3](#) and [Figure 9](#).
9. Set Switch S1 to the OFF position.
10. Decrease DC Source 4 to 0 V.
11. Decrease DC Source 3 to 0 V.
12. Decrease DC Source 2 to 0 V.
13. Decrease DC Source 1 to 0 V.

5.3 DDR3 Operation

5.3.1 DDR3 Source Load Regulation

1. Set Switch S1 to the OFF position.
2. Ensure DC Source 4 is OFF.
3. Increase V_{IN} (DC Source 1) from 0 V to 3.3 V at J1. This is the bias supply required for TPS51200 operation. Using V1, verify that V_{IN} is between 3.25 V and 3.35 V.
4. Increase VDDQ (DC Source 2) from 0 V to 1.5 V at J2. This is the reference input. Using V2, verify that the VDDQ voltage is between 1.45 V and 1.55V.
5. Increase VLDOIN (DC Source 3) from 0 V to 1.5 V at J3. This is the LDO input. Using V3, verify that the VLDOIN voltage is between 1.45 V and 1.55 V. Ensure that the input wires are short and heavy (gauge 14 and lower).
6. Set Switch S1 to the ON position.
7. Set Load 1 to between 0 A to 2 A Set Load 2 to between 0 mA and 10 mA.
8. Verify that V3 is between 1.45 V and 1.55 V. Adjust VLDOIN if necessary.
9. Use V4 and V5 to measure the VTT and VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (–). V5 uses for VTTREF at TP18 (+) and TP19 (–). VTT and VTTREF both should be approximately 0.75 V.
10. Decrease Load 1 to 0 A.
11. Decrease Load 2 to 0 mA.
12. Set Switch S1 to the OFF position.
13. Continue on the test procedure Section 5.3.2.

5.3.2 DDR3 Sink/Source Transient

1. Remove Load 1 from J5.
2. Ensure that the two jumpers provided in the EVM to short pin1and pin2 are connected at location J7 and J8.
3. Increase DC Source 4 from 0 V to 5 V at J6. This is the bias supply required for transient load operation. Using V6, verify that the 5VINPUT is between 4.95 V and 5.05 V.
4. Set Switch S1 to the ON position.
5. The TPS51200 is now operating at sink (1.0A) and source (1.0A) load transient.
6. Verify that V3 is between 1.45 V and 1.55 V. Adjust VLDOIN if necessary.
7. Use V4 and V5 to measure the VTT and VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (–). V5 uses for VTTREF at TP18 (+) and TP19 (–). VTT and VTTREF should each measure approximately 0.75 V.
8. Use a scope probe to monitor the VTT load transient regulation. The scope probe should be put at TP7 (+) and TP6(–) by setting to AC with 20 MHz bandwidth limiting. Use a vertical resolution of 20 mV per division and a horizontal resolution of 200 μ s per division. Use the horizontal cursor to measure transient load regulation. The measurement should ignore high-frequency switch transition spikes. Refer to [Figure 3](#) and the [Figure 9](#).
9. Set Switch S1 to the OFF position.
10. Decrease DC source 4 to 0 V.
11. Decrease DC source 3 to 0 V.
12. Decrease DC source 2 to 0 V.
13. Decrease DC source 1 to 0 V.

5.4 LP DDR3 Operation

5.4.1 LP DDR3 Source Load Regulation

1. Set Switch S1 to the OFF position.
2. Ensure that the DC Source 4 is OFF.
3. Increase V_{IN} (DC Source 1) from 0 V to 3.3 V at J1. This is the bias supply required for TPS51200 operation. Using V1, verify that the V_{IN} voltage is between 3.25 V and 3.35 V.
4. Increase VDDQ (DC Source 2) from 0 V to 1.2 V at J2. This is the reference input. Use V2 to verify that the VDDQ voltage is between 1.15 V and 1.25 V.
5. Increase VLDOIN (DC Source 3) from 0 V to 1.2 V at J3. This is the LDO input. Use V3 to verify that the VLDOIN voltage is between 1.15 V and 1.25 V. Ensure that the input wires are short and heavy (gauge 14 and lower).
6. Set Switch S1 to the ON.
7. Set Load 1 to between 0 A and 2 A. Increase Load 2 to between 0 mA and 10 mA.
8. Verify V3 is between 1.15 V and 1.25 V. Adjust VLDOIN if necessary.
9. Use V4 and V5 to measure the VTT and VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (–). V5 uses for VTTREF at TP18 (+) and TP19 (–). VTT and VTTREF should each measure approximately 0.6 V
10. Decrease Load 1 to 0 A.
11. Decrease Load 2 to 0 mA.
12. Set Switch S1 to the OFF position.
13. Continue on to test procedure [Section 5.4.2](#)

5.4.2 LP DDR3 Sink/Source Transient

1. Remove Load 1 from J5.
2. Ensure that the two jumpers provided in the EVM to short pin1 and pin2 are connected at location J7 and J8.
3. Increase DC Source 4 from 0 V to 5 V at J6. This is the bias supply required for transient load operation. Use V6 to verify that the 5VINPUT is between 4.95 V and 5.05 V.
4. Set Switch S1 to the ON position.
5. TPS51200 is now operating at sink (0.8 A) and source (0.8 A) load transient.
6. Verify that V3 is between 1.15 V and 1.25 V. Adjust VLDOIN if necessary.
7. Use V4 and V5 to measure the VTT and VTTREF voltage. V4 uses for VTT at TP7 (+) and TP6 (–). V5 uses for VTTREF at TP18 (+) and TP19 (–). VTT and VTTREF should each measure approximately 0.6 V.
8. Use a scope probe to monitor the VTT load transient regulation. The scope probe should be inserted at TP7 (+) and TP6(–) by setting to AC with 20 MHz bandwidth limiting. Use a vertical resolution of 20 mV per division and a horizontal resolution of 200 μ s per division . Use horizontal cursor to measure transient load regulation. The measurement should ignore high-frequency switch transition spikes. Refer to [Figure 3](#) and [Figure 9](#).
9. Set Switch S1 to the OFF position.
10. Decrease DC source 4 to 0 V.
11. Decrease DC source 3 to 0 V.
12. Decrease DC source 2 to 0 V.
13. Decrease DC source 1 to 0 V.

5.5 Loop Measurement (TP10, TP11 and TP14)

TPS51200EVM contains a 10- Ω series resistor in the feedback loop. The control loop measurement set up as shown in [Figure 4](#).


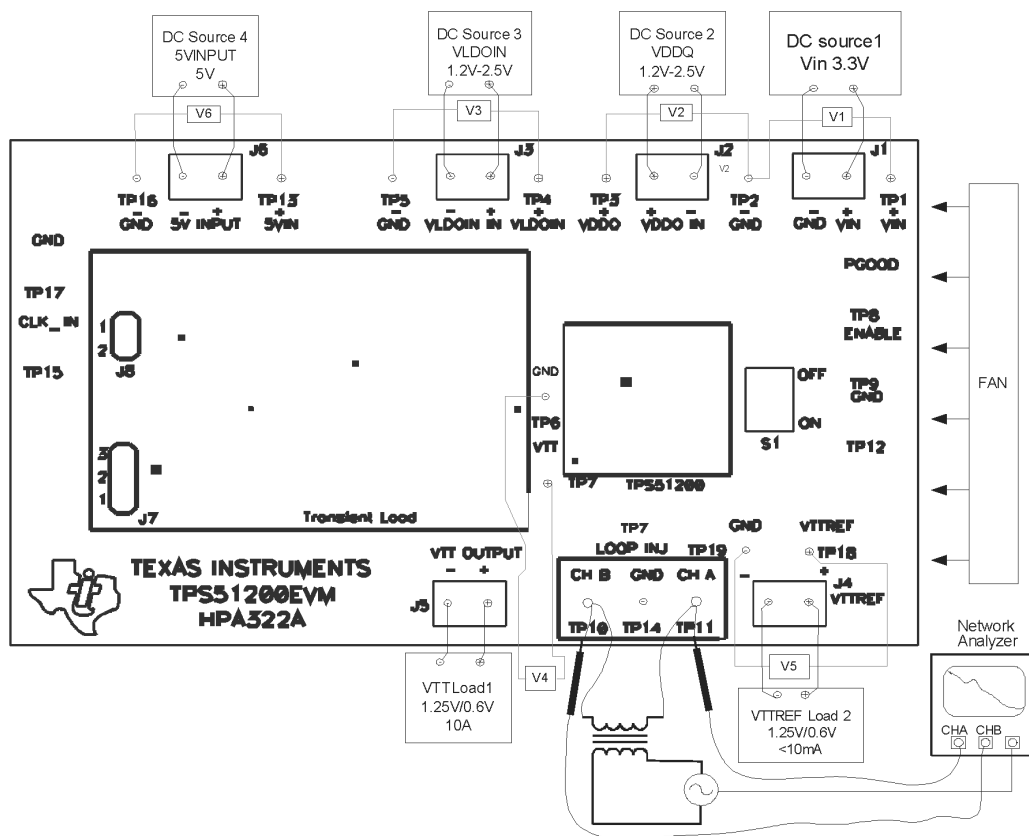


Figure 4. Control Loop Measurement Setup


5.5.1 Control Loop Measurement Process

1. Set up EVM as shown in [Figure 4](#).
2. Follow test procedure at Step 1 through Step 9 of 5.1.1(DDR), 5.2.1 (DDR2), 5.3.1 (DDR3) or 5.4.1 (LP DDR3) to select the desired application and load condition.
3. Connect Input Signal Amplitude Measurement Probe (Channel A) to TP11.
4. Connect Output Signal Amplitude Measurement Probe (Channel B) to TP10.
5. Connect Ground Lead of Channel A and Channel B to TP14.
6. Inject approximately 100 mV or less signal through an isolation transformer.
7. Sweep frequency from 1 kHz to 10 MHz with a 10-Hz or lower post filter.
8. Measure the control loop gain margin and phase margin. (Refer to Bode plot [Figure 10](#) in Section 6.)
9. Disconnect isolation transformer, probe Channel A and Channel B before making other measurements.
10. Decrease Load 1 to 0 A.
11. Decrease Load 2 to 0 mA.
12. Set switch S1 to the OFF position.
13. Decrease DC Source 3 to 0 V.
14. Decrease DC Source 2 to 0 V.
15. Decrease DC Source 1 to 0 V.

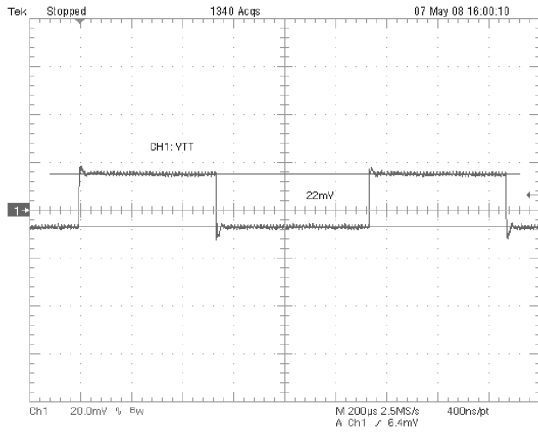

- A Test condition: VTT Sink/Source 1 A, VTT transient load regulation: 22 mV, Test point: VTT TP7 (+) and TP6 (-)

Figure 9. DDR3 VTT Sink/Source Transient

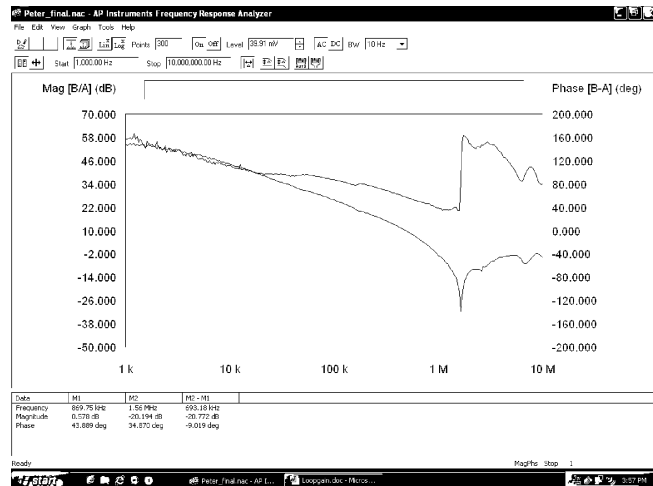

- A Test Condition: $V_{IN}=3.3\text{ V}$, $V_{DDQ}=V_{VLDOIN}=1.5\text{ V}$, $V_{VTT}=V_{VTTREF}=0.75\text{ V}$, $I_{VTT}=1\text{ A}$
Source Test Results: Phase margin: 43.8°, Gain margin: 20.19 dB, Crossover frequency: 869.75 kHz

Figure 10. Bode Plot for DDR3 Application

7 EVM Assembly

The following figures (Figure 11 through Figure 14) show the design of the TPS51200EVM printed circuit board. The EVM has been designed using 2-Layer, 2-oz. copper-clad circuit board containing all components on the bottom side.

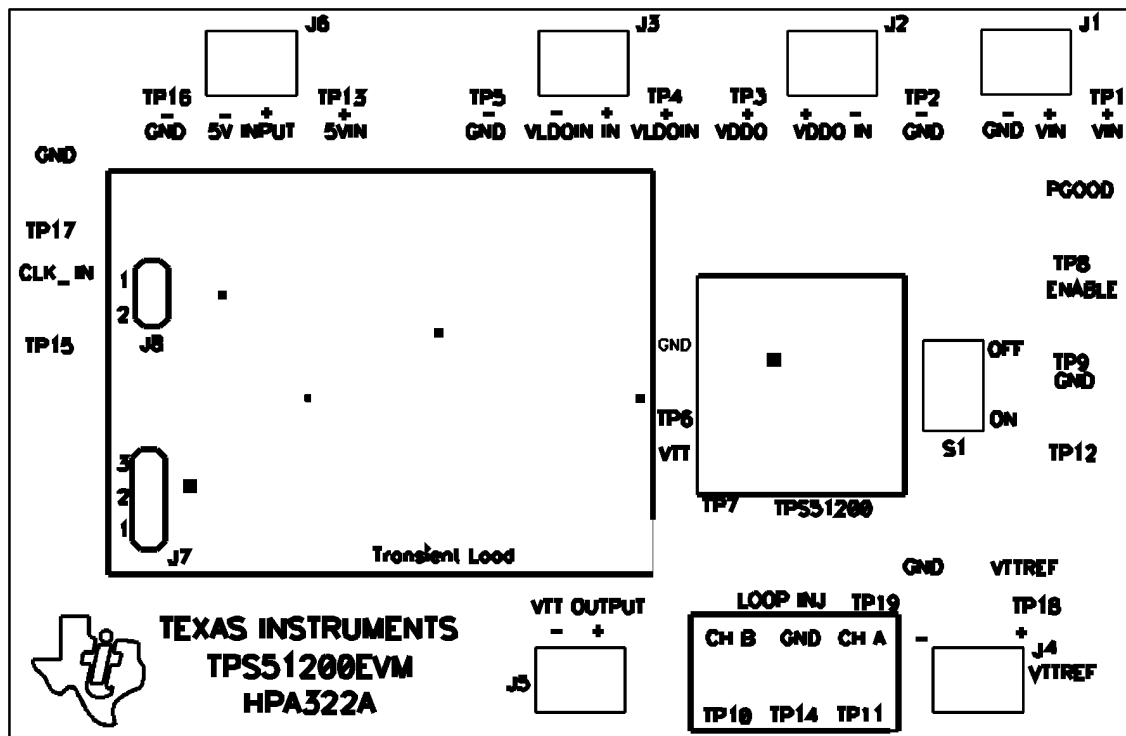


Figure 11. Bottom Side Silkscreen (Top View)

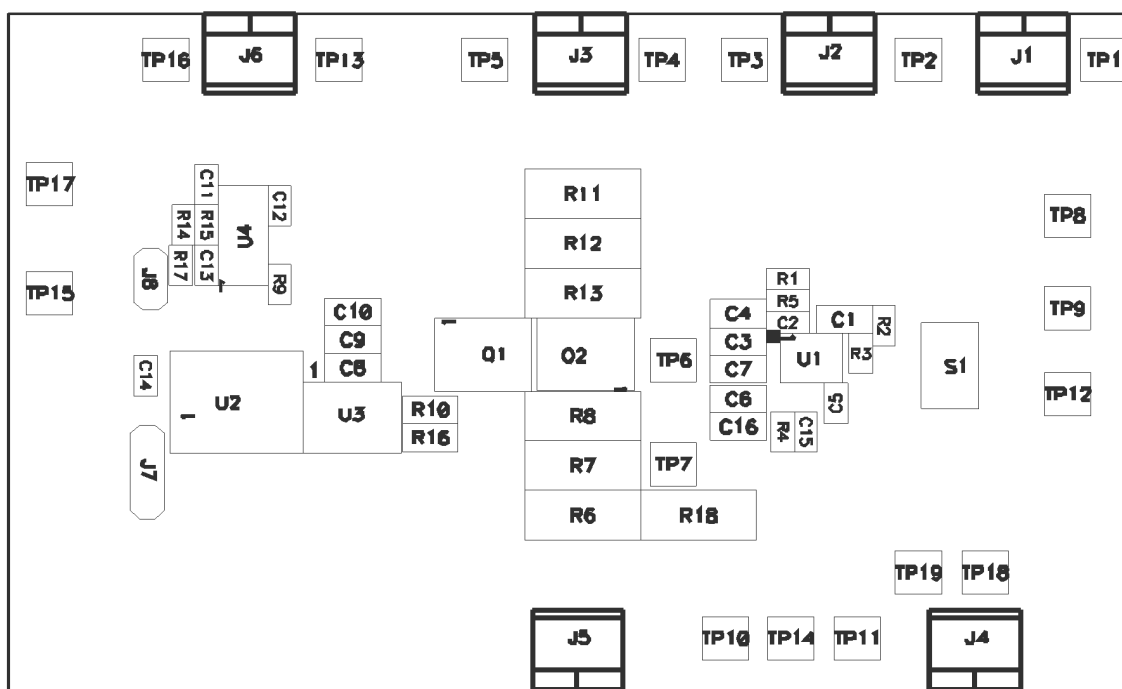


Figure 12. Bottom Side Assembly

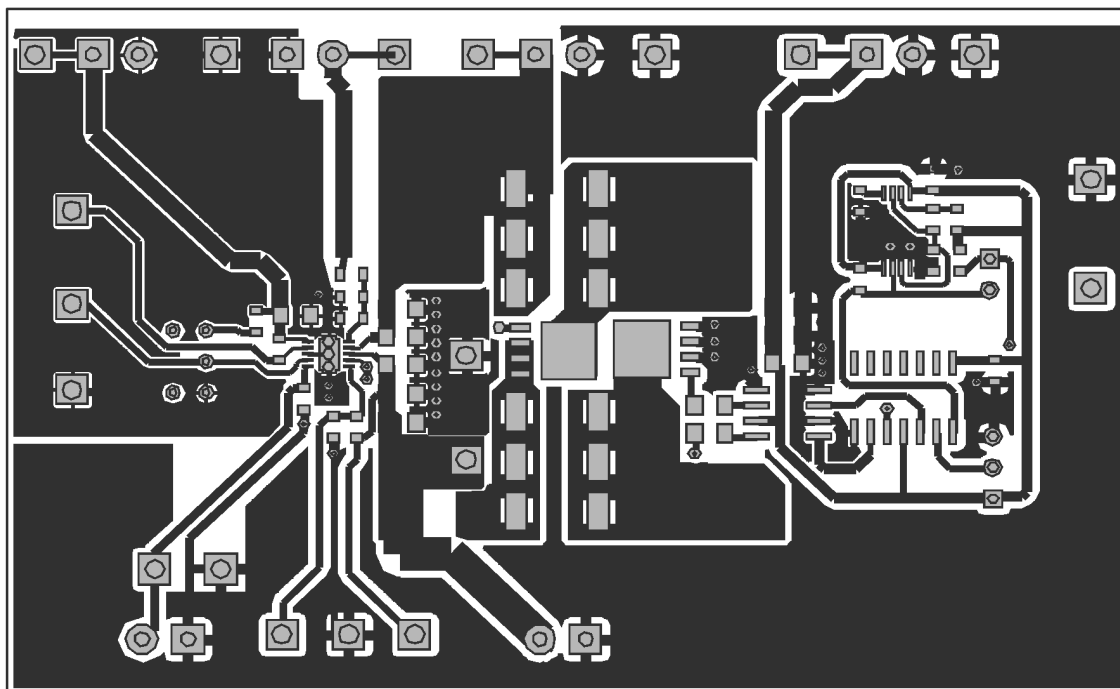


Figure 13. Bottom Side Copper

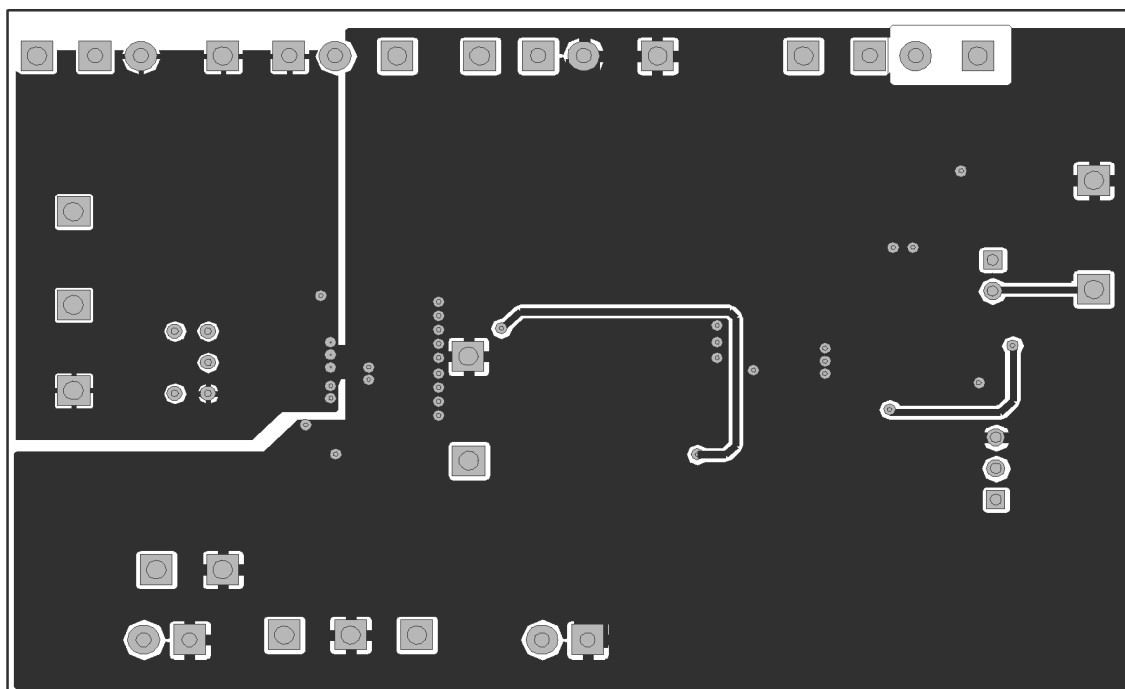


Figure 14. Top Side Copper

8 List of Materials

Table 4 lists the materials required for the TPS51120EVM.

Table 4. List of Materials

QYT	REFERENCE DESIGNATOR	VALUE	DESCRIPTION	SIZE	PART NUMBER	MFR
9	C1, C3, C4, C6, C7, C8, C9, C10, C16	10 μ F	Capacitor, Ceramic, 10 V, X7R, $\pm$ 10%	0805	Std	Std
2	C11, C14	1 μ F	Capacitor, Ceramic, 10 V, X5R, $\pm$ 10%	0603	Std	Std
1	C15	10 pF	Capacitor, Ceramic, 50 V, COG, $\pm$ 5%	0603	Std	Std
1	C2	1 nF	Capacitor, Ceramic, 50V, X7R, $\pm$ 10%	0603	Std	Std
3	C5, C12, C13	0.1 μ F	Capacitor, Ceramic, 16V, X7R, $\pm$ 10%	0603	Std	Std
6	J1, J2, J3, J4, J5, J6		Terminal Block, 2-pin, 6 A, 3.5 mm	0.27" $\times$ 0.25"	ED555/2DS	OST
1	J7		Header, Male 3-pin, 100 mil spacing, (36-pin strip)	0.100" $\times$ 3"	PTC36SAAN	Sullins
1	J8		Header, Male 2-pin, 100 mil spacing, (36-pin strip)	0.100" $\times$ 2"	PTC36SAAN	Sullins
2	Q1, Q2		MOSFET, N-channel, 30 V, 50 A, 2.2 m Ω	TDSON-8	BSC022N03S	Infineon
2	R1, R5	10 k Ω	Resistor, Chip, 1/10W, 5%	0603	Std	Std
2	R10, R16	100 Ω	Resistor, Chip, 1/8W, 1%	0805	Std	Std
1	R14	1 k Ω	Resistor, Chip, 1/10W, 5%	0603	Std	Std
1	R15	7.5 k Ω	Resistor, Chip, 1/10W, 5%	0603	Std	Std
1	R18	0	Resistor, Chip, 1W, 5%	2512	CRCW25120000Z0EG	Vishay
4	R2, R3, R9, R17	100 k Ω	Resistor, Chip, 1/10W, 5%	0603	Std	Std
1	R4	10 Ω	Resistor, Chip, 1/10W, 5%	0603	Std	Std
4	R7, R8, R12, R13	1.5 Ω	Resistor, Chip, 1W, 5%	2512	CRCW25121R50JNEG	Vishay
1	S1		Switch on-on Mini Toggle	0.28 $\times$ 0.18"	G12AP-RO	NKK
6	TP1, TP3, TP4, TP7, TP13, TP18		Test point, red, thru-hole	0.125" $\times$ 0.125"	5010	Keystone
8	TP2, TP5, TP6, TP12, TP14, TP16, TP17, TP19		Test point, black, thru-hole	0.125" $\times$ 0.125"	5011	Keystone
5	TP8, TP9, TP10, TP11, TP15		Test point, white, thru-hole	0.125" $\times$ 0.125"	5012	Keystone
1	U1		IC, Sink/Source DDR Termination Regulator	DRC	TPS51200DRC	TI
1	U2		IC, QUAD, 2-input positive NAND gates	SO-14	SN74AHCT00D	TI
1	U3		IC, Dual 4-A High Speed low-side power MOSFET drivers	SO-8	UCC27325D	TI
1	U4		IC, Precision Timer	TSSOP-8	NE555PW	TI
0	R6,R12		Not installed			
1			Printed circuit board	3.4" $\times$ 2.2" $\times$ 0.0625"	HPA322	Any
4	Bumpon		Rubber bumper bumpon, transparent	0.44" $\times$ 0.2"	SJ5303	3M
2	Jumper		lack	0.100"	2-382811-1	Tyco/AMP

9 References

Integrated LDO With Switch-Over Circuit for Notebook Computers data sheet ([SLUS808](#)).

Using the TPS51103EVM, Integrated 3.3V/5V Power LDO with Clock Output data sheet ([SLUU303](#)).

EVALUATION BOARD/KIT IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM WARNINGS AND RESTRICTIONS

It is important to operate this EVM within the input voltage range of VREG + 0.5 V to 5.2 V and the output voltage range of 0 V to 4.2 V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 70°C. The EVM is designed to operate properly with certain components above 70°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright 2008, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated