



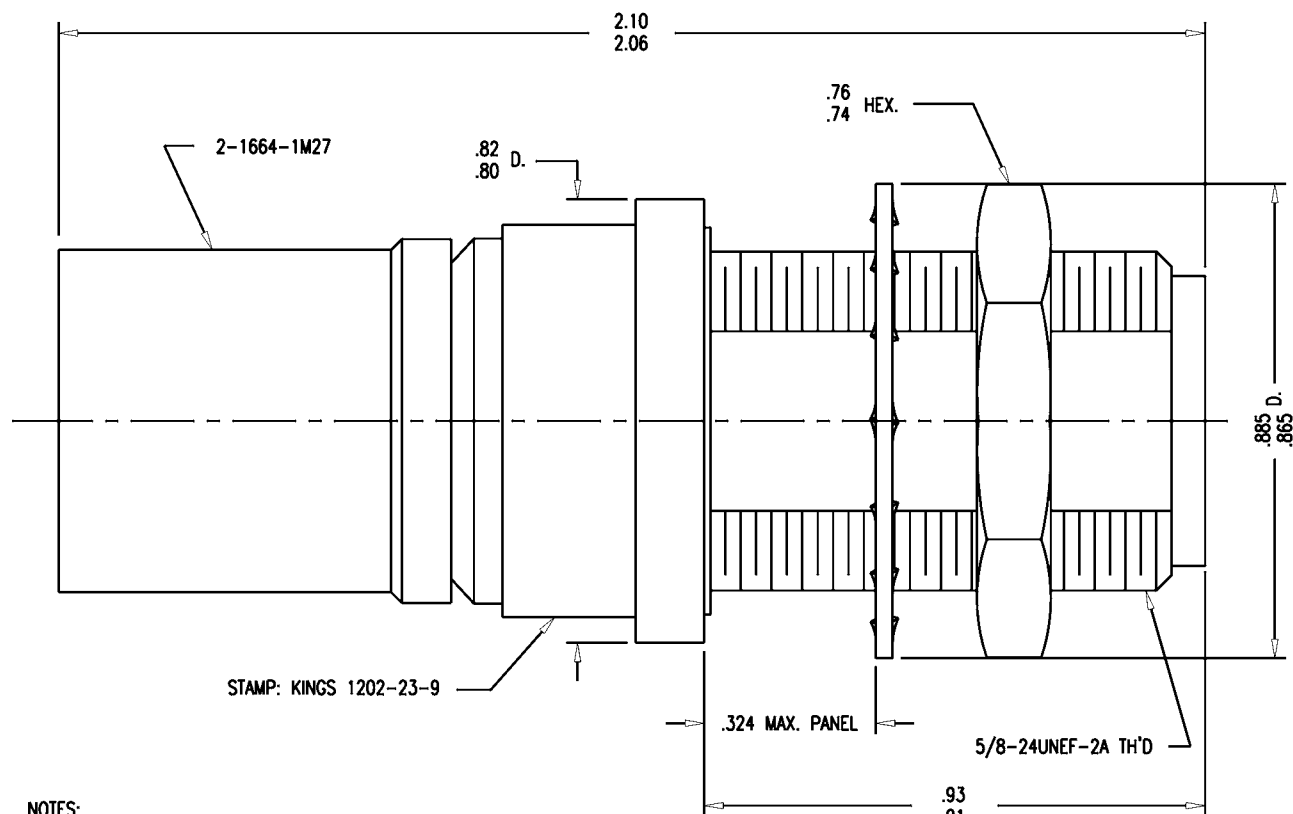

NOTES:

1. FOR USE WITH BOEING S280W503-6 & ADAMS RUSSELL FC48Z CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2229.
4. INTERFACE PER MIL-STD-348, FIG. 304-2.
5. CENTER CONTACT (1-7272-1MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 1202-23-9
XXXX (DATE CODE)
7. MATERIALS:
INSULATOR-TEFLON, ASTM-D-4894
LOCKWASHER-PHOS. BRONZE, QQ-B-750
CENTER CONTACT-BER. COP., ASTM-B-196
K-GRIP SLEEVE-COM. BRONZE, ASTM-B-135
GASKET-SILICONE RUBBER, ZZ-R-765
ALL OTHER METAL PARTS-BRASS, ASTM-B16
8. FINISHES:
CENTER CONTACT-GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 GHZ
WORKING VOLTAGE-1000 VRMS

GSD



MOUNTING HOLE

GSD

1202-23-9

REVISIONS

ISSUE	CHANGES	
	ER	35535
0	KH	04/18/94

KAM3637

SCALE 4:1	
APPROX SURFACE AREA	
WAS: E-18300	
USED ON	
REF: BOEING	
JACK, BULKHEAD, N	
DRAWN KH	DATE 04/08/94
DESIGN JT	DATE 04/11/94
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1202-23-9