

Plug-In

Power Splitter/Combiner

PSCQ-2-70N

2 Way-90° 50Ω 66 to 74 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.

Pin Connections

SUMPORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	5
GROUND	3,4,7,8
CASE GROUND	3,4,7,8
50 OHM TERM EXTERNAL	6

Outline Drawing

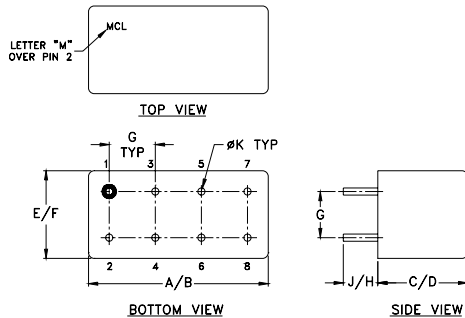

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Features

- low insertion loss, 0.2 dB typ.
- low amplitude unbalance, 0.25 dB max.
- excellent phase unbalance, 0.5 deg. typ.
- rugged shielded case

Applications

- modulators
- balanced amplifiers



CASE STYLE: A01




PRICE: \$28.20 ea. QTY. (1-9)

Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ.	Min.	Typ.	Max.	Max.	Max.
66-74	22	19	0.2	0.5	0.8	0.25

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
66.00	3.15	3.24	0.09	23.12	89.40	1.11	1.16	1.09
66.20	3.16	3.25	0.09	23.08	89.45	1.12	1.16	1.09
66.60	3.15	3.25	0.11	23.02	89.40	1.12	1.16	1.09
67.00	3.15	3.25	0.11	22.94	89.45	1.12	1.17	1.10
67.60	3.15	3.26	0.11	22.82	89.48	1.12	1.17	1.10
68.20	3.15	3.27	0.12	22.71	89.49	1.12	1.17	1.10
68.80	3.15	3.27	0.13	22.60	89.57	1.12	1.17	1.10
69.40	3.15	3.28	0.12	22.50	89.55	1.12	1.17	1.10
70.00	3.15	3.28	0.13	22.38	89.57	1.13	1.18	1.10
70.80	3.16	3.28	0.12	22.24	89.62	1.13	1.18	1.10
71.60	3.17	3.28	0.11	22.09	89.69	1.13	1.18	1.10
72.40	3.18	3.28	0.10	21.94	89.72	1.13	1.19	1.11
73.20	3.20	3.28	0.08	21.79	89.78	1.14	1.19	1.11
73.60	3.21	3.27	0.07	21.72	89.77	1.14	1.19	1.11
74.00	3.21	3.27	0.06	21.64	89.84	1.14	1.19	1.11

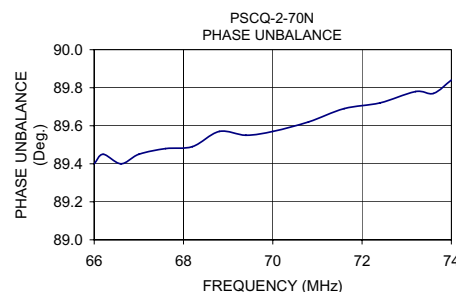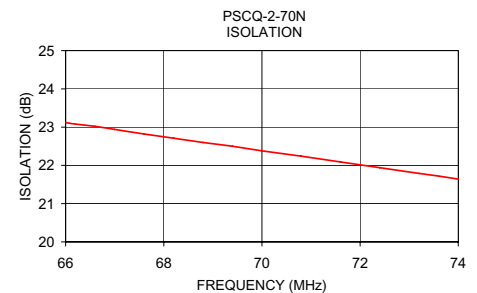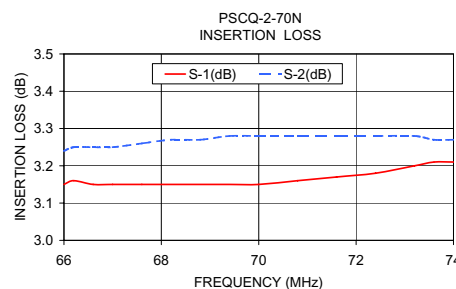

electrical schematic



Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. OR
M94664
PSCQ-2-70N
HY/TD/CP
060821