


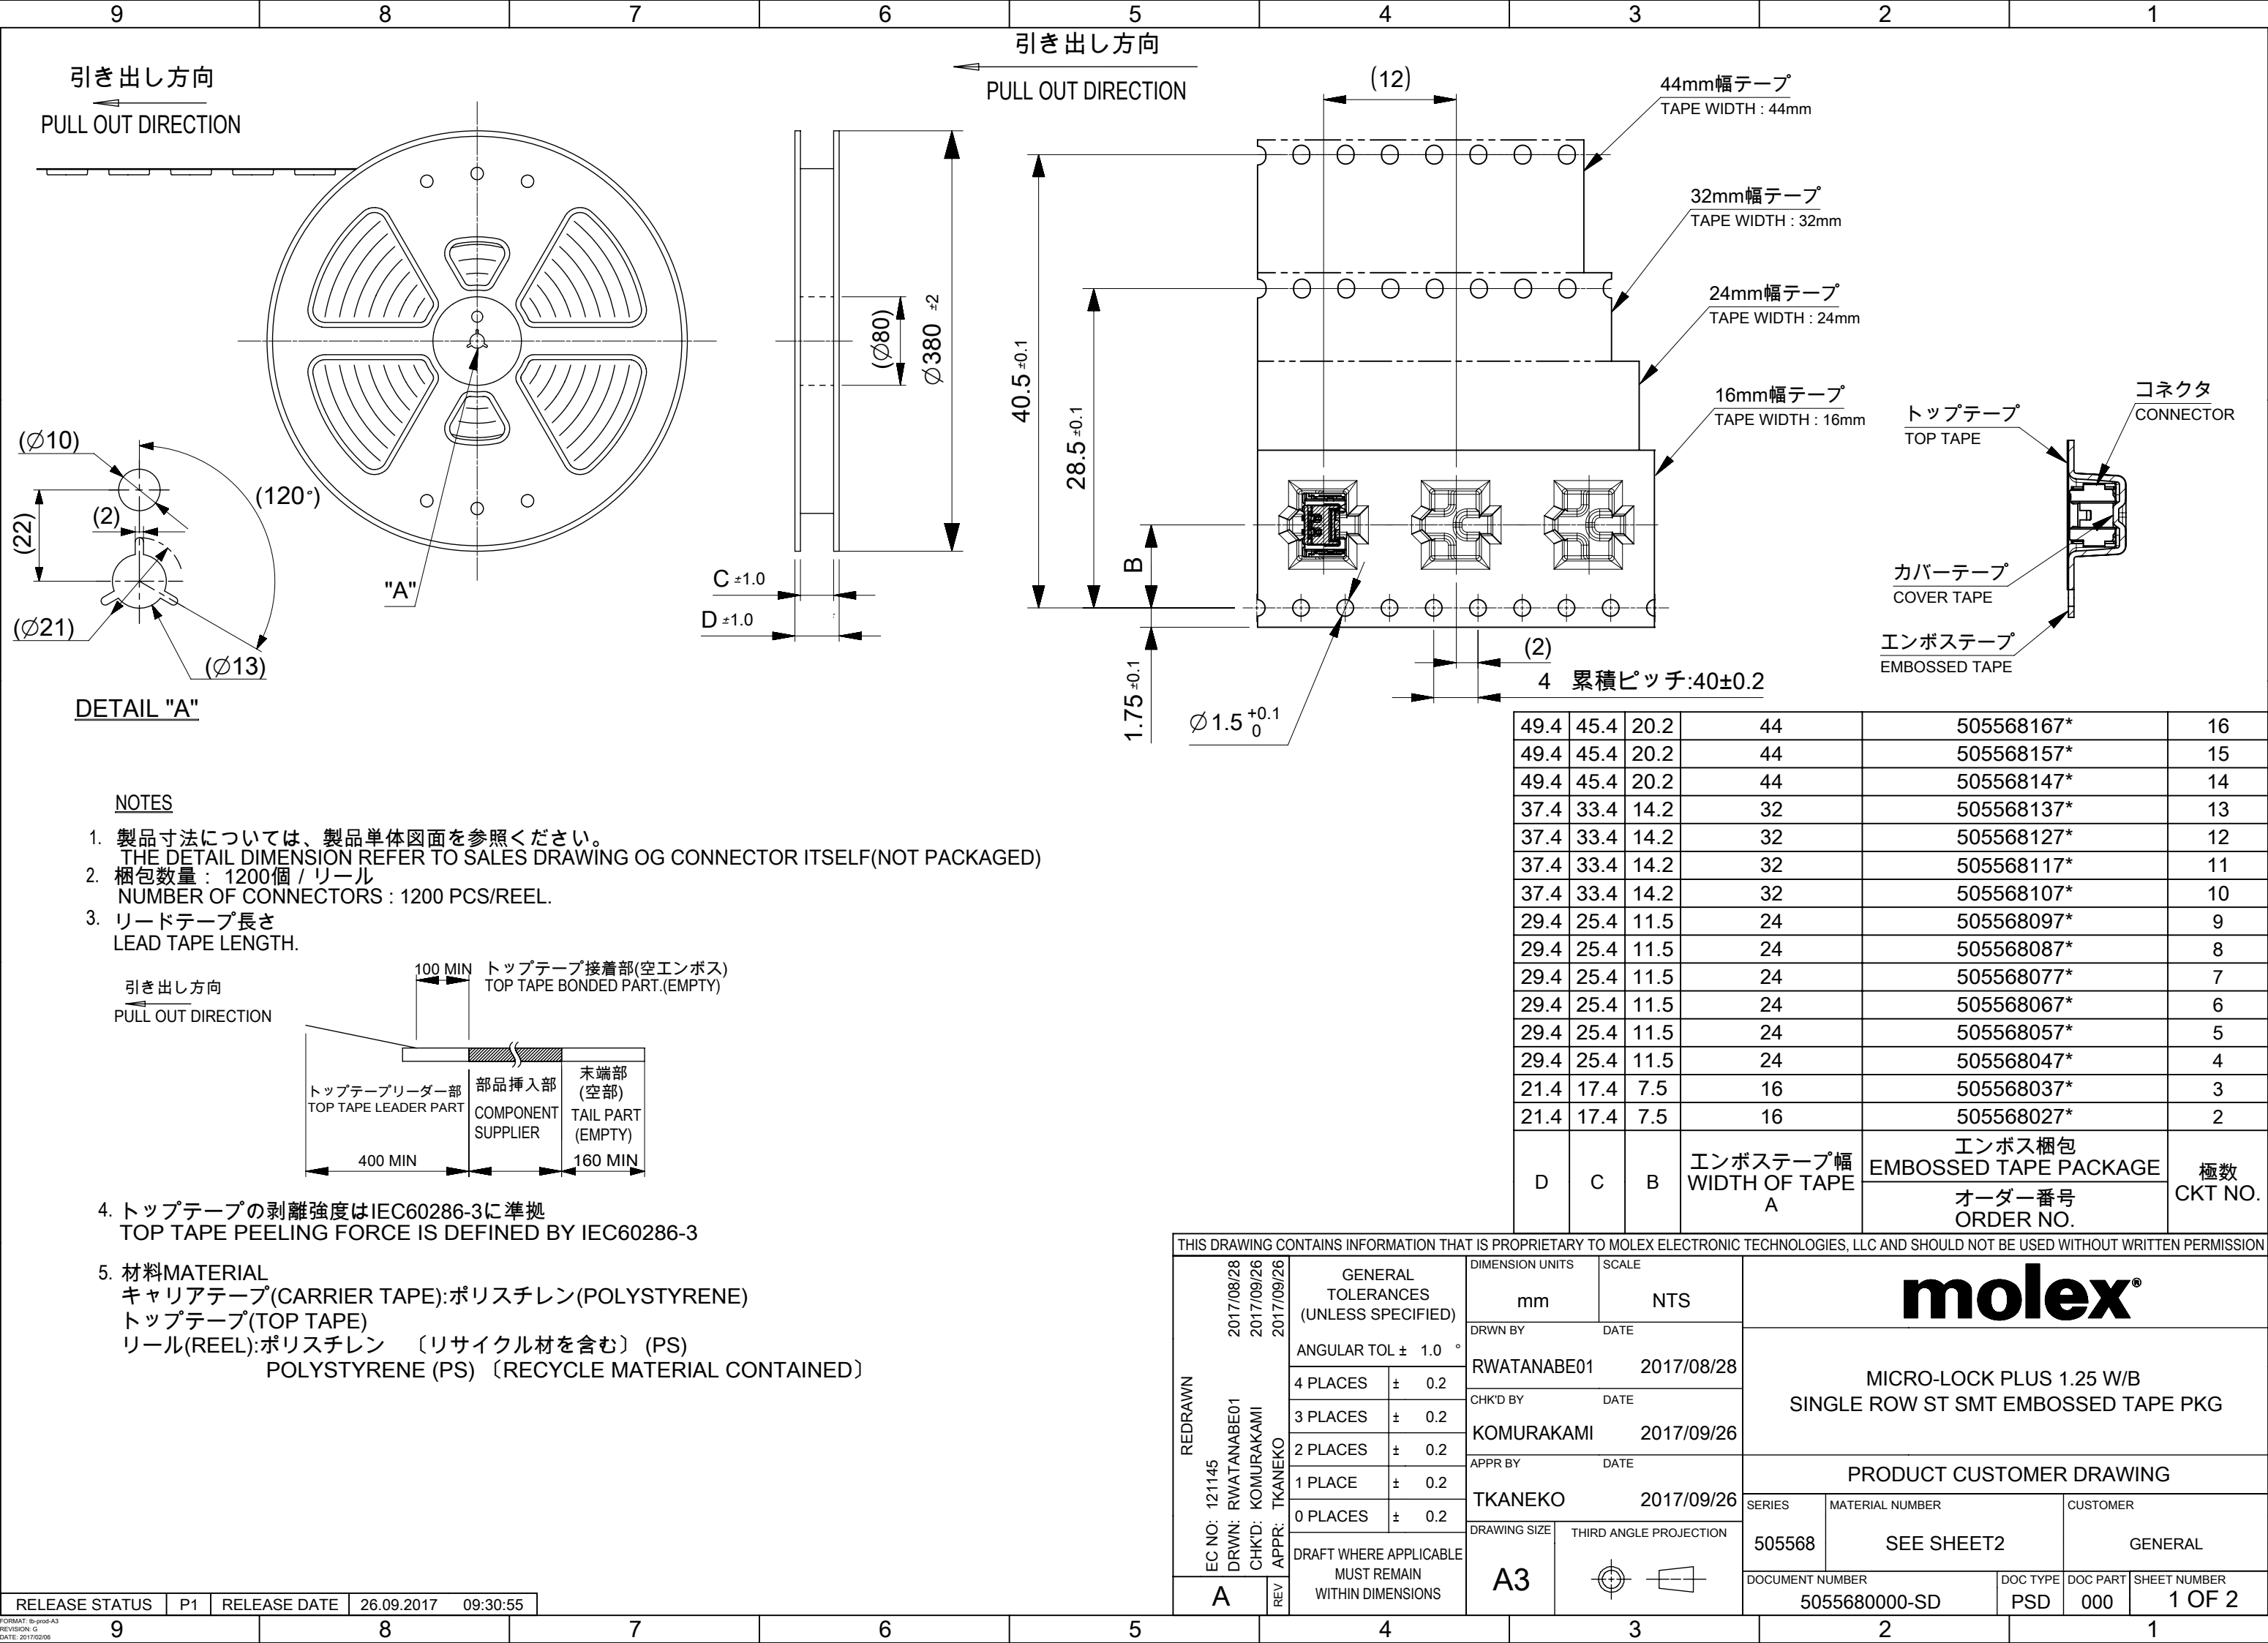


DETAIL "A"

NOTES

- 製品寸法については、製品単体図面を参照ください。
THE DETAIL DIMENSION REFER TO SALES DRAWING OG CONNECTOR ITSELF(NOT PACKAGED)
- 梱包数量：1200個 / リール
NUMBER OF CONNECTORS：1200 PCS/REEL.
- リードテープ長さ
LEAD TAPE LENGTH.


引き出し方向
PULL OUT DIRECTION

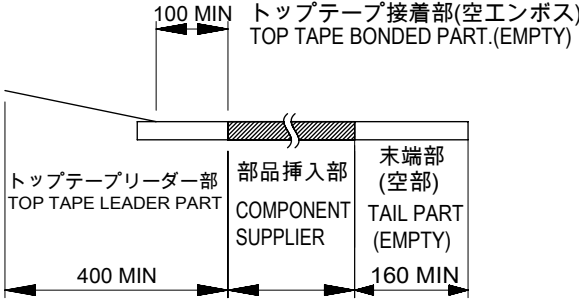

- トップテープの剥離強度はIEC60286-3に準拠
TOP TAPE PEELING FORCE IS DEFINED BY IEC60286-3

- 材料MATERIAL
キャリアテープ(CARRIER TAPE):ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE)
リール(REEL):ポリスチレン〔リサイクル材を含む〕(PS)
POLYSTYRENE (PS)〔RECYCLE MATERIAL CONTAINED〕

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REDRAWN EC NO: 121145 DRWN: RWATANABE01 CHK'D: KOMURAKAMI APPR: TKANEKO	2017/08/28	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS		SCALE		molex®						
	2017/09/26		mm	NTS									
	2017/09/26		ANGULAR TOL ± 1.0 °		DRWN BY		DATE		MICRO-LOCK PLUS 1.25 W/B SINGLE ROW ST SMT EMBOSSED TAPE PKG				
	4 PLACES ± 0.2		RWATANABE01		2017/08/28								
	3 PLACES ± 0.2		CHK'D BY		DATE								
	2 PLACES ± 0.2		KOMURAKAMI		2017/09/26								
	1 PLACE ± 0.2		APPR BY		DATE								
	0 PLACES ± 0.2		TKANEKO		2017/09/26		PRODUCT CUSTOMER DRAWING						
	A		REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE	THIRD ANGLE PROJECTION		SERIES	MATERIAL NUMBER		CUSTOMER	
						A3			505568	SEE SHEET2		GENERAL	
						DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER			
						5055680000-SD		PSD	000	1 OF 2			

