

MICRO SWITCH

A DIVISION OF HONEYWELL-CONTROL SYSTEMS COMPANY
MINNEAPOLIS, MINN.


FED. MFR. CODE 91829

SWITCH-BASIC


CATALOG LISTING

1MK1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

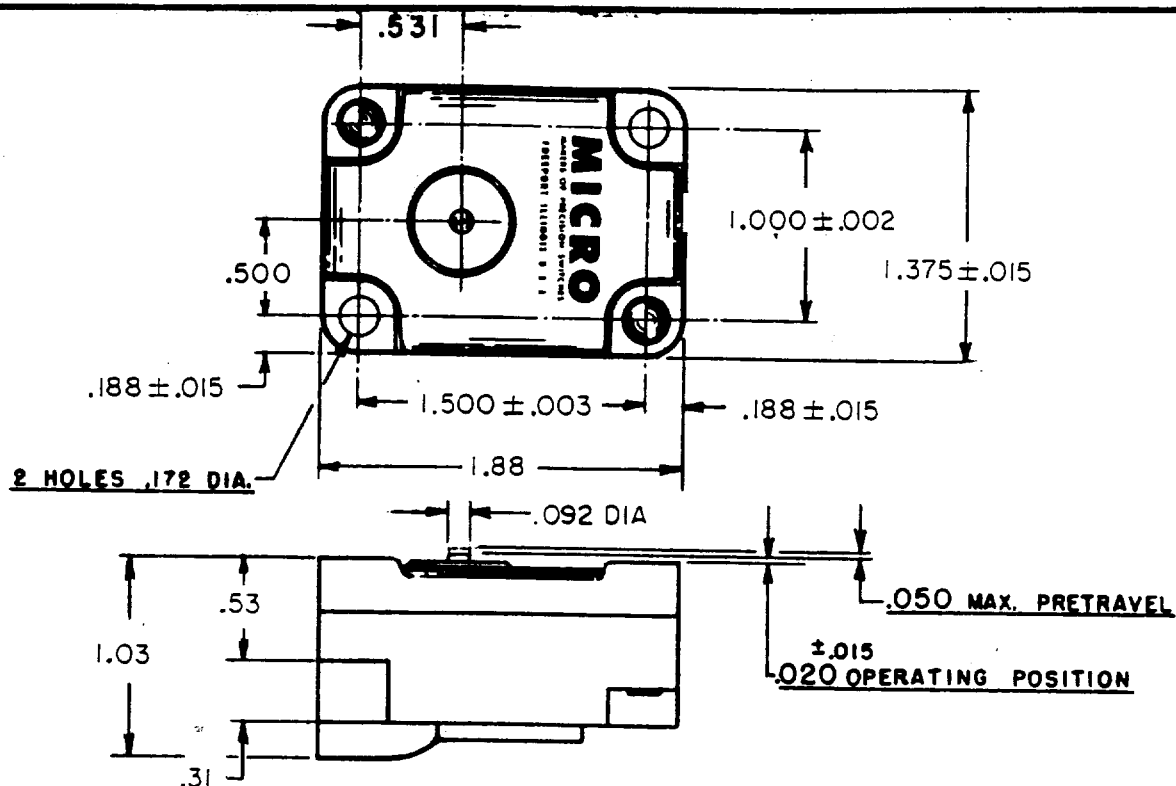

3X 8-32 UNC (.219) BINDING
HEAD COMBINATION TERMINAL
SCREW

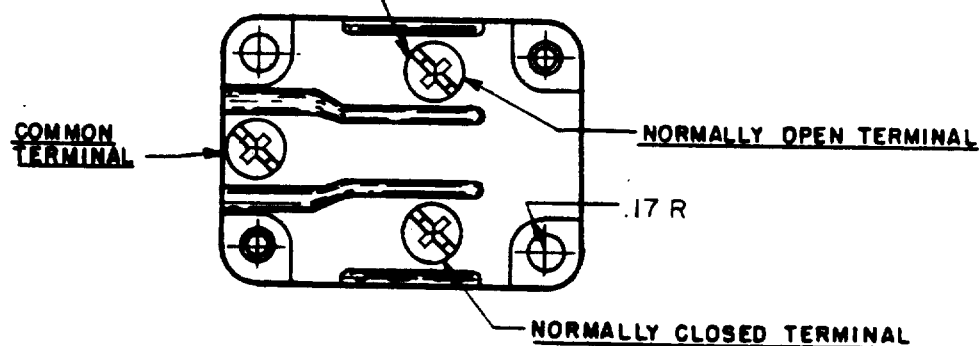

NOTE

— ONLY NO. 8 ROUND HEAD SCREWS AND SAE LIGHT SPRING
WASHER SHOULD BE USED FOR MOUNTING SWITCH IN ORDER
TO PROVIDE PROPER ELECTRICAL CLEARANCES.

CHARACTERISTICS

OPERATING FORCE ——— 14-22 OZ.
RELEASE FORCE ——— 10 OZ. MIN.
DIFFERENTIAL TRAVEL ——— .002-.0075
OVERTRAVEL ——— .010 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
S. P. D. T.

SCALE FULL

DO NOT SCALE PRINT
UNLESS OTHERWISE
SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES ARE
FRACTIONS $\pm$ 1/64
DECIMALS $\pm$.010
ANGLES $\pm$
WEIGHT

1MK1

M

DRAWING
NUMBER

ISSUE
X2

REVISIONS

1-10-54
2-10-54
3-10-54
4-10-54
5-10-54
6-10-54
7-10-54
8-10-54
9-10-54
10-10-54
11-10-54
12-10-54
13-10-54
14-10-54
15-10-54
16-10-54
17-10-54
18-10-54
19-10-54
20-10-54
21-10-54
22-10-54
23-10-54
24-10-54
25-10-54
26-10-54
27-10-54
28-10-54
29-10-54
30-10-54
31-10-54
32-10-54
33-10-54
34-10-54
35-10-54
36-10-54
37-10-54
38-10-54
39-10-54
40-10-54
41-10-54
42-10-54
43-10-54
44-10-54
45-10-54
46-10-54
47-10-54
48-10-54
49-10-54
50-10-54
51-10-54
52-10-54
53-10-54
54-10-54
55-10-54
56-10-54
57-10-54
58-10-54
59-10-54
60-10-54
61-10-54
62-10-54
63-10-54
64-10-54
65-10-54
66-10-54
67-10-54
68-10-54
69-10-54
70-10-54
71-10-54
72-10-54
73-10-54
74-10-54
75-10-54
76-10-54
77-10-54
78-10-54
79-10-54
80-10-54
81-10-54
82-10-54
83-10-54
84-10-54
85-10-54
86-10-54
87-10-54
88-10-54
89-10-54
90-10-54
91-10-54
92-10-54
93-10-54
94-10-54
95-10-54
96-10-54
97-10-54
98-10-54
99-10-54
100-10-54

DRAWN

R. G. C. 30, JULY 54