
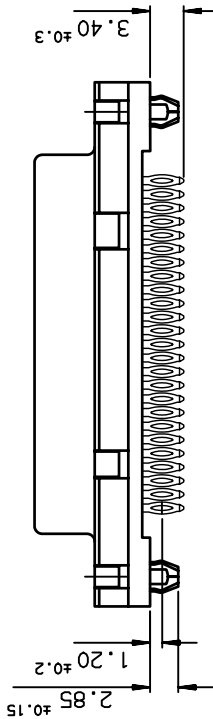


PC board drilling dimensions (after plating)
(thickness ≤ 3.20 ± 0.30 mm)

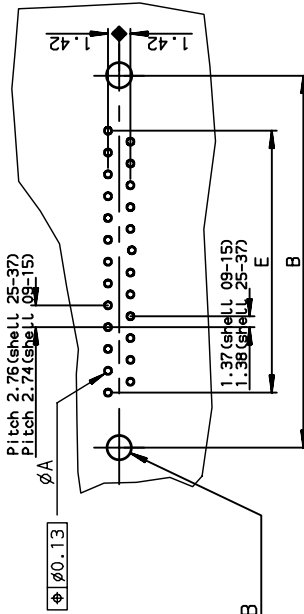

SHELL	A ±0.38	B ±0.12	C ±0.10	D ±0.25	E ±0.07	TIN LEAD	TIN LEAD	TIN LEAD	TIN LEAD	LEAD FREE	LEAD FREE	LEAD FREE
PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S90C6G*00LF	D09S90C6G*00LF	D09S90C6G*00LF	D09S90C6G*00LF	D09S90C6G*00LF	D09S90C6G*00LF	D09S90C6G*00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C6G*00LF	D15S90C6G*00LF	D15S90C6G*00LF	D15S90C6G*00LF	D15S90C6G*00LF	D15S90C6G*00LF	D15S90C6G*00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C6G*00LF	D25S90C6G*00LF	D25S90C6G*00LF	D25S90C6G*00LF	D25S90C6G*00LF	D25S90C6G*00LF	D25S90C6G*00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C6G*00LF	D37S90C6G*00LF	D37S90C6G*00LF	D37S90C6G*00LF	D37S90C6G*00LF	D37S90C6G*00LF	D37S90C6G*00LF
						gold flash	0.76 μ gold	1.27 μ gold	gold flash	0.76 μ gold	1.25 μ gold	

Threaded ØT M3 = L
Threaded ØT 4.40 = X

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

surface	150	1302	tolerance std	150	406	150	1101	projection	mm
www.fciconnect.com	✓		TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	JARRY	1994/09/21	ANGULAR	0.X	±0.1	size	A3	Scale	2
Eng	JARRY	1994/09/21	LINEAR	0.XX	±0.1	ECN	L508-0226		
Chr	-	-	0.X' ±2'	0.XXX	±0.1	Product family	D-SUB	Spec ref	-
Appr	LEGARE	1994/09/21							
rev	ech no	dr	date						
E	-	ATC	2000/12/22						
F	L505-004	LMA	2005/01/12						
G	L506-0097	L60	2006/07/29						
H	L506-0140	L60	2006/09/22						
J	L508-0226	MPE	2008/12/09						
-	-	-	-						
-	-	-	-						



FEMALE CONNECTOR DELTA LOW
PROFIL STRAIGHT PRESS-FIT

Rev. C01-8646-0310
CUSTOMER sheet 1 of 1