


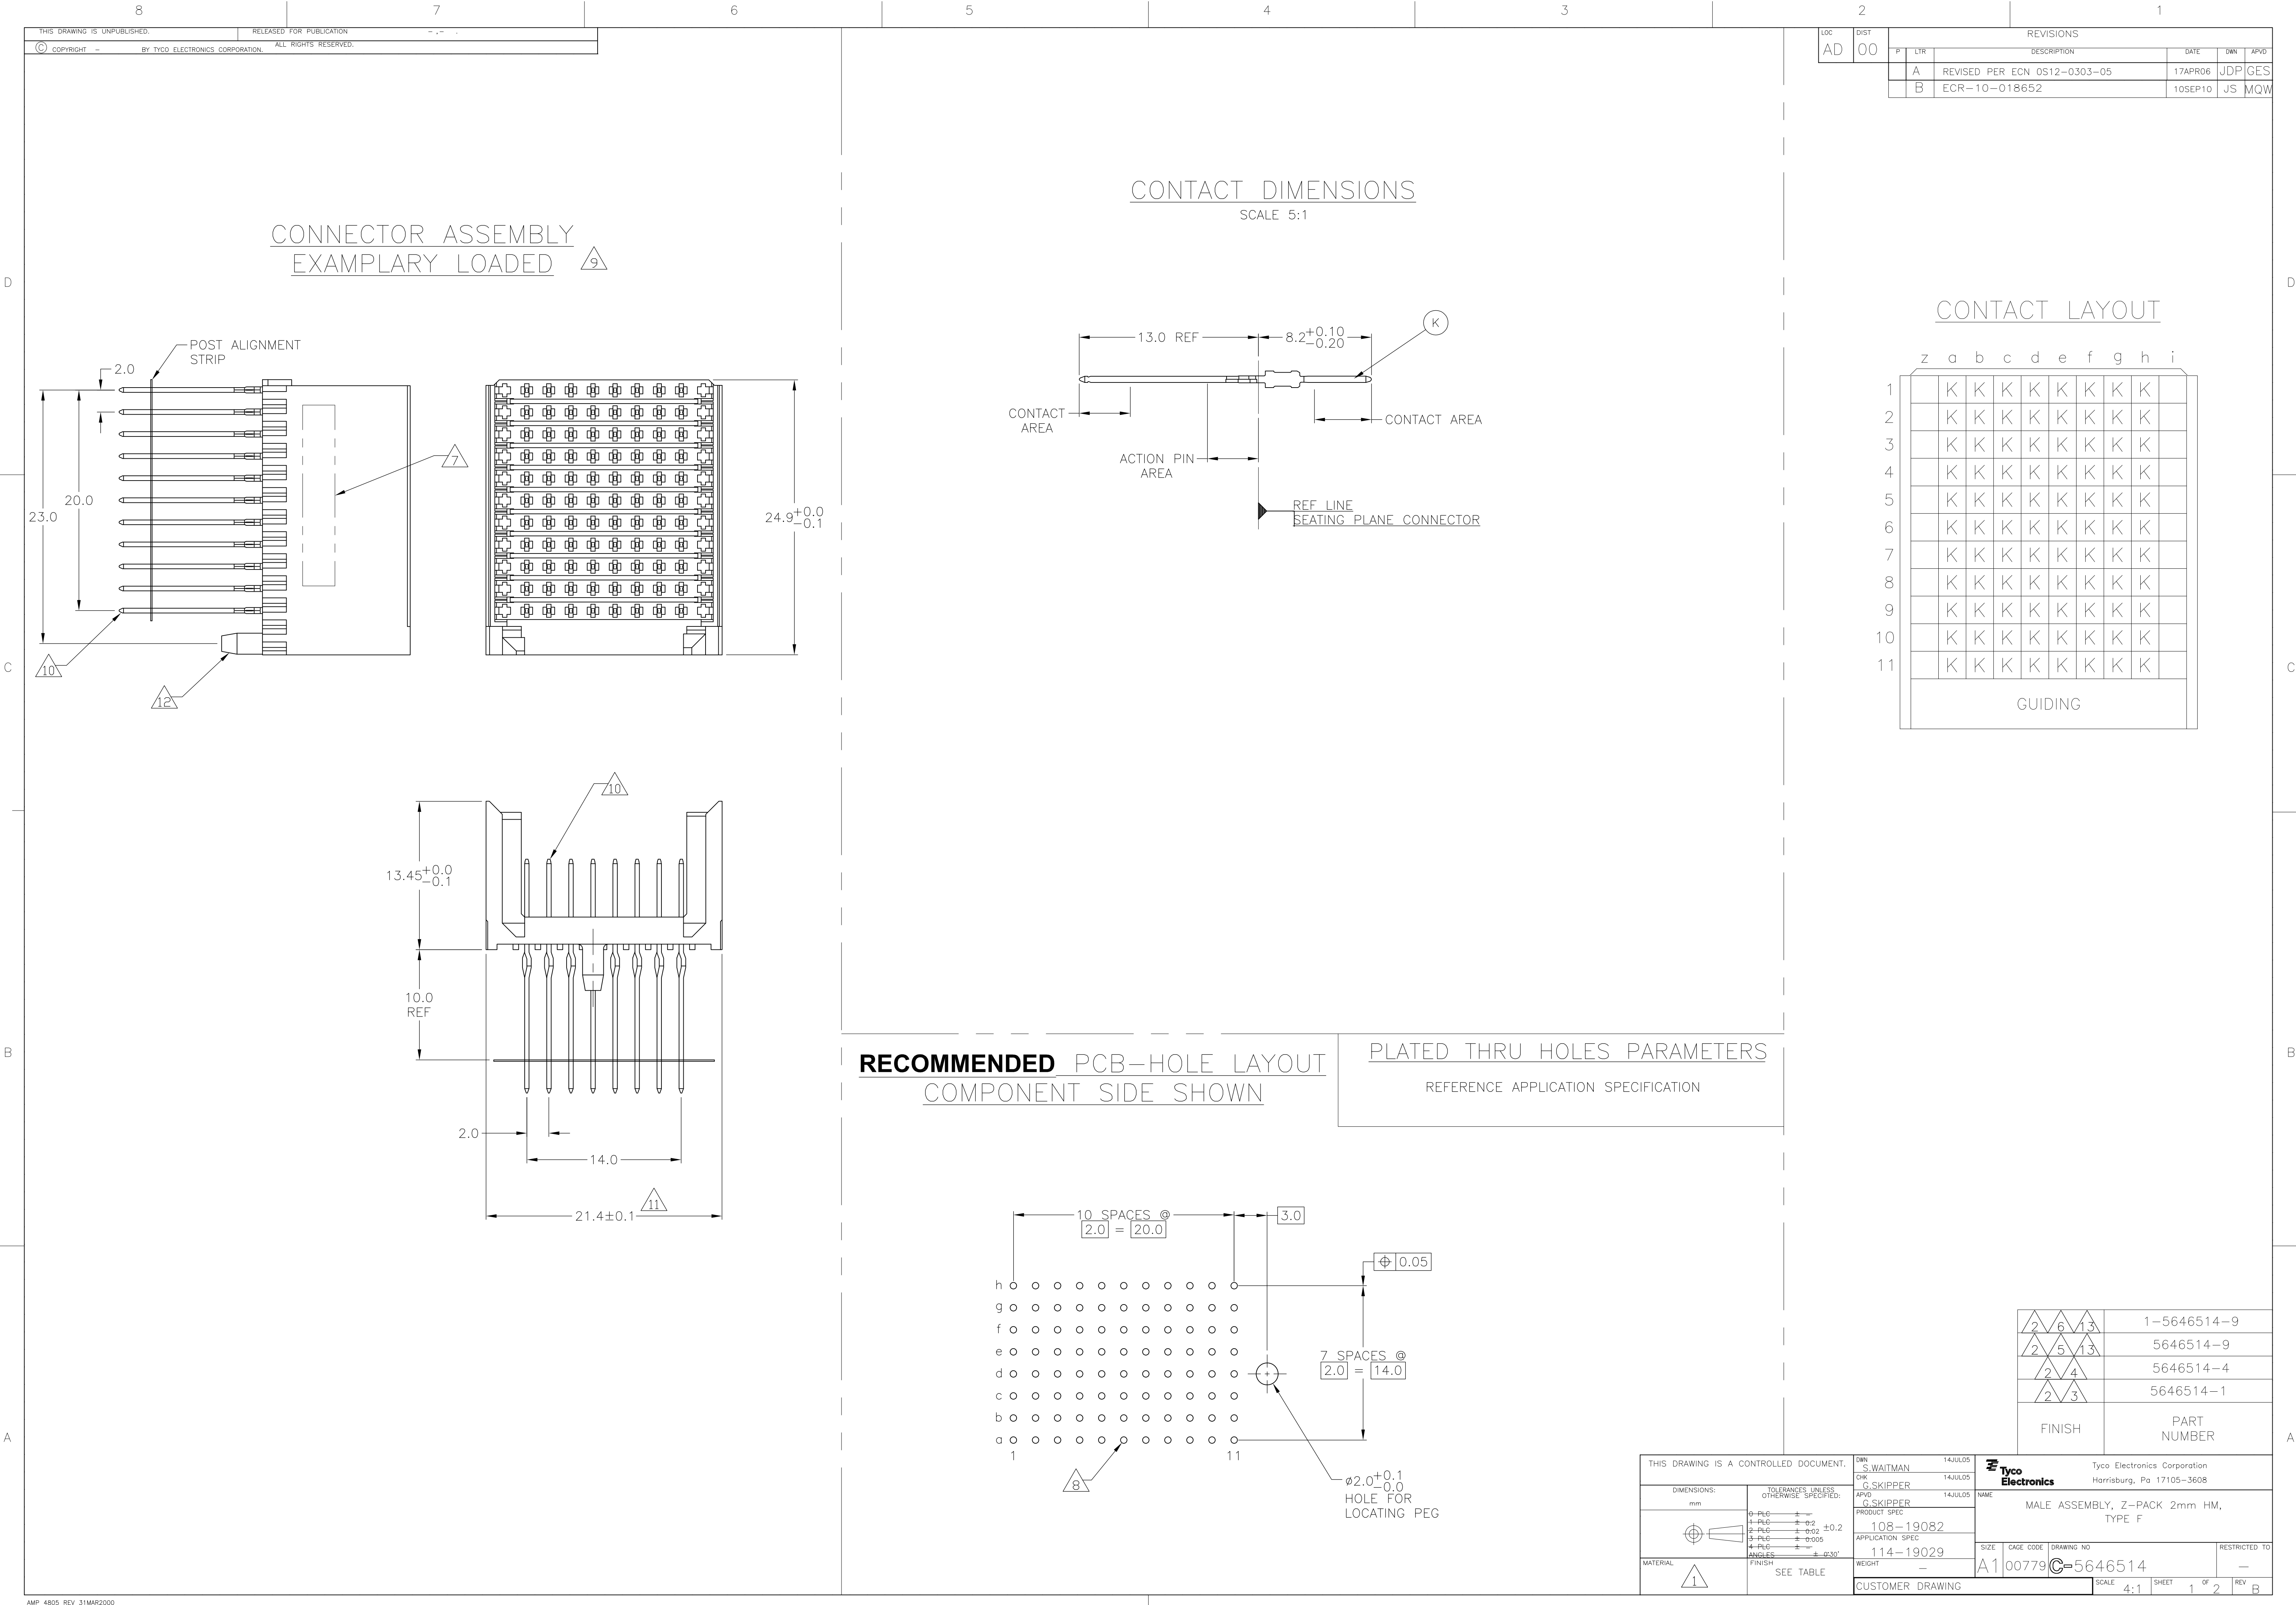

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

AD

00

REV

LTR

DESCRIPTION

DATE

DWN

APVD

—

—

SEE SHEET 1

—

—

—

1

MATERIAL:
CONTACT: PHOSPHOR BRONZE.
HOUSING: GLASS-FILLED POLYESTER.

2

GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27μm MIN NICKEL AND ACTION
PIN: 0.5μm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.

4

CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 1.

5

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
CENTRAL OFFICE APPLICATIONS.

6

CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3,
UNCONTROLLED ENVIROMENT APPLICATIONS.

7

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
ADDITIONAL CHARACTERS OR MARKINGS, AS WELL AS THE LOCATION OF THE MARKINGS,
MAY BE ADDED FOR TRACEABILITY BASED UPON MANUFACTURERS DISCRETION.

8

PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
PATTERN DEFINED BY CONTACT LAYOUT.

9

FOR ACTUAL PIN LOADING SEE "CONTACT LAYOUT".

10

FOR ACTUAL PIN DIMENSIONS SEE "CONTACT DIMENSIONS".

11

TO BE MEASURED AT BOTTOM OF SHROUD.

12

LOCATION PEG.

13

CONNECTOR LUBRICATED WITH BELCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: TR-NWT-001217 ISSUE 1, SEP 1992.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. WAITMAN

14JUL05

CHK

G. SKIPPER

14JUL05

APVD

G. SKIPPER

14JUL05

DIMENSIONS:

mm

0-PLG

±

1-PLG

±

0.2

2-PLG

±

0.02

3-PLG

±

0.005

4-PLG

±

0.30°

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

MALE ASSEMBLY, Z-PACK 2mm HM,
TYPE F

108-19082

114-19029

PRODUCT SPEC

APPLICATION SPEC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

MATERIAL

SEE SHEET 1

FINISH

SEE SHEET 1

WEIGHT

—

CUSTOMER DRAWING

SCALE

4:1

SHEET

2

OF

2

REV

B

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

AMP 4805 REV 31MAR2000