
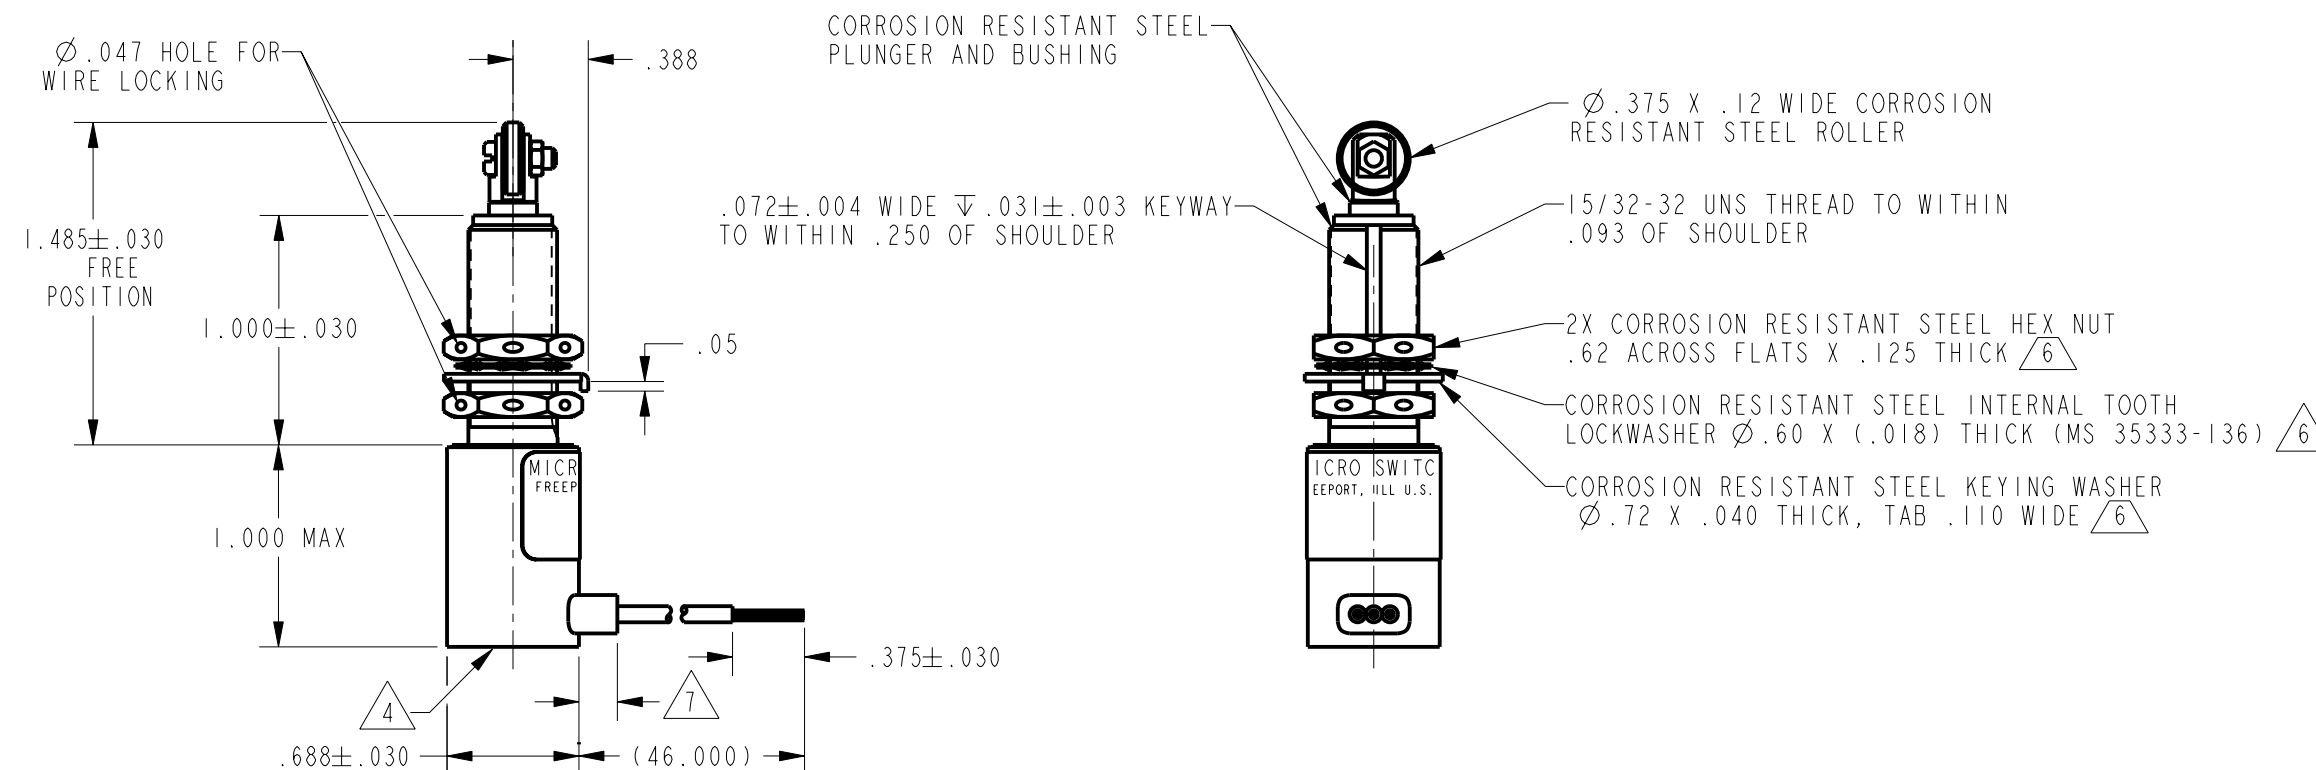


CIRCUIT DIAGRAM

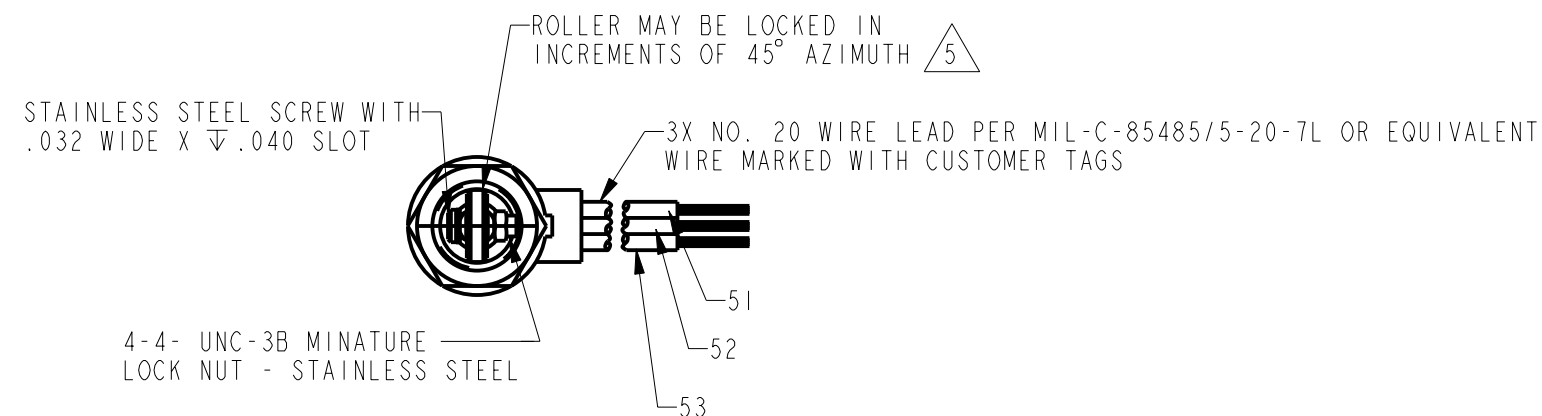

NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
2 - SWITCH SEALED PER MIL-S-8805, SYMBOL 4
3 - CIRCUIT DIAGRAM, CATALOG LISTING, AND DATE CODE ARE SHOWN ON NAMEPLATE
4 SILICONE POTTING MATERIAL FLUSH TO .070 UNDERFLUSH OF HOUSING
5 TO ADJUST ROLLER DIRECTION: REMOVE LOCK NUT, SCREW AND ROLLER,
DEPRESS PLUNGER UNTIL IT CAN BE ROTATED TO DESIRED POSITION,
RETURN PLUNGER TO FREE POSITION AND REASSEMBLE ROLLER
6 HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
7 SILICONE POTTING MATERIAL .175 MAX FROM HOUSING

ANSI Y14.5M-1982 APPLIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[622EN96](#)