

PRODUCT NUMBER	DIM "J"	DIM "K"
76308-XXX(LF)	SEE SHEET 2/2	

WHEN NEEDED, SUFFIX LETTER "LF" INDICATES THE PRODUCT IS RoHS COMPATIBLE, SEE NOTE 5


WHEN SUFFIX "LF" IS REQUIRED, 2µm MIN MATTE TIN OVER 1.27 MIN Ni IS SUPPLIED INSTEAD OF SnPb.

NOTES:

- 1 MATERIAL HOUSING: THERMOPLASTIC POLYESTER
30 % GLASS FILLED, COLOUR BLUE, FLAME RETARDANT PER UL 94-V0.
- 2 MATERIAL BOX: BRASS ASTM B 36 C 26000-H02
- 3 MATERIAL SPRING: BERYLLIUM COPPER ASTM B 194 C 17200-TF 00.
- 4 PLATING: SEE NEXT SHEET
- 5 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-22-008

76308-1XXLF &-2XXLF ARE SIMILAR TO 76308-(1*2)XX, THE SUFFIX 'LF' IS ADDED FOR LEAD FREE IDENTIFICATION.

EXCEPT FOR 76308-9XX; 2µm MIN MATTE TIN OVER 1.27µm Ni IS SUPPLIED INSTEAD OF SnPb.

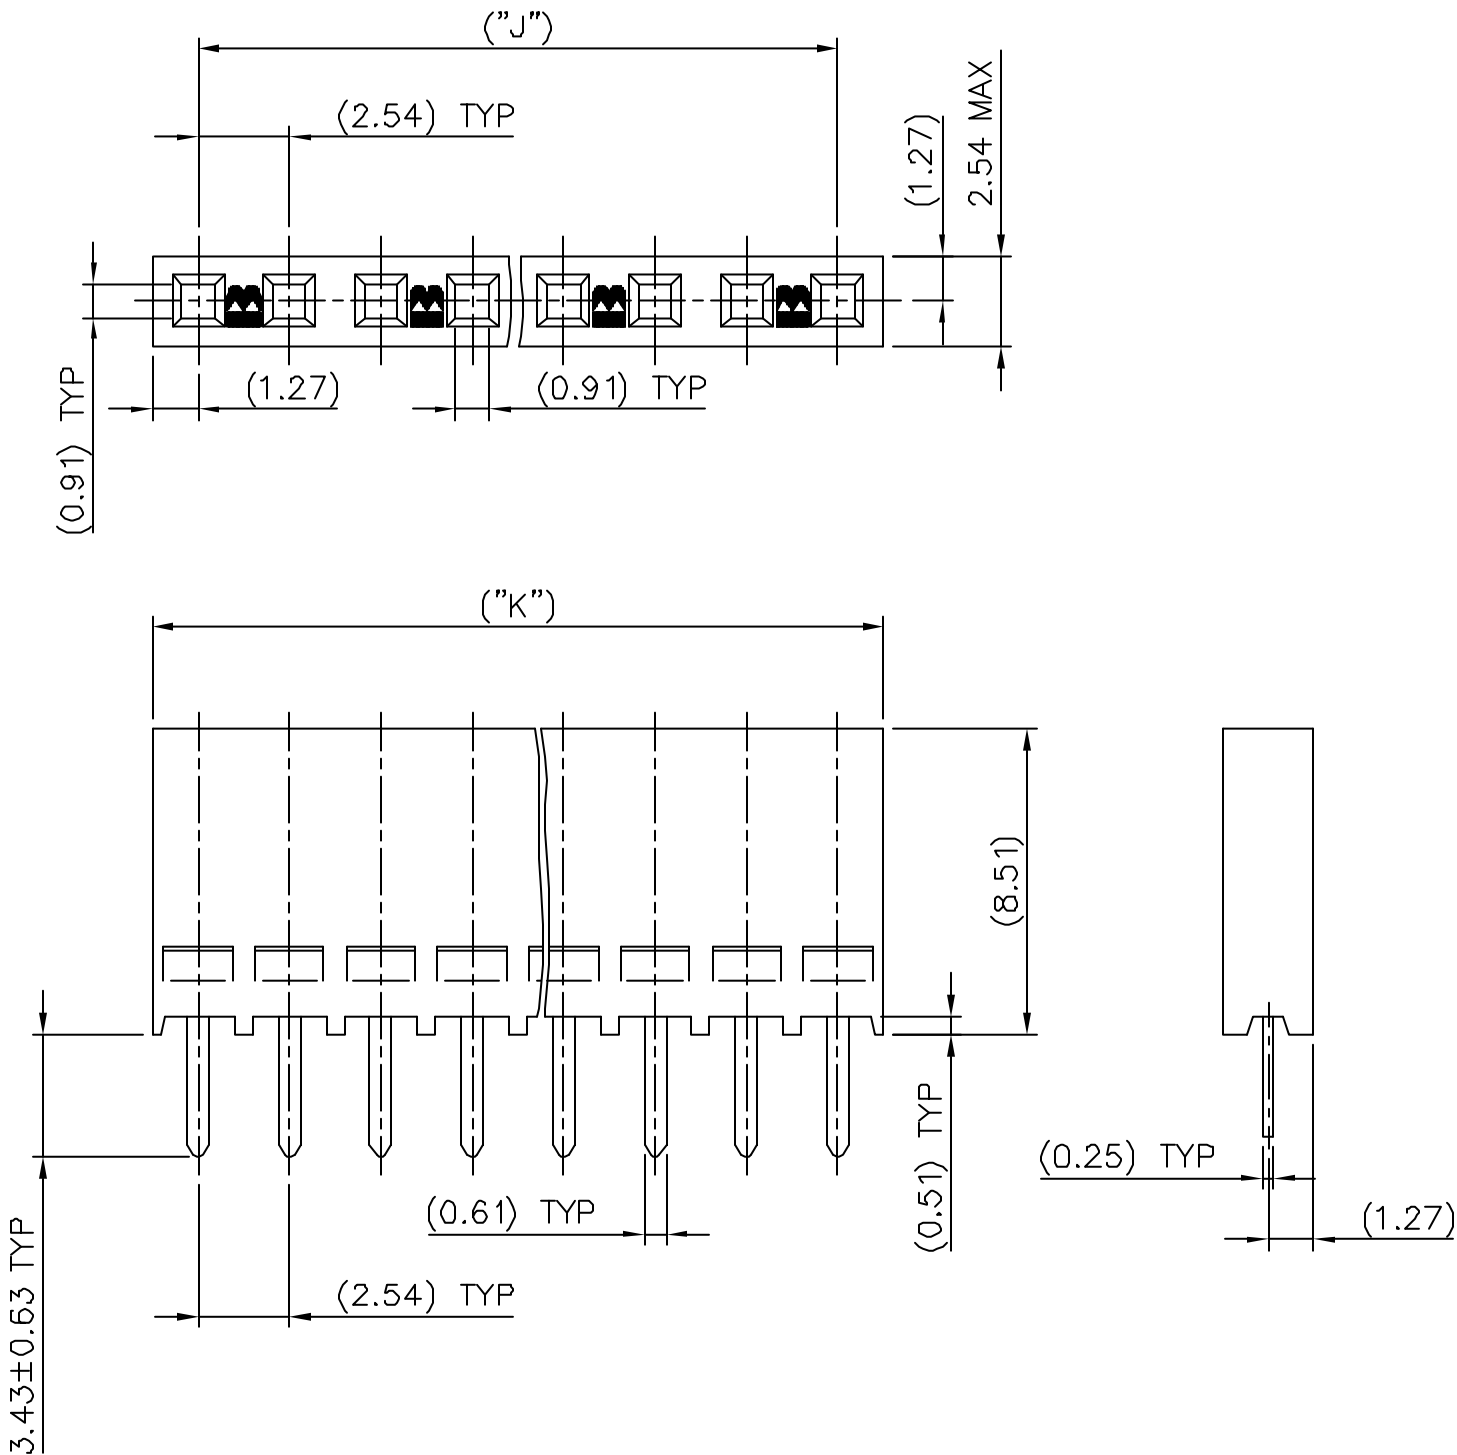

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family BERGCON			
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title V. C. C. SINGLE ROW .100			
M	F06-0216	DLE	06.07.03	angles	linear					
G	V60456	OMA	96.03.11	±2'		scale 5:1	FCI			
H	F80325	PNZ	98.05.06	dr	O. MATHEVON	96.01.29				
J	F10568	DLE	01.10.25	engr	AESCHBACHER	96.01.29				
K	F05.0235	DLE	05.08.25	chr	O. MATHEVON	96.01.29				
L	F05-0282	DLE	05.11.03	appd	M. AE	96.01.29	type CUSTOMER Drawing			
sheet index	revision sheet	M	L	1	2					

