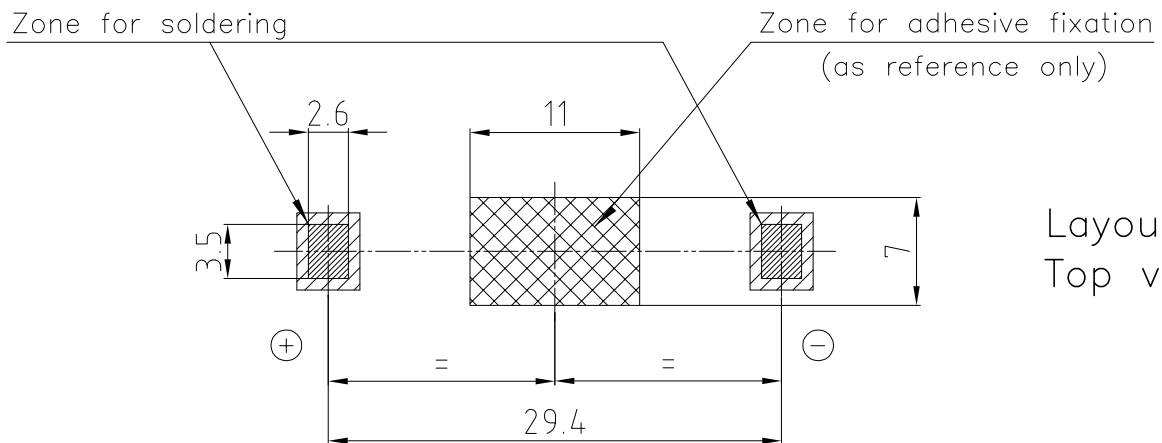
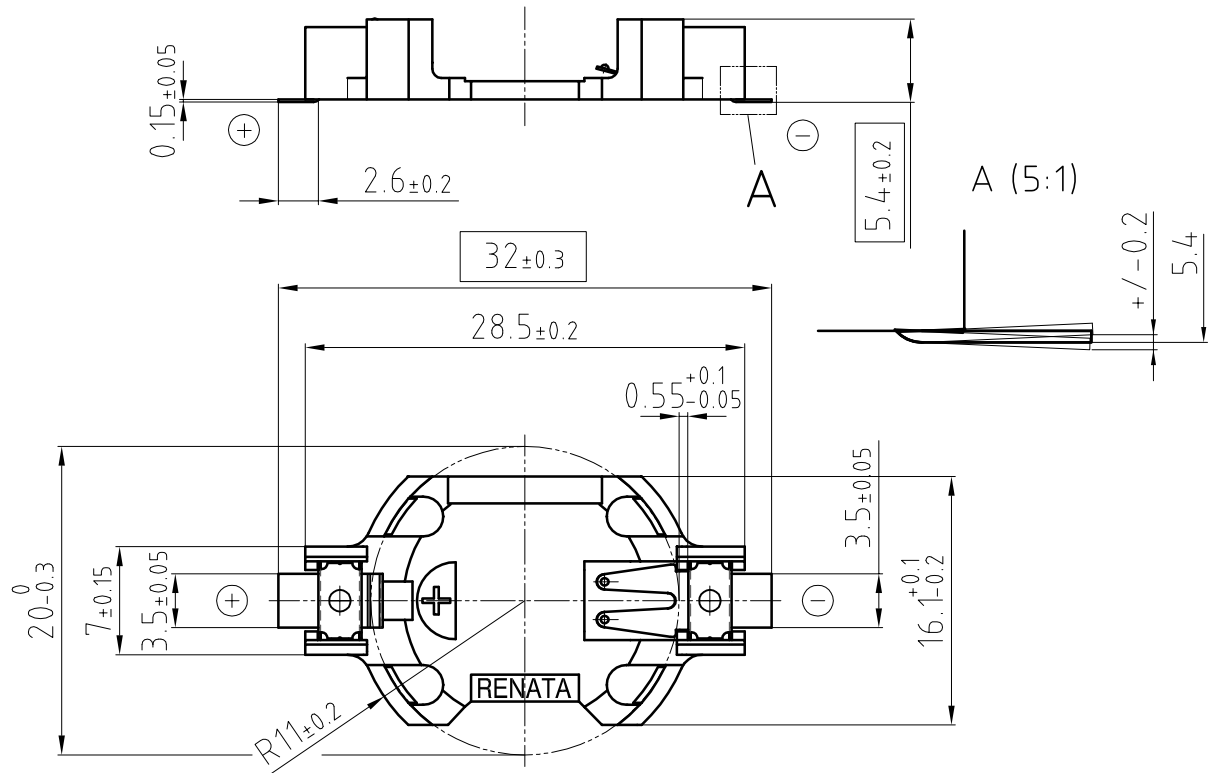


Layout
Top view

- Samples can deviate in the execution from the serie.

Holder material : heat resistant, glass-fiber reinforced LCP

Battery contacts : spring stainless steel 301 nickel plated throughout

Solder contacts : spring stainless steel 301 solder area tin-plated throughout, min. thickness 5 μ m

All framed values will be used for dimension checking !

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Rev.	○			Rev.	○				Customer's Approval		
Rev.	○			Rev.	○				Date		
Rev.	○			Rev.	○				Signature		
Titel: SMTU2032-C								Scale 2:1	Drawn	17.04.12	Wu Ping
									Checked	05.06.12	RKL
									Approved		
renata batteries CH-4452 Itingen Switzerland								10.0833.4 -			