



## Features

- Radial leaded devices
- Fast tripping resettable PTCs
- Binned and sorted narrow resistance ranges available
- RoHS compliant\*
- Agency recognition:   

## Applications

- Customer Premise Equipment (CPE)
- Central Office / Telecom Centers (CO)
- Access equipment

## MF-RX/250 Series - Telecom PTC Resettable Fuses

### Electrical Characteristics

| Model          | Max. Operating Voltage (Vdc) | Max. Interrupt Ratings |          | Hold Current<br>Amps at 23 °C | Initial Resistance |               | One Hour Post-Trip Resistance<br>Ohms at 23 °C |
|----------------|------------------------------|------------------------|----------|-------------------------------|--------------------|---------------|------------------------------------------------|
|                |                              | Volts (Vrms)           | Amps (A) |                               | Ohms at 23 °C      | Ohms at 23 °C |                                                |
|                |                              | Max.                   | Max.     |                               | Min.               | Max.          |                                                |
| MF-RX012/250   | 60                           | 250                    | 3.0      | 0.12                          | 4.0                | 8.0           | 16.0                                           |
| MF-RX012/250-A | 60                           | 250                    | 3.0      | 0.12                          | 7.0                | 9.0           | 16.0                                           |
| MF-RX012/250-C | 60                           | 250                    | 3.0      | 0.12                          | 5.5                | 7.5           | 14.0                                           |
| MF-RX012/250-F | 60                           | 250                    | 3.0      | 0.12                          | 6.0                | 10.5          | 16.0                                           |
| MF-RX012/250-1 | 60                           | 250                    | 3.0      | 0.12                          | 6.0                | 9.0           | 16.0                                           |
| MF-RX012/250-2 | 60                           | 250                    | 3.0      | 0.12                          | 8.0                | 10.5          | 16.0                                           |
| MF-RX012/250-T | 60                           | 250                    | 3.0      | 0.12                          | 7.0                | 12.0          | 16.0                                           |
| MF-RX012/250U  | 60                           | 250                    | 3.0      | 0.12                          | 6.0                | 10.0          | 16.0                                           |
| MF-RX014/250   | 60                           | 250                    | 3.0      | 0.145                         | 3.0                | 6.0           | 14.0                                           |
| MF-RX014/250-A | 60                           | 250                    | 3.0      | 0.145                         | 3.0                | 5.5           | 12.0                                           |
| MF-RX014/250-B | 60                           | 250                    | 3.0      | 0.145                         | 4.5                | 6.0           | 14.0                                           |
| MF-RX014/250-T | 60                           | 250                    | 3.0      | 0.145                         | 5.4                | 7.5           | 14.0                                           |
| MF-RX014/250U  | 60                           | 250                    | 3.0      | 0.145                         | 3.5                | 6.5           | 12.0                                           |
| MF-RX018/250   | 60                           | 250                    | 10.0     | 0.18                          | 0.8                | 2.0           | 4.0                                            |
| MF-RX018/250U  | 60                           | 250                    | 10.0     | 0.18                          | 0.8                | 2.0           | 4.0                                            |

\*"U" suffix indicates product without insulation coating.

### Environmental Characteristics

|                                                           |                                                                               |
|-----------------------------------------------------------|-------------------------------------------------------------------------------|
| Operating/Storage Temperature .....                       | -40 °C to +85 °C                                                              |
| Maximum Device Surface Temperature in Tripped State ..... | 125 °C                                                                        |
| Passive Aging .....                                       | +85 °C, 1000 hours..... ±15 % typical resistance change                       |
| .....                                                     | +60°C, 1000 hours..... ±15 % typical resistance change                        |
| Humidity Aging .....                                      | +85 °C, 85 % R.H. 500 hours ..... ±15 % typical resistance change             |
| Thermal Shock .....                                       | MIL-STD-202F, Method 107G..... ±10 % typical resistance change                |
| .....                                                     | +125 °C to -55 °C, 10 times..... ±15 % typical resistance change              |
| Solvent Resistance.....                                   | MIL-STD-202, Method 215B..... No change                                       |
| Lead Solderability .....                                  | ANSI/J-STD-002..... >95 % coverage                                            |
| Flammability .....                                        | IEC 695-2-2 ..... No Flame for 60 secs.                                       |
| Vibration .....                                           | MIL-STD-883C, Method 2007.1, Condition A ..... ±5 % typical resistance change |

### Test Procedures And Requirements For Model MF-RX/250 Series

| Test                 | Test Conditions                              | Accept/Reject Criteria                      |
|----------------------|----------------------------------------------|---------------------------------------------|
| Visual/Mech. ....    | Verify dimensions and materials .....        | Per MF physical description                 |
| Resistance .....     | In still air @ 23 °C .....                   | $R_{min} \leq R \leq R_{max}$               |
| Time to Trip.....    | 5 times $I_{hold}$ , $V_{max}$ , 23 °C ..... | $T \leq \text{max. time to trip (seconds)}$ |
| Hold Current .....   | 30 min. at $I_{hold}$ .....                  | No trip                                     |
| Trip Cycle Life..... | $V_{max}$ , $I_{max}$ , 100 cycles.....      | No arcing or burning                        |
| Trip Endurance ..... | $V_{max}$ , 48 hours.....                    | No arcing or burning                        |
| UL File Number ..... | E 174545S                                    |                                             |
| CSA File Number..... | CA 110338                                    |                                             |
| TÜV File Number..... | R2057213                                     |                                             |

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

## Additional Features

- Ability to withstand AC power cross conditions
- Assists equipment with meeting ITU-T K.20/K.21/K.45
- Assists equipment with meeting Telcordia GR-1089-C Intrabuilding

## MF-RX/250 Series - Telecom PTC Resettable Fuses

**BOURNS®**

### Thermal Derating Chart - $I_{hold}$ (Amps)

| Model        | Ambient Operating Temperature |        |       |       |       |       |       |       |       |
|--------------|-------------------------------|--------|-------|-------|-------|-------|-------|-------|-------|
|              | -40 °C                        | -20 °C | 0 °C  | 23 °C | 40 °C | 50 °C | 60 °C | 70 °C | 85 °C |
| MF-RX012/250 | 0.186                         | 0.165  | 0.143 | 0.120 | 0.099 | 0.088 | 0.077 | 0.066 | 0.050 |
| MF-RX014/250 | 0.225                         | 0.199  | 0.172 | 0.145 | 0.119 | 0.106 | 0.093 | 0.080 | 0.060 |
| MF-RX018/250 | 0.269                         | 0.240  | 0.211 | 0.180 | 0.153 | 0.138 | 0.123 | 0.109 | 0.087 |

$I_{trip}$  is approximately two times  $I_{hold}$ .


### Product Dimensions

| Model         | A<br>Max.       | B<br>Max.       | C<br>Nom.                    | D<br>Min.      | E<br>Max.      | Physical Characteristics |       |          |
|---------------|-----------------|-----------------|------------------------------|----------------|----------------|--------------------------|-------|----------|
|               |                 |                 |                              |                |                | Lead Dia.                | Style | Material |
| MF-RX012/250  | 6.5<br>(0.256)  | 11.0<br>(0.433) | 5.1 ± 0.7<br>(0.201 ± 0.028) | 4.7<br>(0.185) | 4.6<br>(0.181) | 0.65<br>(0.026)          | 1     | Sn/Cu    |
| MF-RX012/250U | 6.0<br>(0.236)  | 10.0<br>(0.394) | 5.1 ± 0.7<br>(0.201 ± 0.028) | 4.7<br>(0.185) | 3.8<br>(0.150) | 0.65<br>(0.026)          | 2     | Sn/Cu    |
| MF-RX014/250  | 6.5<br>(0.256)  | 11.0<br>(0.433) | 5.1 ± 0.7<br>(0.201 ± 0.028) | 4.7<br>(0.185) | 4.6<br>(0.181) | 0.65<br>(0.026)          | 1     | Sn/Cu    |
| MF-RX014/250U | 6.0<br>(0.236)  | 10.0<br>(0.394) | 5.1 ± 0.7<br>(0.201 ± 0.028) | 4.7<br>(0.185) | 3.8<br>(0.150) | 0.65<br>(0.026)          | 2     | Sn/Cu    |
| MF-RX018/250  | 11.0<br>(0.433) | 13.6<br>(0.535) | 5.1 ± 0.7<br>(0.201 ± 0.028) | 4.7<br>(0.185) | 4.6<br>(0.181) | 0.65<br>(0.026)          | 1     | Sn/Cu    |
| MF-RX018/250U | 10.4<br>(0.409) | 12.6<br>(0.496) | 5.1 ± 0.7<br>(0.201 ± 0.028) | 4.7<br>(0.185) | 3.8<br>(0.150) | 0.65<br>(0.026)          | 2     | Sn/Cu    |


Packaging options: BULK: 500 pcs. per bag. TAPE & REEL: 1500 pcs. per reel (available binned).

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

Style 1

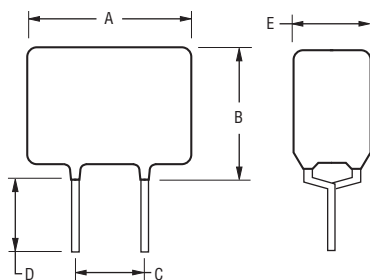


Style 2

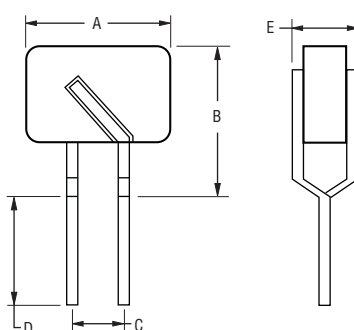

### Typical Part Marking

Represents total content. Layout may vary.

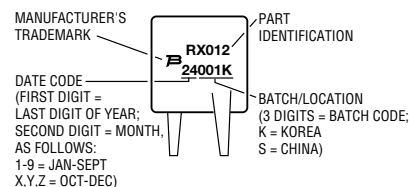

NOTE: UNCOATED PARTS HAVE NO PART MARKING. MARKING IS ON LABEL ONLY.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# MF-RX/250 Series - Telecom PTC Resettable Fuses

**BOURNS®**


## How to Order

**MF - RX 012/250 U - A 5 - 2**

Multifuse®  
Product Designator  
Series  
RX = Radial Leaded Component  
Hold Current,  $I_{hold}$   
008-018 (0.08-0.18 Amps)  
Max. Interrupt Voltage, V  
250 (250 Volts)  
Telecom Options  
U = Uncoated (radial parts only)  
Resistance Sorted  
Narrow resistance ranges - see Resistance Options chart  
Resistance Bins of 0.5 ohms  
05 = 0.5 ohm binned parts (epoxy coated)  
5 = 0.5 ohm binned parts (uncoated)  
Packaging Options  
- 0 = Bulk Packaging  
- 2 = Tape and Reel\* (available with binned option)

\*Packaged per EIA486-B

## Typical Time to Trip at 23 °C

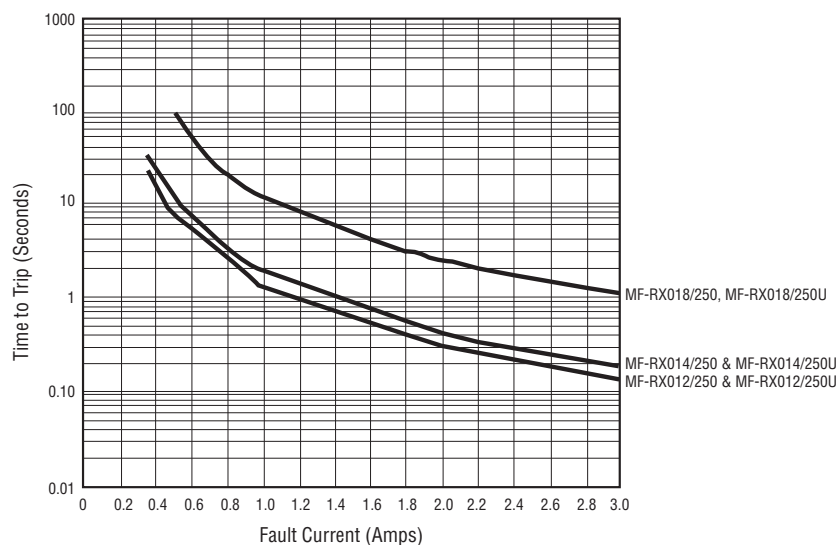

## Resistance Options

| Model            | Initial Resistance Values |      | R1max         | Bin |
|------------------|---------------------------|------|---------------|-----|
|                  | Ohms @ 23 ° C             |      | Ohms @ 23 ° C |     |
|                  | Min.                      | Max. | Max.          |     |
| MF-RX012/250     | 4.0                       | 8.0  | 16.0          | 0.5 |
| MF-RX012/250-A05 | 7.0                       | 9.0  | 16.0          | 0.5 |
| MF-RX012/250-C05 | 5.5                       | 7.5  | 14.0          | 0.5 |
| MF-RX012/250-F05 | 6.0                       | 10.5 | 16.0          | 0.5 |
| MF-RX012/250-105 | 6.0                       | 9.0  | 16.0          | 0.5 |
| MF-RX012/250-205 | 8.0                       | 10.5 | 16.0          | 0.5 |
| MF-RX012/250-T05 | 7.0                       | 12.0 | 16.0          | 0.5 |
| MF-RX012/250U    | 6.0                       | 10.0 | 16.0          | 0.5 |
| MF-RX014/250     | 3.0                       | 6.0  | 14.0          | 0.5 |
| MF-RX014/250-A05 | 3.0                       | 5.5  | 12.0          | 0.5 |
| MF-RX014/250-B05 | 4.5                       | 6.0  | 14.0          | 0.5 |
| MF-RX014/250U    | 3.5                       | 6.5  | 12.0          | 0.5 |

MF-RX/250, REV. K, 04/14

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# MF-RX/250 Series Tape and Reel Specifications

**BOURNS®**

Devices taped using EIA468–B/IEC286-2 standards. See table below and Figures 1 through 4 for details.

| Dimension Description                             | IEC Mark   | EIA Mark   | Dimensions                                                     |                                    |
|---------------------------------------------------|------------|------------|----------------------------------------------------------------|------------------------------------|
|                                                   |            |            | Dimensions                                                     | Tolerance                          |
| Carrier tape width                                | $W$        | $W$        | $\frac{18}{(.709)}$                                            | $\frac{-0.5/+1.0}{(-0.02/+0.039)}$ |
| Hold down tape width                              | $W_0$      | $W_4$      | $\frac{11}{(.433)}$                                            | min.                               |
| Hold down tape                                    |            |            | No protrusion                                                  |                                    |
| Top distance between tape edges                   | $W_2$      | $W_6$      | $\frac{3}{(.118)}$                                             | max.                               |
| Sprocket hole position                            | $W_1$      | $W_5$      | $\frac{9}{(.354)}$                                             | $\frac{-0.5/+0.75}{(-0.02/+0.03)}$ |
| Sprocket hole diameter                            | $D_0$      | $D_0$      | $\frac{4}{(.157)}$                                             | $\frac{\pm 0.2}{(\pm .0078)}$      |
| Abscissa to plane (straight lead)                 | $H$        | $H$        | $\frac{18.5}{(.728)}$                                          | $\frac{\pm 3.0}{(\pm .118)}$       |
| Abscissa to plane (kinked lead)                   | $H_0$      | $H_0$      | $\frac{16}{(.63)}$                                             | $\frac{\pm 0.5}{(\pm .02)}$        |
| Abscissa to top (straight lead)                   | $H_1$      | $H_1$      | $\frac{38.0}{(1.496)}$                                         | max.                               |
| Abscissa to top (kinked lead)                     | $H_1$      | $H_1$      | $\frac{32.2}{(1.268)}$                                         | max.                               |
| Overall width w/lead protrusion (straight lead)   |            | $C_1$      | $\frac{55.0}{(2.165)}$                                         | max.                               |
| Overall width w/lead protrusion (kinked lead)     |            | $C_1$      | $\frac{43.2}{(1.7)}$                                           | max.                               |
| Overall width w/o lead protrusion (straight lead) |            | $C_2$      | $\frac{54.0}{(2.126)}$                                         | max.                               |
| Overall width w/o lead protrusion (kinked lead)   |            | $C_2$      | $\frac{42.5}{(1.673)}$                                         | max.                               |
| Protrusion of cutout                              | $L$        | $L$        | $\frac{11}{(.433)}$                                            | max.                               |
| Sprocket hole pitch                               | $P_0$      | $P_0$      | $\frac{12.7}{(0.5)}$                                           | $\frac{\pm 0.3}{(\pm .012)}$       |
| Pitch tolerance                                   |            |            | 20 consecutive                                                 | $\frac{\pm 1}{(\pm .039)}$         |
| Device pitch                                      |            |            | $\frac{12.7}{(0.5)}$                                           | $\frac{\pm 0.3}{(\pm .012)}$       |
| Tape thickness                                    | $t$        | $t$        | $\frac{0.9}{(.035)}$                                           | max.                               |
| Tape thickness with splice                        |            | $t_1$      | $\frac{1.5}{(.059)}$                                           | max.                               |
| Splice sprocket hole alignment                    |            |            | 0                                                              | $\frac{\pm 0.3}{(\pm .012)}$       |
| Body lateral deviation                            | $\Delta_h$ | $\Delta_h$ | 0                                                              | $\frac{\pm 1.0}{(\pm .039)}$       |
| Body tape plane deviation                         | $\Delta_p$ | $\Delta_p$ | 0                                                              | $\frac{\pm 1.3}{(\pm .051)}$       |
| Lead spacing                                      | $F$        | $F$        | $\frac{5.08}{(0.2)}$                                           | $\frac{-0.5/+0.6}{(-.020/+0.024)}$ |
| Reel width                                        | $w$        | $W_2$      | $\frac{56.0}{(2.205)}$                                         | max.                               |
| Reel diameter                                     | $d$        | $a$        | $\frac{370.0}{(14.57)}$                                        | max.                               |
| Space between flanges less device                 | $W_1$      | $h$        | $\frac{4.75}{(.187)}$                                          | $\frac{\pm 3.25}{(\pm .128)}$      |
| Arbor hole diameter                               | $f$        | $c$        | $\frac{26.0}{(1.024)}$                                         | $\frac{\pm 12.0}{(\pm .472)}$      |
| Core diameter                                     | $h$        | $n$        | $\frac{91}{(3.58)}$                                            | max.                               |
| Box                                               |            |            | $\frac{67}{(2.64)}$ $\frac{372}{(14.6)}$ $\frac{362}{(14.25)}$ | max.                               |
| Consecutive missing places                        |            |            | none                                                           |                                    |
| Empty places per reel                             |            |            | 0.1 %                                                          |                                    |

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.


# MF-RX/250 Series Tape and Reel Specifications

**BOURNS®**

**Taped Component Dimensions -  
Figure 1**

**Applies to Models:**


|               |
|---------------|
| MF-RX012/250U |
| MF-RX014/250U |
| MF-RX018/250  |
| MF-RX018/250U |

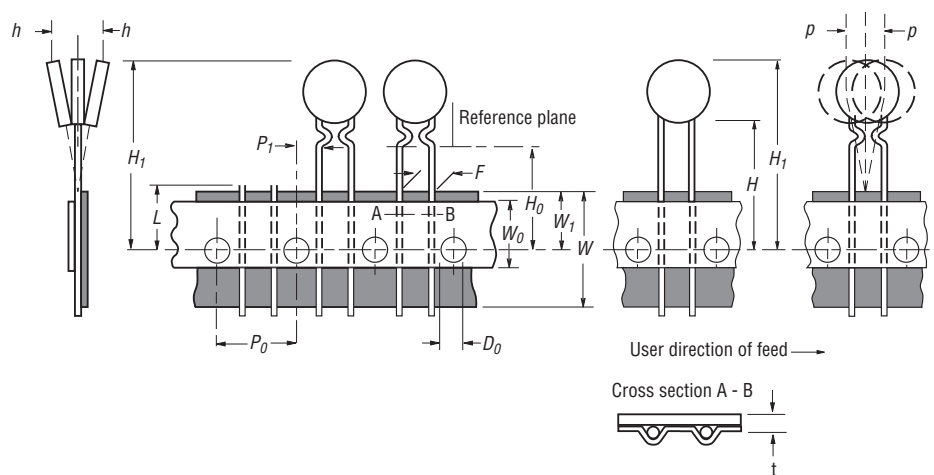

**Reel Dimensions -  
Figure 2**

**Applies to Models:**

|               |
|---------------|
| MF-RX012/250U |
| MF-RX014/250U |
| MF-RX018/250  |
| MF-RX018/250U |

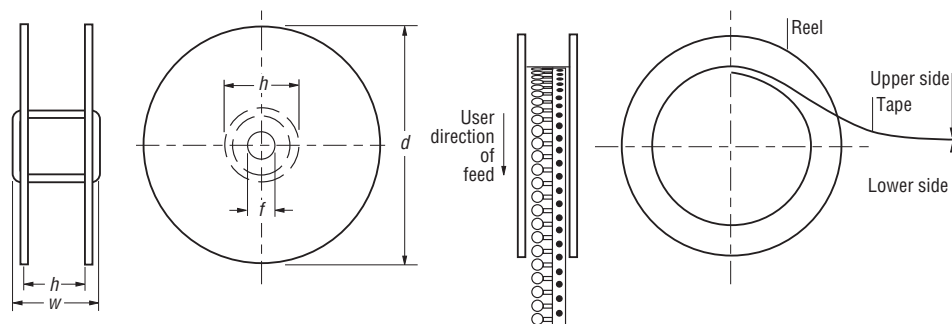

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

# MF-RX/250 Series Tape and Reel Specifications


**BOURNS®**

**Taped Component Dimensions -  
Figure 3**

**Applies to Models:**

MF-RX012/250  
MF-RX012/250-A  
MF-RX012/250-C  
MF-RX012/250-F  
MF-RX012/250-1  
MF-RX012/250-2  
MF-RX012/250-T

MF-RX014/250  
MF-RX014/250-A  
MF-RX014/250-B  
MF-RX014-250-T

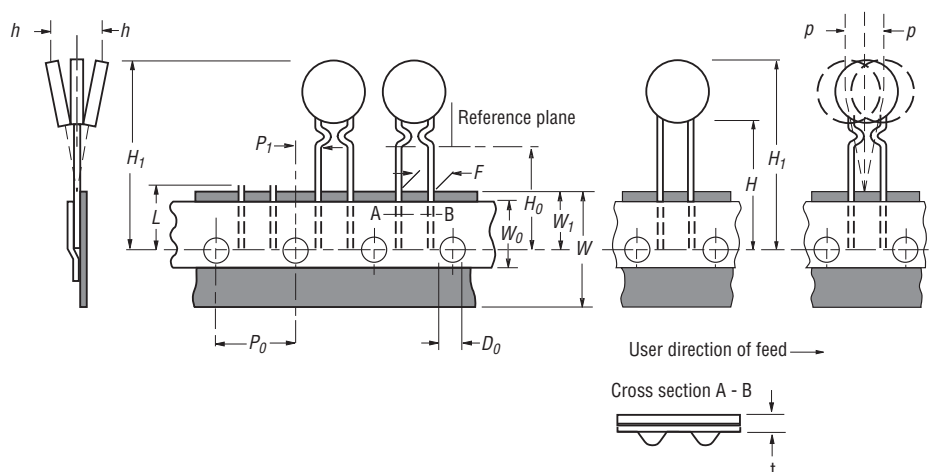


**Reel Dimensions -  
Figure 4**

**Applies to Models:**

MF-RX012/250  
MF-RX012/250-A  
MF-RX012/250-C  
MF-RX012/250-F  
MF-RX012/250-1  
MF-RX012/250-2  
MF-RX012/250-T

MF-RX014/250  
MF-RX014/250-A  
MF-RX014/250-B  
MF-RX014-250-T

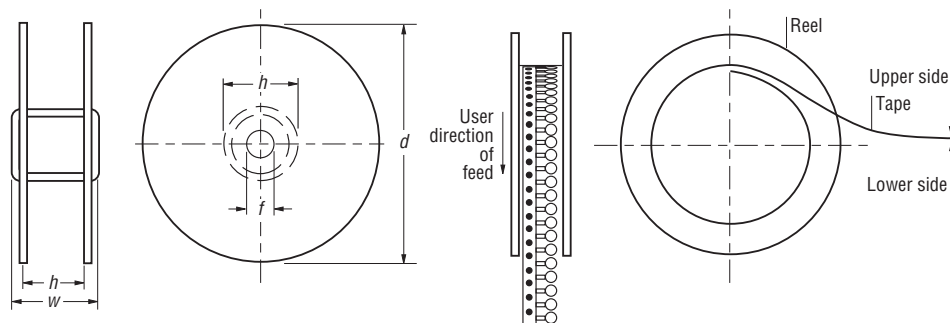

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$