


ROHS COMPLIANT

PRODUCT DATA DRAWING



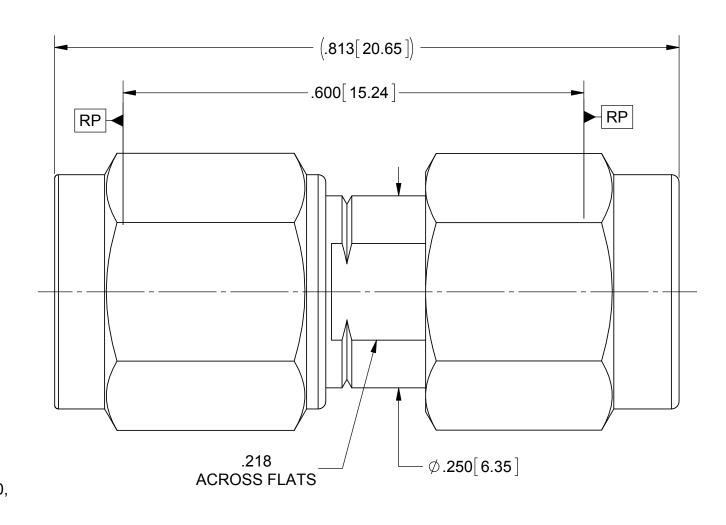

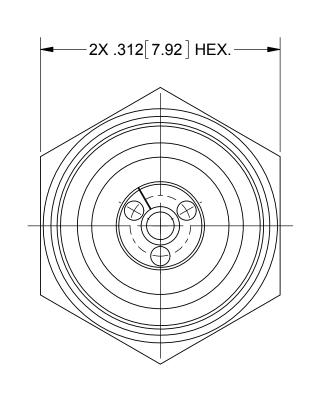

MATERIAL:

BODY &

COUPLING NUTS:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

CONTACT & LOCK RINGS:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04

INSULATOR: ULTEM 1000

GASKETS:

SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 60/70

FINISH:

BODY &

COUPLING NUTS: PASSIVATED PER AMS-2700

CONTACT:

GOLD PER ASTM B488, TYPE II,

CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE:

VSWR:

DC TO 40.0 GHz.

1.25:1 MAX. DC TO 40.0 GHz.

UNLESS OTHERWISE SPECIFIED

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES
SURFACE AR	REA: N/A
	PROPRIETARY
IS THE SOLE P ANY REPRODU WITHOUT THE	TION CONTAINED IN THIS DRAW PROPERTY OF SV MICROWAVE, JCTION IN PART OR AS A WHOL WRITTEN PERMISSION OF /E, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010
.XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD

AL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' X ±.030 .XX ±.010 .XXX ±.010 .XXX ±.005 T DIMENSIONS AND TOLERANCES Y14.5M - 1994	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING 3) BREAK CORNERS & EDGES 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
ANGLE PROJECTION	DRAWN:	FED 10/05/15
	CHECKED:	STW 10/05/15
\\ \tilde{\tilie}\tilde{\tilde{\tilde{\tilde{\tilde{\tilde{\tilde{\tilde	APPROVED:	STW 10/05/15

MICROWAVE
2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

2.4mm PLUG TO SVK PLUG STRAIGHT ADAPTER

-	95077	DWG. NO.	SF1116	-6007
S	CALE: 8:1			SHEET 1 OF