


1

2

3

4

5

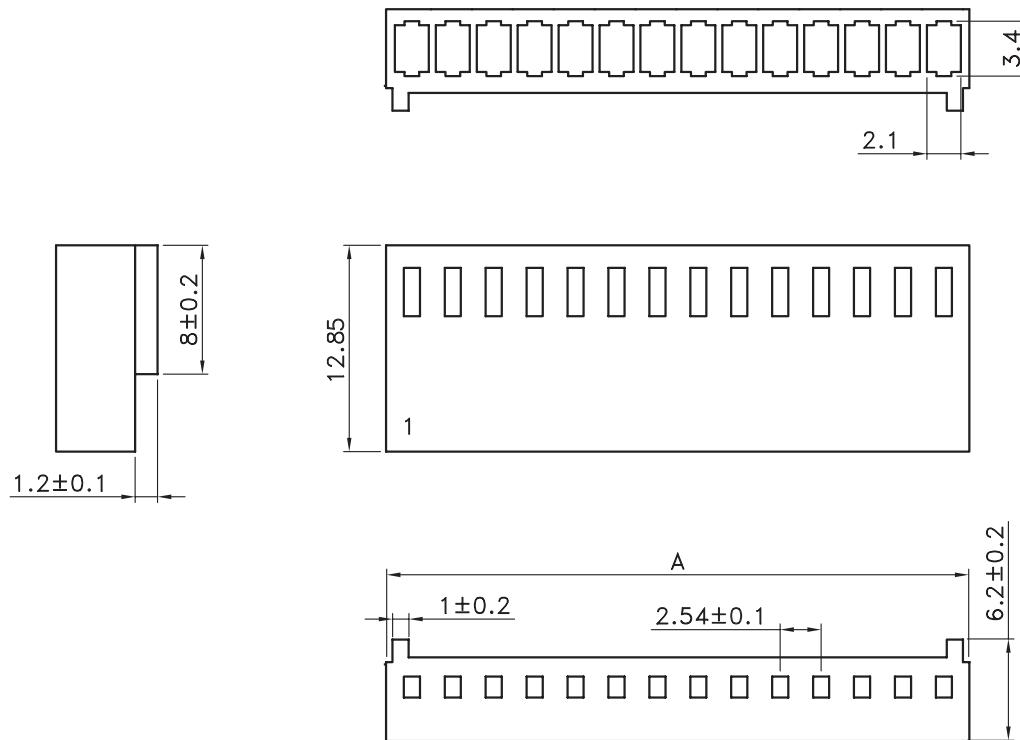

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: NYLON 66
 FLAMABILITY RATING: UL94-V0
 COLOR: BEIGE
 PITCH: 2.54 MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105°C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC/MN

STANDARD
 CERTIFIED: E323964

PACKAGING
 BAG

DIMENSION

PINS	A
2	5.60
3	8.10
4	10.70
5	13.20
6	15.80
8	20.90
10	25.90
12	31.00
14	36.10

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

 $.X = +/_ 0.2$ $.XX = +/_ 0.15$ 

J

29-SEP-17

TPK

AK

I

12-SEP-16

DRAWING

AK

H

19-JAN-16

TPK

AK

REV

DATE

FILE

BY

APPROVAL: BBu

UNIT: MM

SCALE:

SHEET: 1/3

DRAW: PEARL

DESCRIPTION: 2.54 MM FEMALE TERMINAL HOUSING

WERI PART NO: 619 0xx 116 21

SIZE

A4


1

2


3

4

5



PE BAG





Note:

1. Dimension:

Carton Size: 40*28*28(cm)

Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton
2	1000	38000	7	1000	12000
3	1000	24000	8	1000	10000
4	1000	20000	9	1000	10000
5	1000	16000	10	1000	7000
6	1000	12000	12	1000	5000

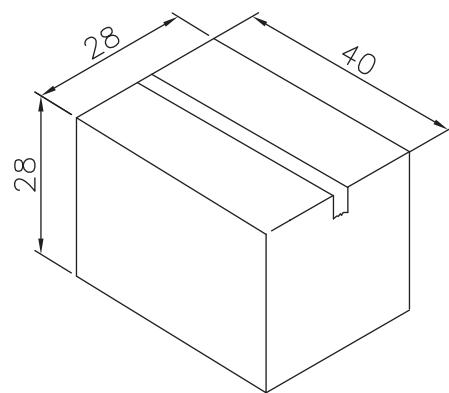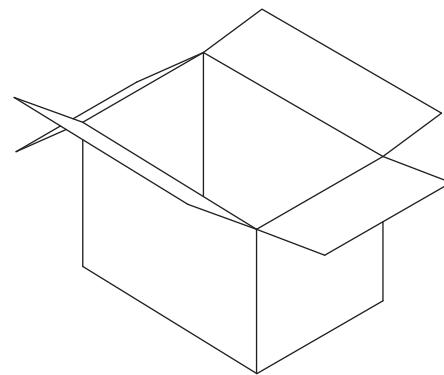

Carton

RoHS Compliant			
G			
F			
E			
D			
C			
B			
A			
REV	DATE	FILE	BY



PROJECTION:

GENERAL TOLERANCE
 $.X = \pm 0.2$
 $.XX = \pm 0.15$

APPROVAL: BBu



WF
 WÜRTH ELEKTRONIK

UNIT: MM	DESCRIPTION: 2.54 MM FEMALE TERMINAL HOUSING	SIZE
SCALE:		
SHEET: 2/3	WERI PART NO: 619 0xx 116 21	
DRAW: PEARL		

A

B

C

D

A4

1

2

3

4

5

Cautions and Warnings:

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

RoHS Compliant			
G			
F			
E			
D			
C			
B			
A	10-SEP-14	PDF	QL
REV	DATE	FILE	BY



PROJECTION:

GENERAL TOLERANCE
 $.X = +/_ 0.2$
 $.XX = +/_ 0.15$



APPROVAL: JC

UNIT: MM
SCALE:
SHEET: 3/3
DRAW: QL

DESCRIPTION: DISCLAIMER
WERI PART NO: DISCLAIMER

SIZE
A4