

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREDERICK, MINNESOTA

FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING

15LS1

15LS1

M

DRAWING
NUMBER

X 6

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

X 3

REPLACES

RELEASE NO. SR 9245

CHECK 27 SEP 60

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK








CHECK

CHECK

CHECK

CHECK

CHECK

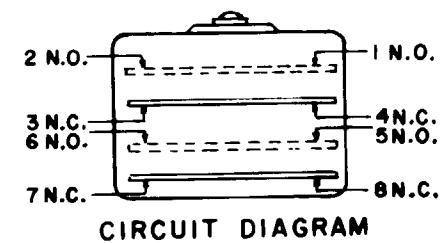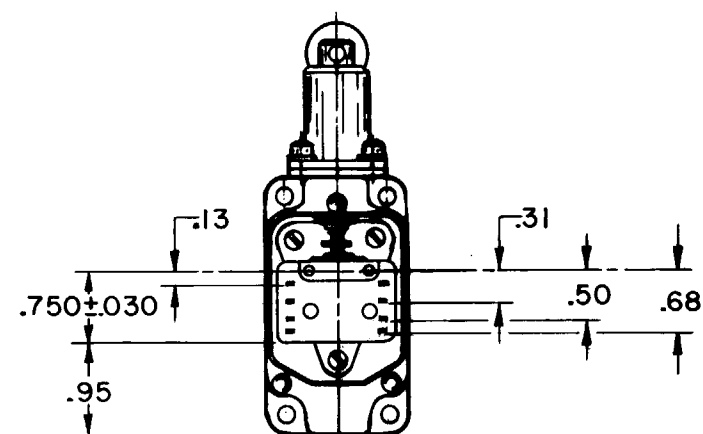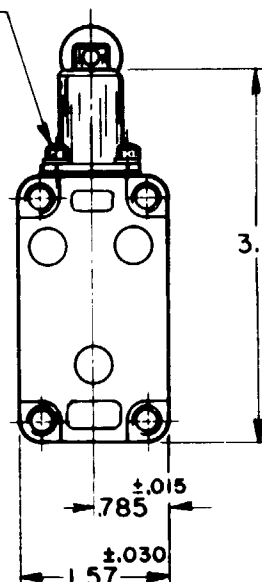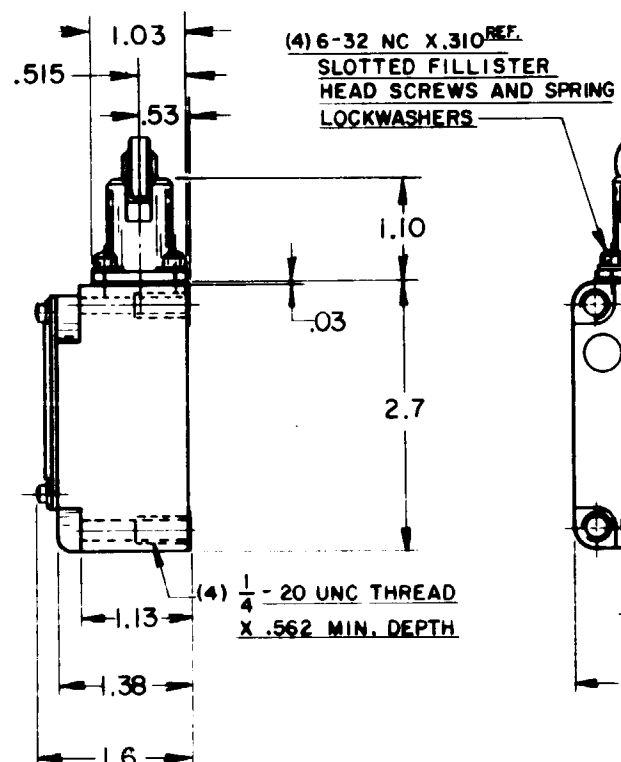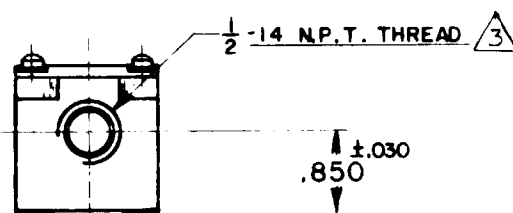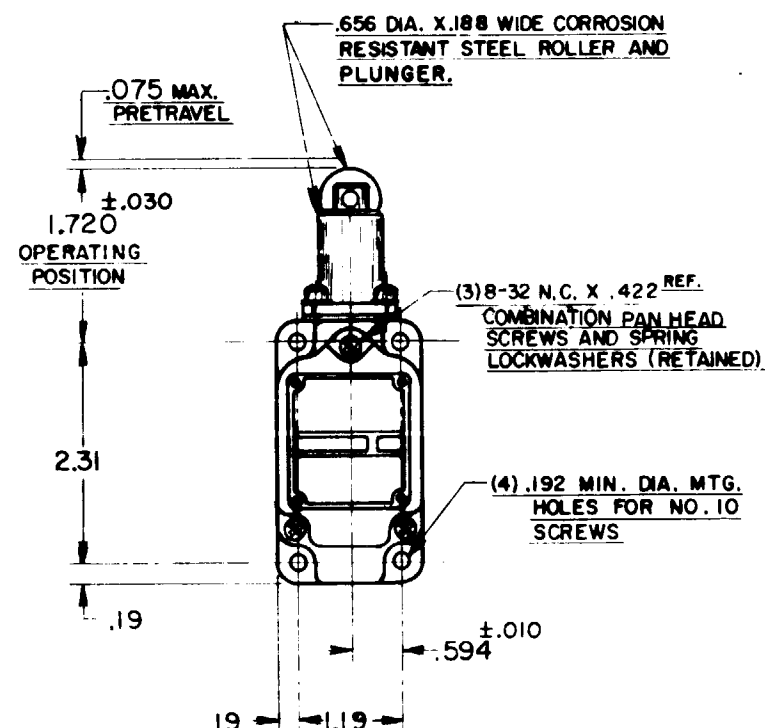

NOTES:

- 1 - ROLLER ASSEMBLY MAY BE RE-ASSEMBLED 90° FROM POSITION SHOWN
- 2 - IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT
- 3 - SEAL FURNISHED BY USER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING FORCE - - - - - (C) 7 LB MAX	CONTACT ARRANGEMENT	DO NOT SCALE PRINT
RELEASE FORCE - - - - - 2 LB MIN	(SEE CIRCUIT DIAGRAM)	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL - - - - - .045 MAX	(B) 10 A-125 OR 250 VAC	TOLERANCES ARE:
OVERTRAVEL - - - - - .219 MIN	1/2 HP-125 VAC	ONE PLACE (.0) ±.030
RELEASE TRAVEL - - - - - .015 MIN	(A)	TWO PLACE (.00) ±.015
SWITCH-BASIC REPLACEMENT - - - 8 AS42		THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT