

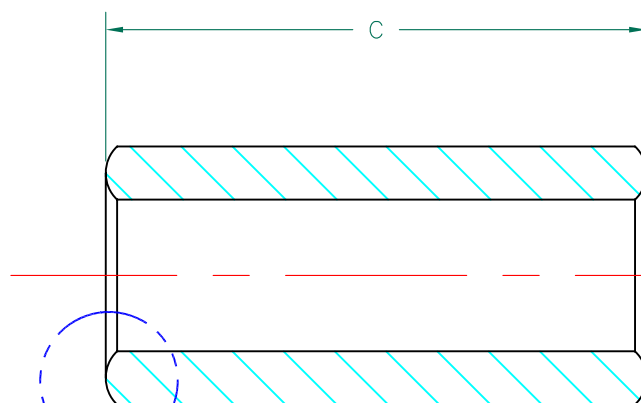


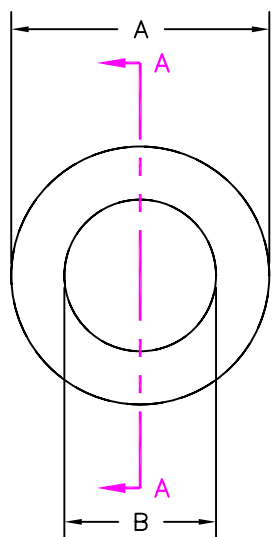

SEE
DETAIL "A"

SECTION A-A

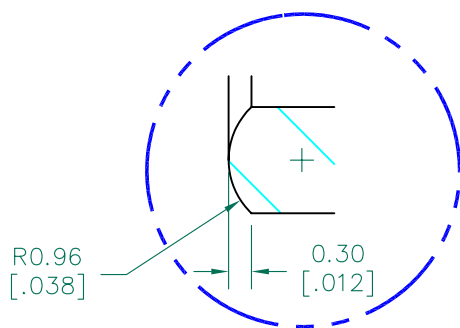


DETAIL "A"
SCALE: 10:1
(TYPICAL)

**UNCONTROLLED
DOCUMENT**

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	65 Ω	138 Ω	260 Ω
Minimum	- Ω	110 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

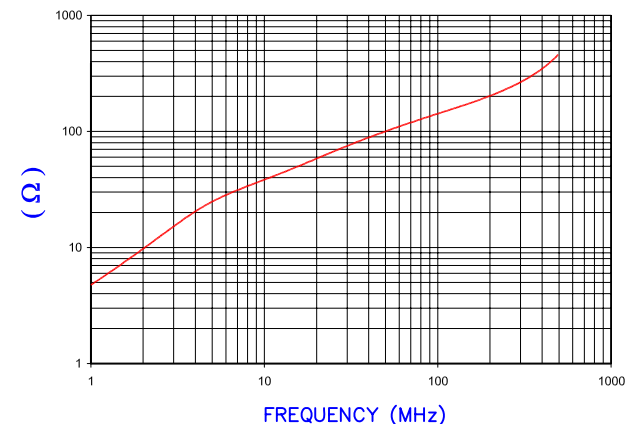

AGILENT E4991A Impedance/Material Analyzer
HP 16092A Test Fixture

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	6.78 [.267]	±	0.15 [.006]
B	3.99 [.157]	±	0.13 [.005]
C	14.22 [.560]	±	0.25 [.010]

WEIGHT/1000 1.64 kgs [3.62 Lbs]

SCALE DRAWING 1:1



28B0268-000

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
H	UPDATE COMPANY LOGO	06/11/10	JUN	PROJECT/PART NUMBER: 28B0268-000			
G	CHANGE END PROFILE UPDATE PRINT FORMAT AND COMPANY LOGO	10/22/07	TMB				
F	REM COATING SPEC CHG P/N FROM 00* ADD Z CURVE ADJUST Z VALUES UPDATE PRINT FORMAT	02/17/03	JRK				
E	ADDED DETAIL "A" & UPDATE FORMAT	08/28/01	JRK				
D	CHG P/N TO 28B0268-00*, ADD COATING SPECS	03/26/99	I.S.				
C	DEL. PART PROFILE	01/19/98	I.S.	DATE: 11/22/94		SCALE: 4 : 1	
B	UPDATED P/N FOR NEW CATALOG	11/22/94	JBE	CAD # 28B0268-000-H		TOOL # B0268	
						MATERIAL: FERRITE	

Laird
TECHNOLOGIES®

REV **H** PART TYPE: **FERRITE CORE** DRAWN BY: **JBE**