

Surface Mount Type

Series: **FC** Type : **V**
FC High temperature Lead-Free reflow(suffix:A*)

Country of Origin
 Japan
 Malaysia



- **Features** Endurance : 105°C 1000 h, 5.4mm height(≤ φ6.3)
 Low impedance (1/2 for HA series)
 Vibration-proof product is available upon request.(φ8 ≤)
 RoHS directive compliant

■ Specifications

Category temp. range	-40 to +105°C							
Rated W.V. Range	6.3 to 50 V .DC							
Nominal Cap. Range	1 to 1500 μ F							
Capacitance Tolerance	±20 % (120Hz/+20°C)							
DC Leakage Current	I ≤ 0.01 CV or 3(μ A) after 2 minutes (Whichever is greater)							
tan δ	Please see the attached standard products lists							
Characteristics at Low Temperature	W.V. (V)	6.3	10	16	25	35	50	(Impedance ratio at 120 Hz)
	-25 / +20 °C	2	2	2	2	2	2	
	-40 / +20 °C	3	3	3	3	3	3	
Endurance	After applying rated working voltage for 1000 hours at +105±2°C and then being stabilized at +20°C, capacitors shall meet the following limits.							
	Capacitance change		±20% of initial measured value					
	tan δ		≤ 200 % of initial specified value					
	DC leakage current		≤ initial specified value					
Shelf Life	After storage for 1000 hours at +105±2°C with no voltage applied and then being stabilized at +20°C, capacitors shall meet the limits specified in Endurance.(With voltage treatment)							
Resistance to Soldering Heat	After reflow soldering and then being stabilized at +20°C, capacitor shall meet the following limits.							
	Capacitance change		±10% of initial measured value					
	tan δ		≤ initial specified value					
	DC leakage current		≤ initial specified value					

■ Marking

Example: 35V 1 μF (Polarized)

Lead-Free products

W.V. code

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

■ Dimensions in mm (not to scale)

E, F, G = L±0.3

Size code	D	L	A, B	H	I	W	P	K
B	4.0	5.4	4.3	5.5MAX	1.8	0.65±0.1	1.0	0.35 -0.20 to +0.15
C	5.0	5.4	5.3	6.5MAX	2.2	0.65±0.1	1.5	0.35 -0.20 to +0.15
D	6.3	5.4	6.6	7.8MAX	2.6	0.65±0.1	1.8	0.35 -0.20 to +0.15
E	8.0	6.2	8.3	9.5MAX	3.4	0.65±0.1	2.2	0.35 -0.20 to +0.15
F	8.0	10.2	8.3	10.0MAX	3.4	0.90±0.2	3.1	0.70 ±0.2
G	10.0	10.2	10.3	12.0MAX	3.5	0.90±0.2	4.6	0.70 ±0.2

■ Case size

Cap. (μF)	W.V.(V)	6.3 (0J)	10 (1A)	16 (1C)	25 (1E)	35 (1V)	50(1H)
1 to 3.3						B*	B
4.7						B*	C
6.8					B*	C*	
10				B*		C*	D
22		B*		C*	D*	D*	E
33			C*		D*	E*	F
47		C*		D*	E*	E*	G
68		D*		E*	F*		
100		D*	E*	E*	F*	G*	G
150			E*				
220		E*	F*	G*	G*	G*	G
330		F*		G*	G*	G*	
470			G*	G*	G*		
680				G*			
1000		G*	G*				
1500		G*					

■ Impedance (Ω) (100kHz/+20°C) (6.3 to 35W.V)

Size Code	B	C	D	E	F	G
Impedance	3.0	1.8	1.0	0.4	0.3	0.15

(50W.V)

Size Code	B	C	D	E	F	G
Impedance	5.0	3.0	2.0	0.7	0.6	0.3

* High temperature Lead-Free products are available.
 (AR or AP. See P/N list)

Design, and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and / or use. Should a safety concern arise regarding this product, please be sure to contact us immediately. Mar. 2006

■ Standard Products

Endurance : 105°C 1000h

W.V. (V)	Cap. (±20%) (μF)	Case size			Specification			Part No. (RoHS:compliant)	Min. Packaging Q'ty
		Dia. (mm)	Length (mm)	Size Code	Ripple current (100kHz) (+105°C) (mA)	tan δ (120Hz) (+20°C)	Impe- dance (100kHz) (+20°C) (Ω)		Reflow Taping (pcs)
6.3	22	4	5.4	B	60	0.26	3.00	EEEF0J220R	(1) 2000
	47	5	5.4	C	95	0.26	1.80	EEEF0J470R	(1) 1000
	68	6.3	5.4	D	140	0.26	1.00	EEEF0J680P	(1) 1000
	100	6.3	5.4	D	140	0.26	1.00	EEEF0J101P	(1) 1000
	220	8	6.2	E	230	0.26	0.40	EEEF0J221P	(2) 1000
	330	8	10.2	F	450	0.26	0.30	EEEF0J331P	(2) 500
	1000	10	10.2	G	670	0.26	0.15	EEEF0J102P	(2) 500
	1500	10	10.2	G	670	0.26	0.15	EEEF0J152P	(2) 500
10	33	5	5.4	C	95	0.19	1.80	EEEF1A330R	(1) 1000
	100	8	6.2	E	230	0.19	0.40	EEEF1A101P	(2) 1000
	150	8	6.2	E	230	0.19	0.40	EEEF1A151P	(2) 1000
	220	8	10.2	F	450	0.19	0.30	EEEF1A221P	(2) 500
	470	10	10.2	G	670	0.19	0.15	EEEF1A471P	(2) 500
	1000	10	10.2	G	670	0.19	0.15	EEEF1A102P	(2) 500
16	10	4	5.4	B	60	0.16	3.00	EEEF1C100R	(1) 2000
	22	5	5.4	C	95	0.16	1.80	EEEF1C220R	(1) 1000
	47	6.3	5.4	D	140	0.16	1.00	EEEF1C470P	(1) 1000
	68	8	6.2	E	230	0.16	0.40	EEEF1C680P	(2) 1000
	100	8	6.2	E	230	0.16	0.40	EEEF1C101P	(2) 1000
	220	10	10.2	G	670	0.16	0.15	EEEF1C221P	(2) 500
	330	10	10.2	G	670	0.16	0.15	EEEF1C331P	(2) 500
	470	10	10.2	G	670	0.16	0.15	EEEF1C471P	(2) 500
	680	10	10.2	G	670	0.16	0.15	EEEF1C681P	(2) 500
25	6.8	4	5.4	B	60	0.14	3.00	EEEF1E68R	(1) 2000
	22	6.3	5.4	D	140	0.14	1.00	EEEF1E220P	(1) 1000
	33	6.3	5.4	D	140	0.14	1.00	EEEF1E330P	(1) 1000
	47	8	6.2	E	230	0.14	0.40	EEEF1E470P	(2) 1000
	68	8	10.2	F	450	0.14	0.30	EEEF1E680P	(2) 500
	100	8	10.2	F	450	0.14	0.30	EEEF1E101P	(2) 500
	220	10	10.2	G	670	0.14	0.15	EEEF1E221P	(2) 500
	330	10	10.2	G	670	0.14	0.15	EEEF1E331P	(2) 500
	470	10	10.2	G	670	0.14	0.15	EEEF1E471P	(2) 500
35	1	4	5.4	B	60	0.12	3.00	EEEF1V1R0R	(1) 2000
	2.2	4	5.4	B	60	0.12	3.00	EEEF1V2R2R	(1) 2000
	3.3	4	5.4	B	60	0.12	3.00	EEEF1V3R3R	(1) 2000
	4.7	4	5.4	B	60	0.12	3.00	EEEF1V4R7R	(1) 2000
	6.8	5	5.4	C	95	0.12	1.80	EEEF1V6R8R	(1) 1000
	10	5	5.4	C	95	0.12	1.80	EEEF1V100R	(1) 1000
	22	6.3	5.4	D	140	0.12	1.00	EEEF1V220P	(1) 1000
	33	8	6.2	E	230	0.12	0.40	EEEF1V330P	(2) 1000
	47	8	6.2	E	230	0.12	0.40	EEEF1V470P	(2) 1000
	100	10	10.2	G	670	0.12	0.15	EEEF1V101P	(2) 500
	220	10	10.2	G	670	0.12	0.15	EEEF1V221P	(2) 500

The taping dimensions are explained on p.195 of our Catalog.

Please use it as a reference guide.

Reflow Profile(Fig-1 to Fig-6) listed on last page of our Catalog.

Design, and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and / or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Mar. 2006

■ Standard Products

Endurance : 105°C 1000h

W.V. (V)	Cap. (±20%) (μF)	Case size			Specification			Part No. (RoHS:compliant)	Min. Packaging Q'ty
		Dia. (mm)	Length (mm)	Size Code	Ripple current (100kHz) (+105°C) (mA)	tan δ (120Hz) (+20°C)	Impe- dance (100kHz) (+20°C) (Ω)		
35	330	10	10.2	G	670	0.12	0.15	EEEF1V331P	(2) 500
50	1	4	5.4	B	30	0.12	5.00	EEEF1H1R0R	(1) 2000
	2.2	4	5.4	B	30	0.12	5.00	EEEF1H2R2R	(1) 2000
	3.3	4	5.4	B	30	0.12	5.00	EEEF1H3R3R	(1) 2000
	4.7	5	5.4	C	50	0.12	3.00	EEEF1H4R7R	(1) 1000
	10	6.3	5.4	D	70	0.12	2.00	EEEF1H100P	(1) 1000
	22	8	6.2	E	120	0.12	0.70	EEEF1H220P	(2) 1000
	33	8	10.2	F	300	0.12	0.60	EEEF1H330P	(2) 500
	47	10	10.2	G	500	0.12	0.30	EEEF1H470P	(2) 500
	100	10	10.2	G	500	0.12	0.30	EEEF1H101P	(2) 500
	220	10	10.2	G	500	0.12	0.30	EEEF1H221P	(2) 500

The taping dimensions are explained on p.195 of our Catalog.

Please use it as a reference guide.

Reflow Profile(Fig-1 to Fig-6) listed on last page of our Catalog.

■ High temperature Lead-Free reflow products

Endurance: 105°C 1000h


W.V. (V)	Cap. ($\pm 20\%$) (μF)	Case size			Specification			Part No. (RoHS:compliant)	Min. Packaging Q'ty
		Dia. (mm)	Length (mm)	Size Code	Ripple current (100kHz) (+105°C) (mA)	$\tan \delta$ (120Hz) (+20°C)	Impe- dance (100kHz) (+20°C) (Ω)		
6.3	22	4	5.4	B	60	0.26	3.00	EEEF0C0J220AR	(5) 2000
	47	5	5.4	C	95	0.26	1.80	EEEF0C0J470AR	(5) 1000
	68	6.3	5.4	D	140	0.26	1.00	EEEF0C0J680AP	(5) 1000
	100	6.3	5.4	D	140	0.26	1.00	EEEF0C0J101AP	(5) 1000
	220	8	6.2	E	230	0.26	0.40	EEEF0C0J221AP	(6) 1000
	330	8	10.2	F	450	0.26	0.30	EEEF0C0J331AP	(6) 500
	1000	10	10.2	G	670	0.26	0.15	EEEF0C0J102AP	(6) 500
	1500	10	10.2	G	670	0.26	0.15	EEEF0C0J152AP	(6) 500
10	33	5	5.4	C	95	0.19	1.80	EEEF0C1A330AR	(5) 1000
	100	8	6.2	E	230	0.19	0.40	EEEF0C1A101AP	(6) 1000
	150	8	6.2	E	230	0.19	0.40	EEEF0C1A151AP	(6) 1000
	220	8	10.2	F	450	0.19	0.30	EEEF0C1A221AP	(6) 500
	470	10	10.2	G	670	0.19	0.15	EEEF0C1A471AP	(6) 500
	1000	10	10.2	G	670	0.19	0.15	EEEF0C1A102AP	(6) 500
16	10	4	5.4	B	60	0.16	3.00	EEEF0C1C100AR	(5) 2000
	22	5	5.4	C	95	0.16	1.80	EEEF0C1C220AR	(5) 1000
	47	6.3	5.4	D	140	0.16	1.00	EEEF0C1C470AP	(5) 1000
	68	8	6.2	E	230	0.16	0.40	EEEF0C1C680AP	(6) 1000
	100	8	6.2	E	230	0.16	0.40	EEEF0C1C101AP	(6) 1000
	220	10	10.2	G	670	0.16	0.15	EEEF0C1C221AP	(6) 500
	330	10	10.2	G	670	0.16	0.15	EEEF0C1C331AP	(6) 500
	470	10	10.2	G	670	0.16	0.15	EEEF0C1C471AP	(6) 500
25	6.8	4	5.4	B	60	0.14	3.00	EEEF0C1E6R8AR	(5) 2000
	22	6.3	5.4	D	140	0.14	1.00	EEEF0C1E220AP	(5) 1000
	33	6.3	5.4	D	140	0.14	1.00	EEEF0C1E330AP	(5) 1000
	47	8	6.2	E	230	0.14	0.40	EEEF0C1E470AP	(6) 1000
	68	8	10.2	F	450	0.14	0.30	EEEF0C1E680AP	(6) 500
	100	8	10.2	F	450	0.14	0.30	EEEF0C1E101AP	(6) 500
	220	10	10.2	G	670	0.14	0.15	EEEF0C1E221AP	(6) 500
	330	10	10.2	G	670	0.14	0.15	EEEF0C1E331AP	(6) 500
35	470	10	10.2	G	670	0.14	0.15	EEEF0C1E471AP	(6) 500
	1	4	5.4	B	60	0.12	3.00	EEEF0C1V1R0AR	(5) 2000
	2.2	4	5.4	B	60	0.12	3.00	EEEF0C1V2R2AR	(5) 2000
	3.3	4	5.4	B	60	0.12	3.00	EEEF0C1V3R3AR	(5) 2000
	4.7	4	5.4	B	60	0.12	3.00	EEEF0C1V4R7AR	(5) 2000
	6.8	5	5.4	C	95	0.12	1.80	EEEF0C1V6R8AR	(5) 1000
	10	5	5.4	C	95	0.12	1.80	EEEF0C1V100AR	(5) 1000
	22	6.3	5.4	D	140	0.12	1.00	EEEF0C1V220AP	(5) 1000
	33	8	6.2	E	230	0.12	0.40	EEEF0C1V330AP	(6) 1000
	47	8	6.2	E	230	0.12	0.40	EEEF0C1V470AP	(6) 1000
	100	10	10.2	G	670	0.12	0.15	EEEF0C1V101AP	(6) 500
	220	10	10.2	G	670	0.12	0.15	EEEF0C1V221AP	(6) 500
	330	10	10.2	G	670	0.12	0.15	EEEF0C1V331AP	(6) 500

The taping dimensions are explained on p.195 of our Catalog. Please use it as a reference guide.
Reflow Profile(Fig-1 to Fig-6) listed on last page of our Catalog.

Design, and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and / or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.
Mar. 2006

■ Reflow guaranteed condition

● RoHS compliant

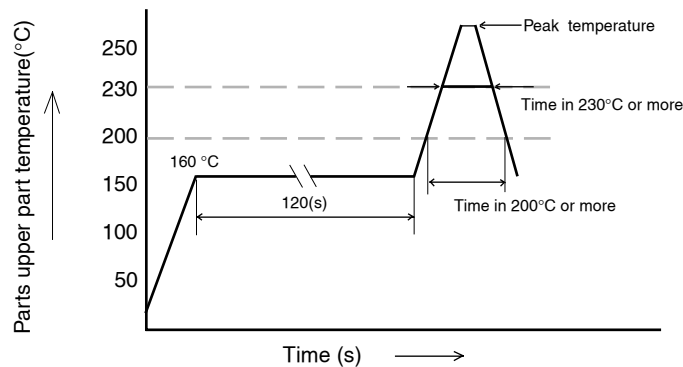

Lead-Free reflow

Reflow No	Fig.(1)	Fig.(2)	Fig.(3)	Fig.(4)
Category	φ 3 to φ 6.3	φ 8 to φ 10	φ 12.5 to φ 18	EB series only (φ 10 to φ 18)
Peak temperature	250°C	235°C	230°C (220°C)	230°C
Time in peak temperature	5s	5s	5s (s)	5s
Time in 200°C or more	60s	60s	20s (30s)	20s
Time of reflow	1 time	1 time	1 time	1 time

High temperature Lead-Free reflow

Reflow No	Fig.(5)	Fig.(6)
Category	φ 4 to φ 6.3	φ 8 to φ 10
Peak temperature	260°C (255°C)	245°C
Time around peak temperature	5s in (10s) in 250°C or more	10s in 240°C or more
Time in 230°C or more	30s	30s
Time in 200°C or more	70s	70s
Time of reflow	2 times	2 times

● RoHS not compliant

Category	Dia. φ3 to φ 6.3 EEV-, ECEV- Part No.	Dia. φ8 to φ 10 EEV-, ECEV- Part No.
Reflow condition	Peak temperature/ Time in 200°C or more Peak temperature/ Time in 200°C or more	Peak temperature/ Time in 200°C or more Peak temperature/ Time in 200°C or more

※ For reflow, use athermal condition system such as infrared radiation(IR) or hot blast.

※ Vapor heat transfer systems(VPS) are not recommended.

Design, and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and / or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.