GENERAL TOLERANCE										USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 OVR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±0.5º	0.1	

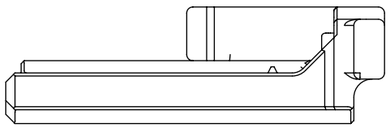

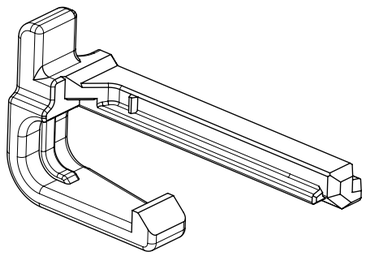

ISO VIEW



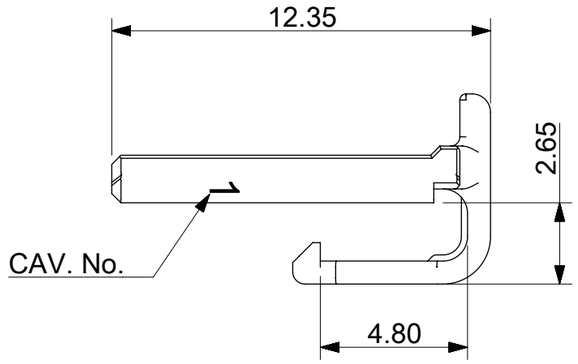

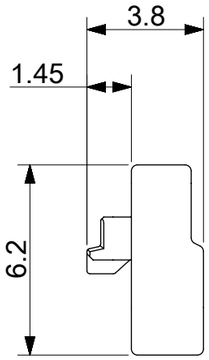

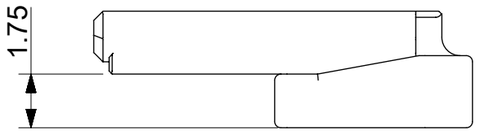

NOTES:
1. MATERIAL: POLYESTER(PBT-GF17%), GLASS FILLES, UL94V-0
   COLOR: GRAY
2. APPLICABLE HOUSING: 560123-0501,0500
3. GENERAL TOLERANCE: SEE TABLE
4. ELV AND RoHS COMPLIANT

QUALITY SYMBOLS	
FA	= 0
FC	= 0
FP	= 0
▼	= 0
C	= 0
☒	= 0
■	= 0
V	= 0

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RELEASED		
EC NO: 110900		
DRWN: SWYOON	2016/11/29	
CHK'D: SWYOON	2016/11/29	
APPR: JHJANG	2016/11/29	
REV	A	

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ±	°
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION UNITS	MM
SCALE	5:1
DRWN BY	SWYOON
DATE	2016/11/25
CHK'D BY	SWYOON
DATE	2016/11/29
APPR BY	
DATE	
DRAWING SIZE	A3
THIRD ANGLE PROJECTION	

molex®

NEW 2.0 PITCH W/B CONN. REC. 5WAY ISL
DURACLIK ISL SERIES

PRODUCT CUSTOMER DRAWING

SERIES	MATERIAL NUMBER	CUSTOMER
560125	5601250500	GENERAL MARKET

DOCUMENT NUMBER	DOC TYPE	DOC PART	SHEET NUMBER
5601250500	PSD	009	1 OF 1

RELEASE STATUS	P1	RELEASE DATE	29.11.2016 06:52:21

FORMAT: master-tb-prod-A3
REVISION: G
DATE: 2015/12/14