

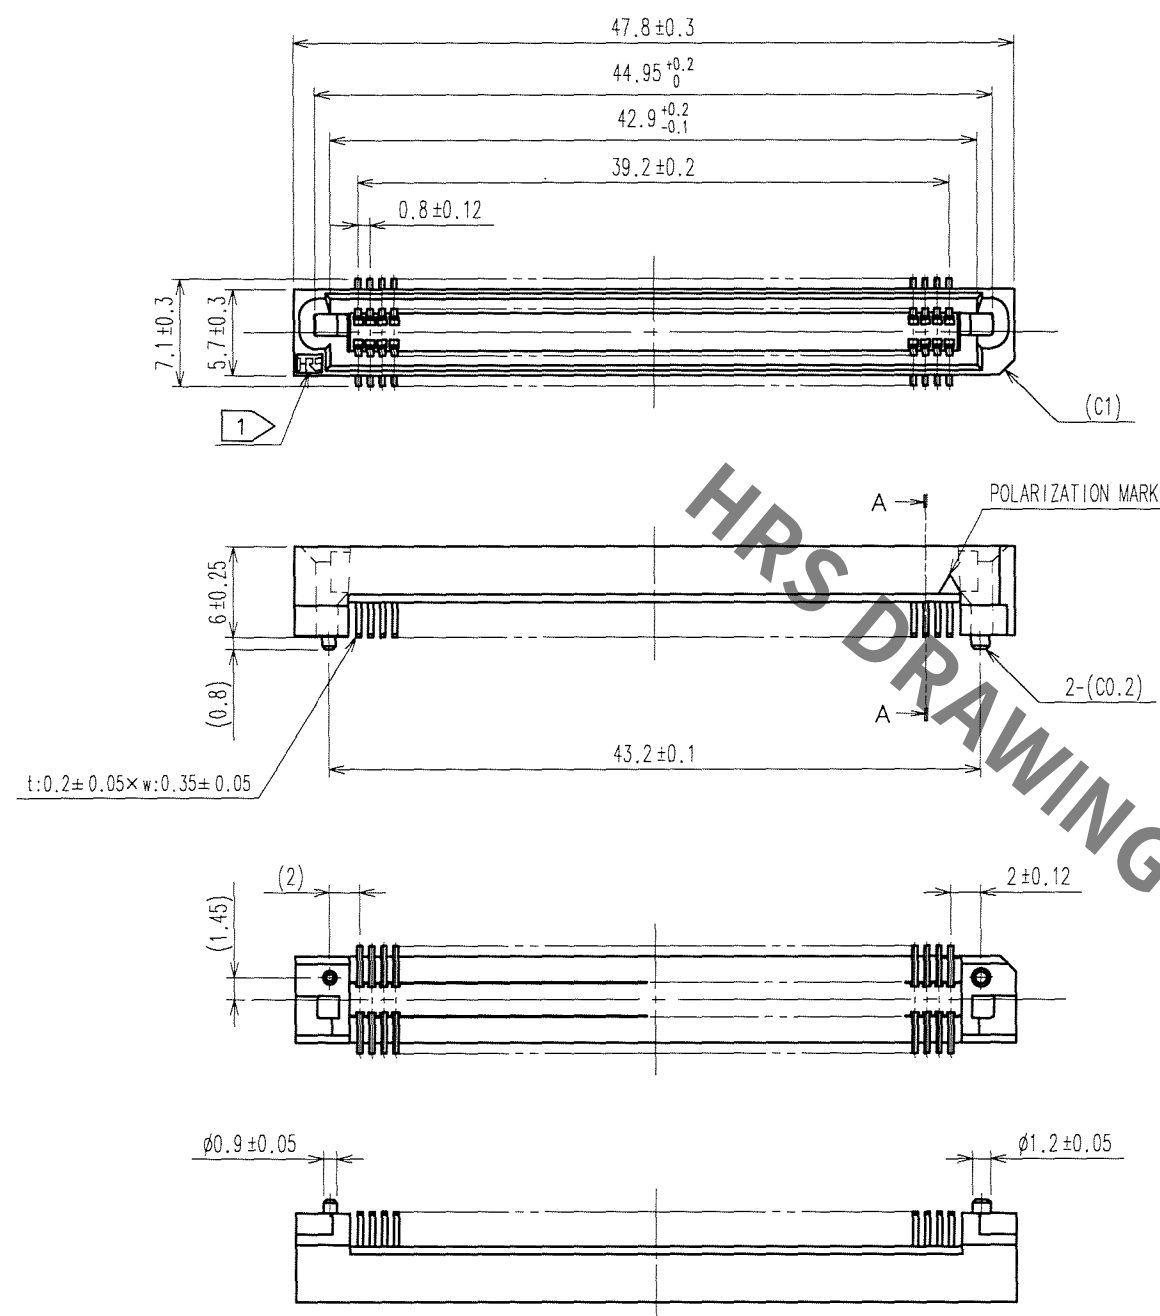


REVISIONS TO PREVIOUS EDITION						REVISIONS TO PREVIOUS EDITION					
	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

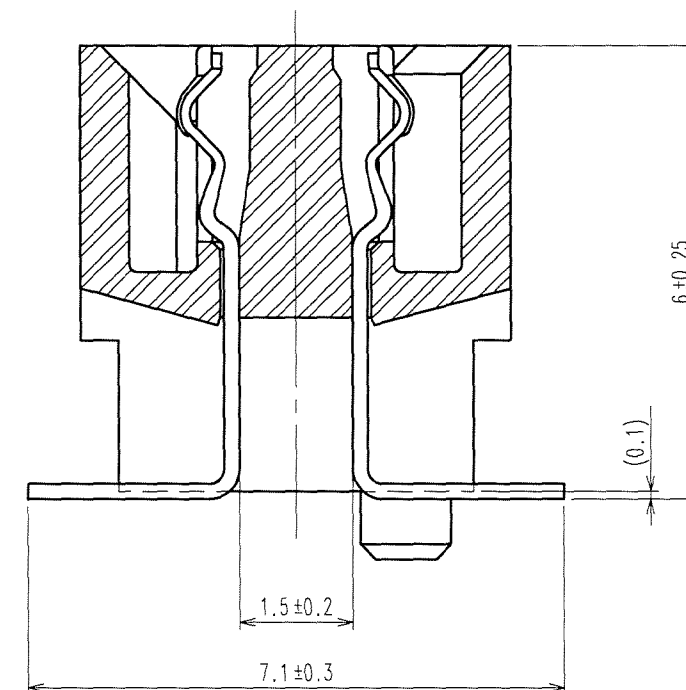


A-A (10:1)

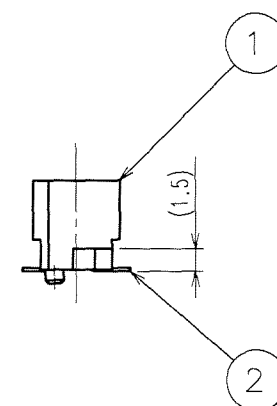

- NOTE 1 HRS MARK SHALL BE OPTIONAL.
2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION,ETC.
5 FOR MODIFICATION,ETC,PREVENTIVE HOLE FOR SINK MARK MAY BE
ADDED ACCORDING TO CIRCUMSTANCES.
6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

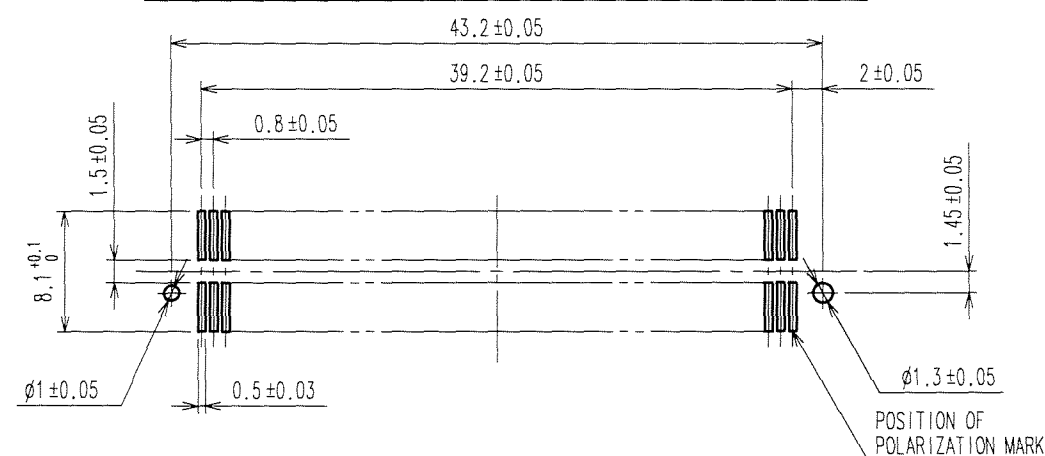

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.			
					LEAD AREA:TIN-PLATING 1μm min.			
					UNDER PLATING:NICKEL 2μm min.			
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
			S.KAMIGA	S.KAMIGA	K. Ogawa	H. Okawa		
			08.01.21	08.01.21	08.01.21	08.01.21	.	
		DRAWING NO.		PART NO.				
SCALE		EDC3-084986-23		FX6-100S-0.8SV2(93)				
2 : 1								
UNITS		HIROSE ELECTRIC CO., LTD		CODE NO.		1		
				CL576-0128-4-93				

Jan.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

