


REVISIONS		
LTR	DESCRIPTION	DATE
L	REVISED PER DCR NO R060223	10/13/2006
L1	REVISED PER ECO-09-021510	07OCT09

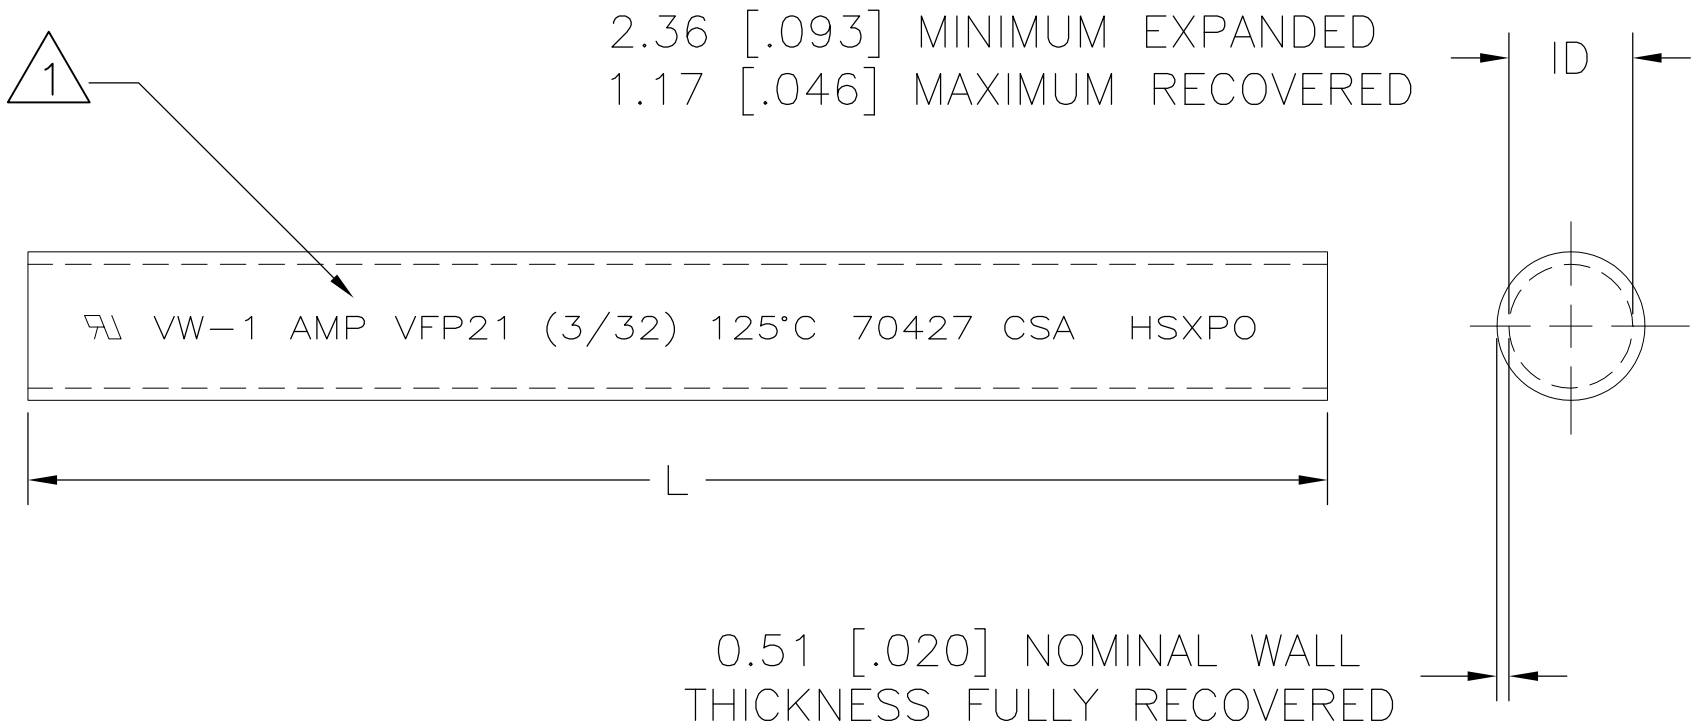

1 TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED

2 TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.

3 TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.

4 TUBING FP21 IS UNMARKED AND MEETS REQUIREMENTS OF AMS-DTL-23053/5-103-0

5. WEIGHT PER LINEAR FOOT/304.8 mm:
.86 g/.002 lbs.

6. MATERIAL: BLACK POLYOLEFIN

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

		1219.2 ± 12.7 [48.00 ± .50]	1-603323-6
		152.4 m [500 ft] MINIMUM	603323-6
	 	152.4 m [500 ft] MINIMUM	603323-5
		304.8 ± 3.05 [12.00 ± .12]	 -603323-4
		1219.2 ± 12.7 [48.00 ± .50]	603323-1
MARKING	NOTES	LENGTH L	PART NUMBER

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS. DECIMALS .XX ± .01 [0004 in] .X ± .1 [004 in] ANGLES .X ± 0.5 DEG	DRAWN UNGUYEN	DATE 10/13/2006	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA. USA 94025 		
	RPN				
	CAD NAME R060223		TITLE AMPSULATION VFP21 AND FP21 3/32 INCH ID, BLACK		
	THIRD ANGLE PROJECTION		SIZE B	CODE IDENT. NO. 06090	DWG. NO. 603323
	DO NOT SCALE THIS DRAWING			SHEET 1 OF 1	