



Lantq™ OctalIU

Eight-Channel E1/T1/J1 Line Interface Unit

General Features

- Meets Japanese standards including JT G.703, 704, 706, I.431
- Intel® or Motorola® type 8/16-bit microcontroller interface
- Serial SPI bus and serial SCI bus
- Low power consumption (100 mW per channel)
- Dual voltage 1.8 V/3.3 V power supply
- 17 x 17 mm PG-LBGA-256 package with 1.0 mm ball pitch
- Operating range from -40°C to 85°C

The OctalIU is the latest addition to Lantq's family of sophisticated E1/T1/J1 components. Designed to support both long haul and short haul applications, the eight-channel OctalIU provides support for all standard E1/T1/J1 Line Interface Unit functions.

As an eight-channel LIU, the OctalIU is ideally suited to high channel-count applications that do not require E1/T1/J1 framing, or require framing and LIU functions to be in separate devices, such as M13 multiplexers, wireless base stations and routers.

Using Lantq's EASY 22508 Reference Design System, system vendors can quickly develop OctalIU-based applications.

Applications

- M13 multiplexers
- Wireless base stations
- Routers
- Voice over packet gateways
- ATM and Frame Relay gateways
- Multi-service Access Platforms
- Digital Loop Carriers
- Digital cross connects
- Switches
- Remote access servers/concentrators
- SONET/SDH Add/Drop Multiplexers
- CSU/DSU equipment


Features

- Eight independent E1/T1/J1 long haul/short haul LIUs
- Software programmable T1/E1/J1 for a single BOM for all applications
- Integrated analog switch for impedance matching or protection switching
- Crystal-less wander and jitter attenuation/compensation according to: TR 62411, ETS-TBR 12/13
- Clock generation unit accepts any reference clock from 1.02 MHz to 20 MHz
- Programmable transmit pulse shape for standard and flexible pulse generation
- Supports automatic protection switching
- Integrated line termination tuning by additional analog switch
- Receiver sensitivity exceeds -36 dB at 772 kHz, and -43 dB at 1024 kHz
- Rx and Tx line monitoring
- Versatile channel configurations
- Dual or single rail digital input and output to the framer interface
- Programmable in-band loop code according to TR62411
- Programmable elastic store for Rx and Tx clock wander and jitter compensation with controlled slip capability and slip indication
- PRBS generation and monitoring
- Detects and generates LOS and AIS alarms


Lantiq™ OctalLIU

Eight-Channel E1/T1/J1 Line Interface Unit

Block Diagram OctalLIU

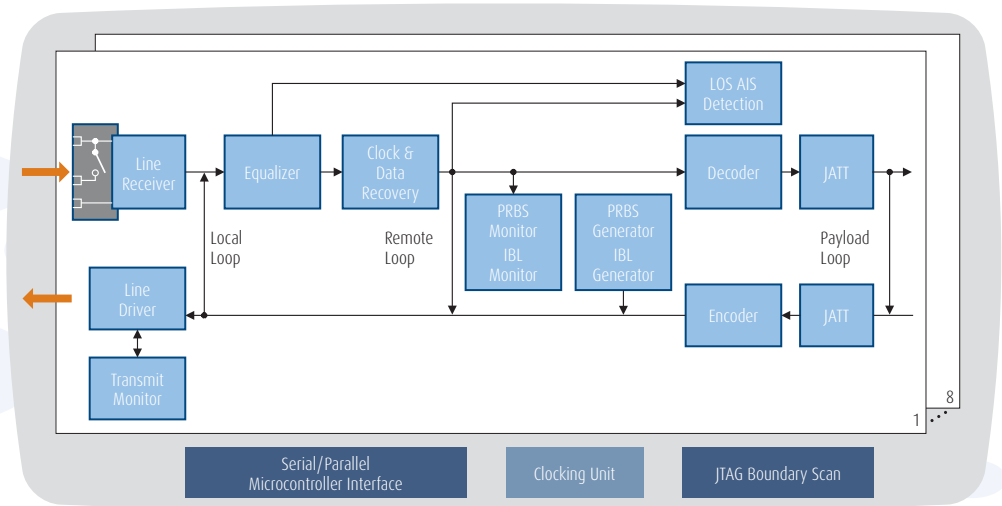

Application Example 32-Channel E1/T1/J1 Line Card with OctalLIU

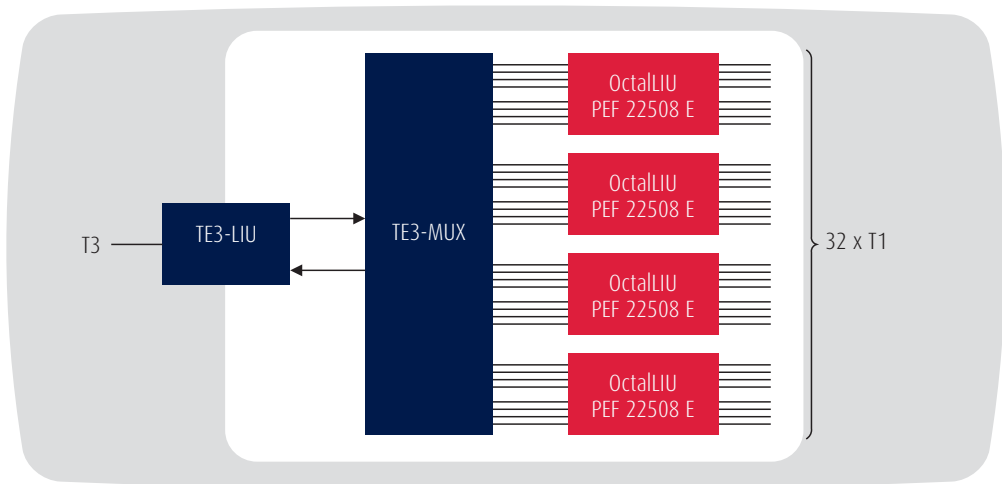

Product Summary

Sales Code	Application	Package
PEF 22508 E	OctalLIU Eight-Channel E1/T1/J1 Line Interface Unit	PG-LBGA-256
EASY 22508	OctalLIU Reference Design System	One board, software, and documentation



How to reach us: <http://www.Lantiq.com>

Published by Lantiq
85579 Neubiberg, Germany

© 2009 Lantiq. All Rights Reserved.

Legal Disclaimer The information given in this Product Brief shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Lantiq hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information For further information on technology, delivery terms and conditions and prices, please contact the nearest Lantiq Office (www.Lantiq.com).

Warnings Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Lantiq Office. Lantiq components may be used in life-support devices or systems only with the express written approval of Lantiq, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Order Number: PB-e-0010-v1