


RoHS Compliant 515-0005F

Part Numbers with the "F" suffix ending are RoHS Compliant.
Packaging is marked with "RoHS Compliant" label or
equivalent markings.

Parts can be wave soldered, dip soldered or hand soldered using
typical lead-free soldering process with max 260°C temp. for 5 sec.

REV	ECN NO	REVISIONS	DRN	CKD	APP	DATE
A	—	NEW RELEASE	CE	7.8.	<i>[Signature]</i>	3-5-07

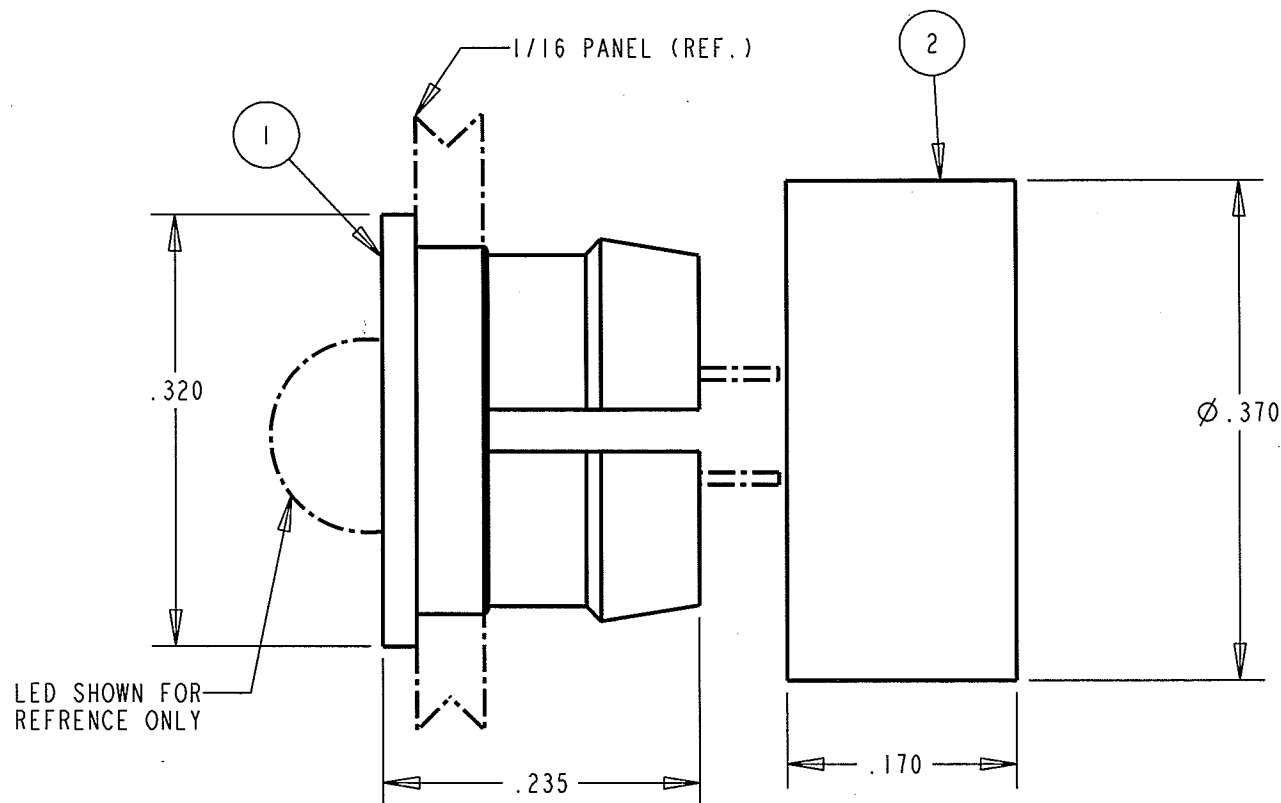

NOTES:

1. RECOMMENDED MOUNTING HOLE= .265
2. ALL DIMENSIONS $\pm .015$ UNLESS OTHERWISE SPECIFIED
3. DIALIGHT PART NUMBER: 515-0005F

2	1	RING
1	1	ADAPTER "A"
ITEM	QTY	DESCRIPTION

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND
THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING
OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE
FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE: 7.000	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-17480	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	ASSEMBLY
FRACTIONS: $\pm 1/64$		RoHS COMPLIANT
DECIMALS (.XX): $\pm .01$	MATERIAL	-
DECIMALS (.XXX): $\pm .005$		
DECIMALS (.XXXX): $\pm .0005$		
ANGLES: $\pm 1^\circ$		
FINISH:		
FSCM 83330	Dialight	1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727