
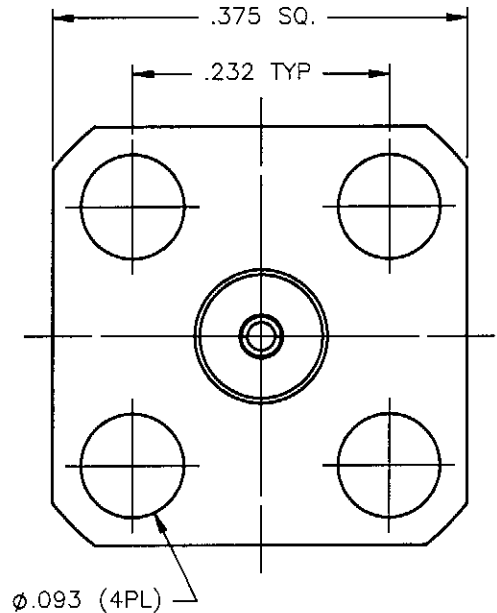


PROPRIETARY INFORMATION
NOT TO BE RELEASED
WITHOUT WRITTEN PERMISSION
FROM AN AUTHORIZED
REPRESENTATIVE OF
APPLIED ENGINEERING PRODUCTS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ECO #6970	01/11/08	K.P.

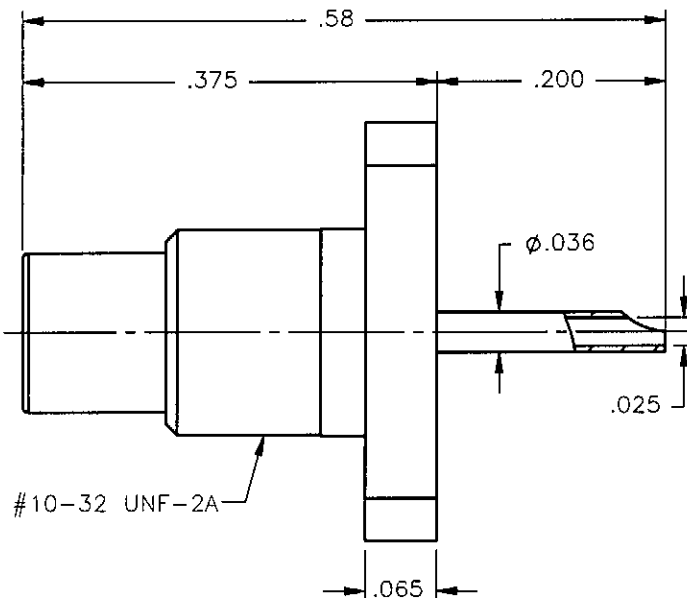

NOTES:

MATERIALS:

1. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. ALL METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: K.P.	DATE 01/11/08	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
		CHKD: G.L.	DATE 01/11/08	
DECIMAL	ANGLE	APVD: J.M.	DATE 01/11/08	SMC STRAIGHT MALE JACK (4) HOLE FLANGE SOLDER POT RECEPTACLE
REFERENCE: ORIGINATED: P.J.P. DATE: 06/13/83		MATERIALS & FINISHES: SEE NOTES		
SIZE A		FSCM NO. 19505	DWG NO. 1484-1511-000	REV A
SCALE 6:1		THIRD ANGLE PROJECTION		SHEET 1 OF 1

1484-1511-000