
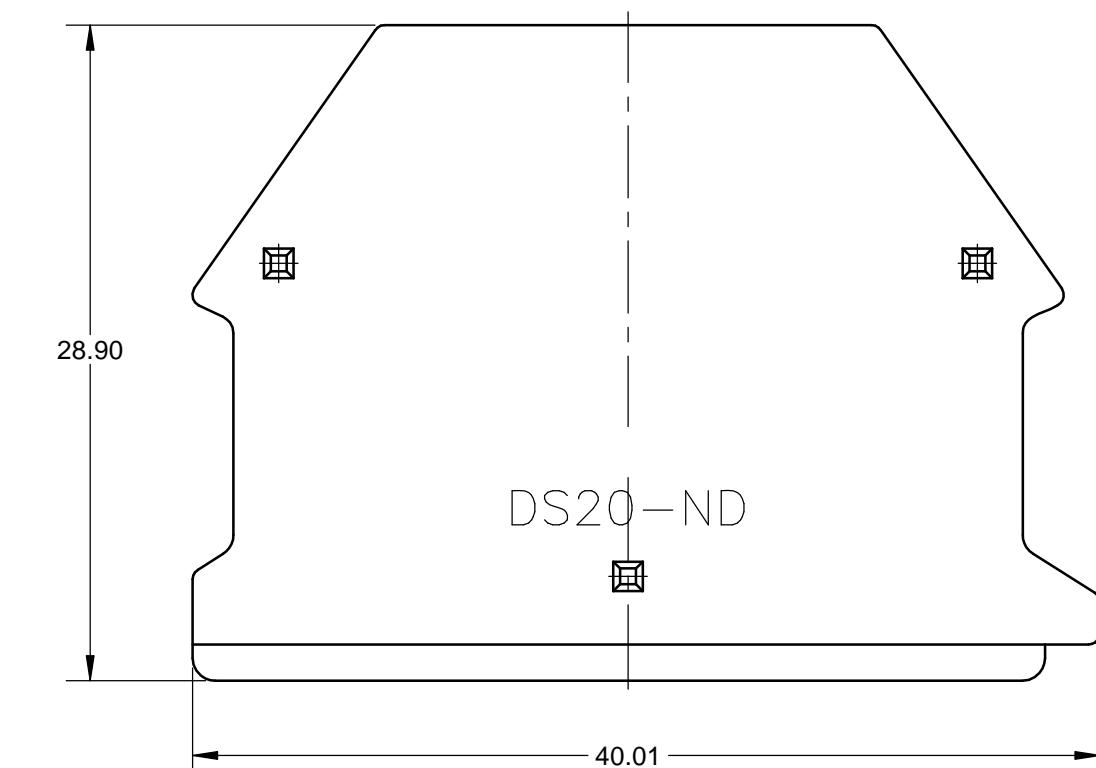
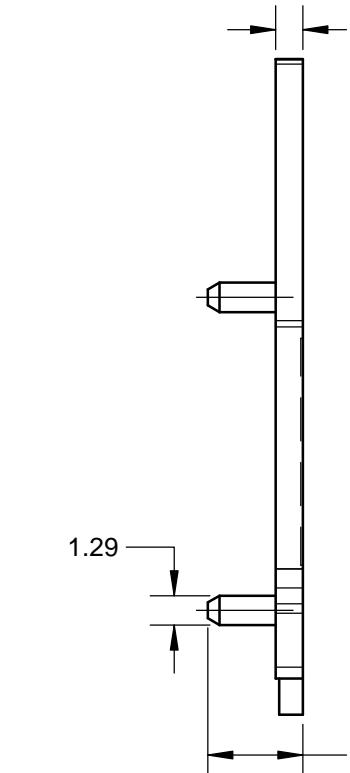


| 8 | | | 7 | 6 | 5 | 4 | 3 | 2 | 1 |
|------------|--------|-------------|---|---|---|---|---|---|---|
| PART NO. | COLOR | PANTONE # | | | | | | | |
| DS20-GY-ND | GREY | COOL GRAY2U | | | | | | | |
| DS20-RD-ND | RED | 1805U | | | | | | | |
| DS20-OR-ND | ORANGE | 152U | | | | | | | |
| DS20-YW-ND | YELLOW | 7404U | | | | | | | |
| DS20-GN-ND | GREEN | 362U | | | | | | | |
| DS20-BU-ND | BLUE | 300U | | | | | | | |
| DS20-LK-ND | BLACK | BLACK | | | | | | | |

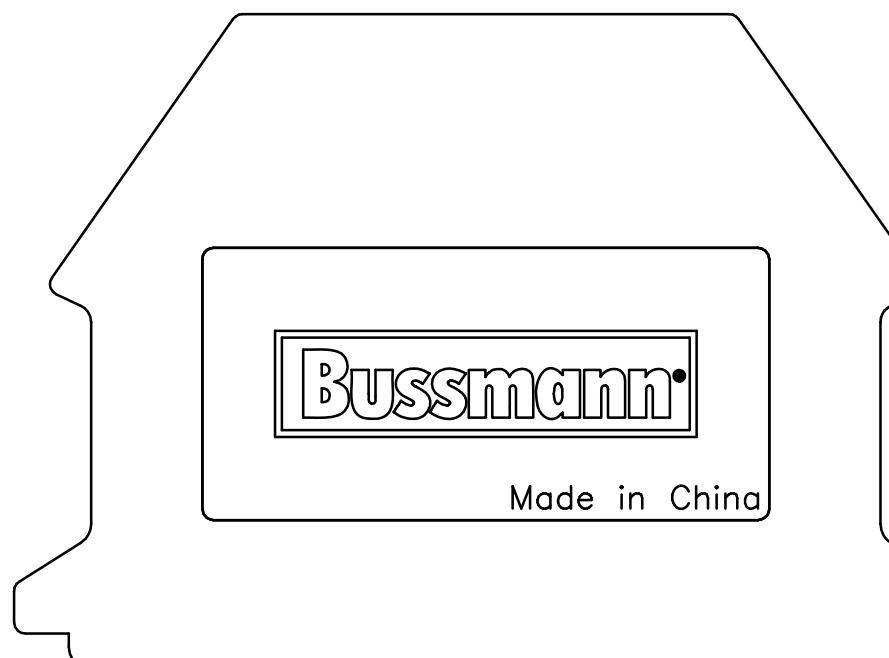

NOTES:

1. MATERIAL: PA66; UL94-V0 RATING
2. ASSEMBLY MUST BE FREE OF OIL, GREASE AND OTHER FOREIGN MATERIALS.
3. ASSEMBLY MUST COMPLY WITH RoHS SPECIFICATION #1P2163.

| MODEL SOURCE DATA | MODEL VERSION | GENERAL DRAWING PRACTICES IN ACCORDANCE WITH ASME - Y14.100-2004 | APPROVALS | DATE |
|-------------------|---------------|--|---|-----------------------|
| -- | | DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ASME - Y14.5M-1994 DO NOT SCALE DRAWING | ENGINEER TJN | 09/26/2012 |
| | | | DRAWN TJN | 09/26/2012 |
| | | | MANUFACTURING ENGINEER -- | --/-/-/- |
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES TO BE ONE PLACE X.X = ± 0.3 mm TWO PLACE X.X X = ± 0.13 mm ALL ANGLES X.X = $\pm 1^\circ$ | SEE TABLE | |
| | | | MATERIAL N/A | |
| | | | SPECIAL CHARACTERISTIC $\diamond (0)$ SIGNIFICANT CHARACTERISTIC $\triangle (0)$ | |
| | | | THIRD ANGLE PROJECTION | |
| | | | FINISH N/A | |
| | | | SIZE A3 | DWG NO. DS20-XX-ND |
| | | | SCALE: 3:1 | REV A |
| | | | | SHEET 1 OF 1 |

COOPER Bussmann
St. Louis, MO 63178 (USA)

END COVER