
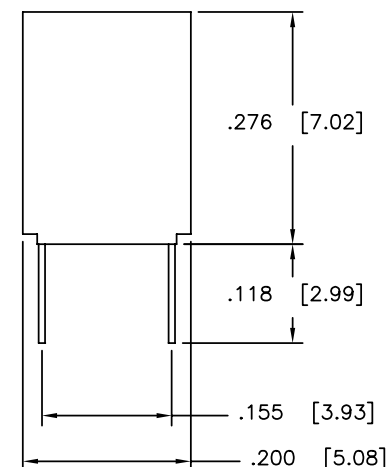
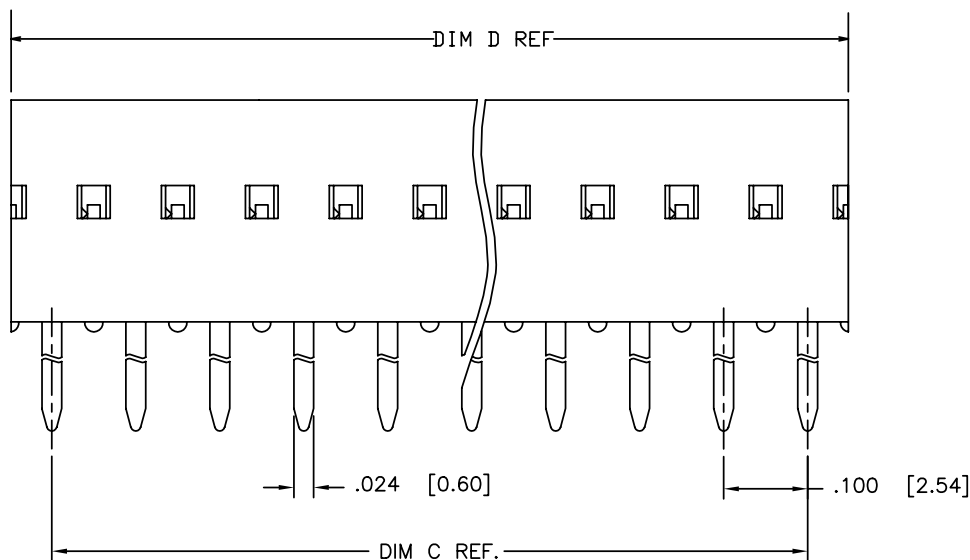


PRODUCT NUMBER
SEE TABLE

68682 - XXX - LF

LEAD FREE OPTION
PACKAGING OPTION. OMIT IF NOT REQUIRED
NO OF POSITIONS PER ROW
PLATING CODE
BASE PART NUMBER

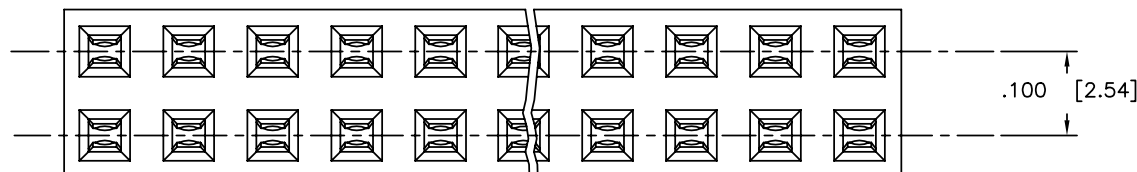

mat'l. code				surface		tolerance		projection		product family			
-				ISO 1302		ISO 406		ISO 1101		DUBOX			
ltr	ecn no	dr	date	tolerances unless otherwise specified		linear		INCH/MM		title			
T	N-005184	SH	2011-08-18	angles		XXX.01/XXX.3		scale 4:1		DUBOX DBL. ROW DBL. ENTRY			
U	ELX-N-13980	DCS	2013-01-28	linear		XXX.005/XXX.0.13		scale 4:1		VERT. CARD CONN. ASS'Y.			
V	ELX-N-14177	DCS	2013-03-04	0°±2°		XXXX.0020/XXXX.0.05		scale 4:1		dwg no			
P	M06-0433	MN	06/17/06	dr	S. RAMP	02/25/91	FCI		sheet 1 of 3		size		
R	M09-0121	MHT	7/24/09	chr	M. HAHN	02/25/91	68682		A3				
S	M09-0124	MHT	9/07/09	appd	M. HAHN	02/25/91	type		Product Customer Drawing				
sheet	revision	V	V	V	V	V	V	V	V	V	V	V	V
index	sheet	1	2	3	3	3	3	3	3	3	3	3	3

PRODUCT NO NOTE 8	PLATING CONTACT AREA MIN NOTE 11	PLATING SOLDER TAIL
68682-2XX	15u"/.38u Au DR GXT, OVER 50u"/1.27 Ni	100u"/160u" SN 2.54u"/4.06u"
68682-3XX	30u"/.76u Au DR GXT, OVER 50u"/1.27 Ni	100u"/160u" SN 2.54u"/4.06u"
68682-4XX	100u"/160u" SN 2.54u"/4.06u"	100u"/160u" SN 2.54u"/4.06u"
68682-5XX	50u"/1.27u Au OVER 50u"/1.27 Ni	100u"/160u" SN 2.54u"/4.06u"
68682-6XX	30u"/.76u Au DR GXT, OVER 50u"/1.27 Ni	100u"/160u" SN 2.54u"/4.06u"
68682-8XX	30u"/.76u Au OVER 50u"/1.27 Ni	100u"/160u" SnPb 2.54u"/4.06u"

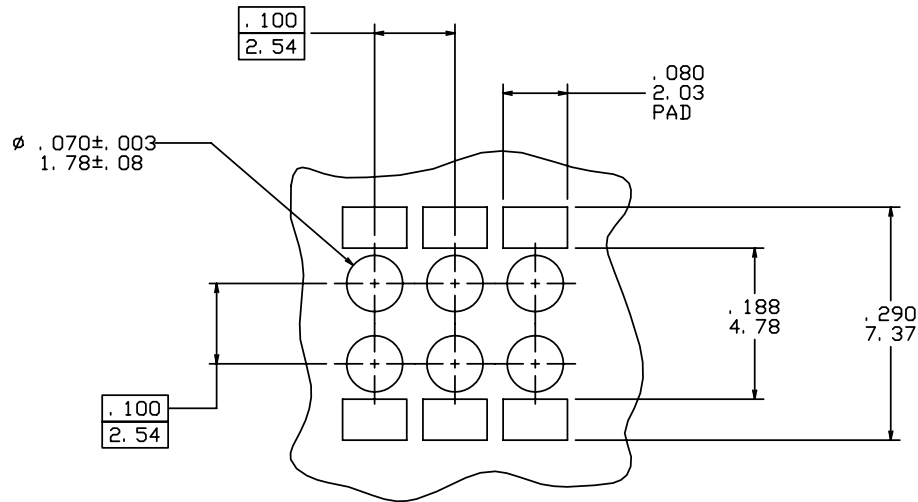


FIGURE A

NOTES:

- MATERIAL TERMINAL: PHOSPHOR BRONZE.
- RECOMMENDED APPLICATION DATA:
 - RECOMMENDED HOLE PATTERN IS SHOWN IN FIGURE A.
 - ALL MATING PINS TO BE .025/.64 SQUARE ON TRUE CENTER OF GIVEN TERMINAL SPACINGS WITHIN .015/.38 DIA
 - SUGGESTED MATING PIN LENGTH .210±.020/5.33±.51
 - TERMINALS CAN ONLY BE USED FOR PC BOARD WITH NON PLATED THROUGH HOLES.
 - RECOMMENDED PC BOARD THICKNESS: .062/1.58
- MATERIAL HOUSING: PPS FILLED, COLOR BLACK, FLAME RETARDANT PER UL-94V-0.
PART WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.
- FCI, FCI FINAL PART NUMBER AND DATE CODE TO BE MARKED ON TUBE LABEL.
- PREPLATED, STAMPED TERMINALS.
- PART NUMBER WITH SUFFIX "U" IS FOR SAWING PURPOSES ONLY.
- STANDARD TUBE PACKAGE PER BUS-14-097/3.
- ADD LF SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS".

mat'l. code				surface	tolerance	projection	product family
-				ISO 1302 ✓	ISO 406 ISO 1101	ISO 1101	DUBOX
ltr	ecn	no	dr	date	tolerances unless otherwise specified	INCH/MM	title
v					linear	scale 4:1	DUBOX DBL. ROW DBL. ENTRY VERT. CARD CONN. ASS'Y.
					angles		dwg no
					0°±2'		sheet 2 of 3
					dr	S. RAMP	size
					enr	M. HAHN	68682
					chr	M. HAHN	A3
					appd	M. HAHN	type
							Product Customer Drawing
sheet	revision						
index	sheet						

1					2					3					4					5					6				
PRODUCT NO					NO. OF POSITION					DIM C					DIM D					LF OPTION									
68682-Y02					2 X 2					. 100/2. 54					. 217/5. 51														
-Y03					2 X 3					. 200/5. 08					. 317/8. 05														
-Y04					2 X 4					. 300/7. 62					. 417/10. 59														
-Y05					2 X 5					. 400/10. 16					. 517/13. 13														
-Y06					2 X 6					. 500/12. 70					. 617/15. 67														
-Y07					2 X 7					. 600/15. 24					. 717/18. 21														
-Y08					2 X 8					. 700/17. 78					. 817/20. 75														
-Y09					2 X 9					. 800/20. 32					. 917/23. 29														
-Y10					2 X 10					. 900/22. 86					1. 017/25. 83														
-Y11					2 X 11					1. 000/25. 40					1. 117/28. 37														
-Y12					2 X 12					1. 100/27. 94					1. 217/30. 91														
-Y13					2 X 13					1. 200/30. 48					1. 317/33. 45														
-Y14					2 X 14					1. 300/33. 02					1. 417/35. 99														
-Y15					2 X 15					1. 400/35. 56					1. 517/38. 53														
-Y16					2 X 16					1. 500/38. 10					1. 617/41. 07														
-Y17					2 X 17					1. 600/40. 64					1. 717/43. 61														
-Y18					2 X 18					1. 700/43. 18					1. 817/46. 15														
-Y19					2 X 19					1. 800/45. 72					1. 917/48. 69														
-Y20					2 X 20					1. 900/48. 26					2. 017/51. 23														
-Y21					2 X 21					2. 000/50. 80					2. 117/53. 77														
-Y22					2 X 22					2. 100/53. 34					2. 217/56. 31														
-Y23					2 X 23					2. 200/55. 88					2. 317/58. 85														
-Y24					2 X 24					2. 300/58. 42					2. 417/61. 39														
-Y25					2 X 25					2. 400/60. 96					2. 517/63. 93														
-Y26					2 X 26					2. 500/63. 50					2. 617/66. 47														
-Y27					2 X 27					2. 600/66. 04					2. 717/69. 01														
-Y28					2 X 28					2. 700/68. 58					2. 817/71. 55														
-Y29					2 X 29					2. 800/71. 12					2. 917/74. 09														
-Y30					2 X 30					2. 900/73. 66					3. 017/76. 63														
-Y31					2 X 31					3. 000/76. 20					3. 117/79. 17														
-Y32					2 X 32					3. 100/78. 74					3. 217/81. 71														
-Y33					2 X 33					3. 200/81. 28					3. 317/84. 25														
-Y34					2 X 34					3. 300/83. 82					3. 417/86. 79														
68682-Y35					2 X 35					3. 400/86. 36					3. 517/89. 33														