

# EL2125

Ultra-Low Noise, Low Power, Wideband Amplifier

FN7045  
Rev 3.00  
May 4, 2007

The EL2125 is an ultra-low noise, wideband amplifier that runs on half the supply current of competitive parts. It is intended for use in systems such as ultrasound imaging where a very small signal needs to be amplified by a large amount without adding significant noise. Its low power dissipation enables it to be packaged in the tiny SOT-23 package, which further helps systems where many input channels create both space and power dissipation problems.

The EL2125 is stable for gains of 10 and greater and uses traditional voltage feedback. This allows the use of reactive elements in the feedback loop, a common requirement for many filter topologies. It operates from  $\pm 2.5V$  to  $\pm 15V$  supplies and is available in the 5 Ld SOT-23 and 8 Ld SOIC packages.

The EL2125 is fabricated using Elantec's proprietary complementary bipolar process, and is specified for operation from  $-45^{\circ}C$  to  $+85^{\circ}C$ .

## Ordering Information

| PART NUMBER              | PART MARKING | TAPE & REEL  | PACKAGE             | PKG. DWG. # |
|--------------------------|--------------|--------------|---------------------|-------------|
| EL2125CW-T7              | F            | 7" (3k pcs)  | 5 Ld SOT-23         | MDP0038     |
| EL2125CW-T7A             | F            | 7" (250 pcs) | 5 Ld SOT-23         | MDP0038     |
| EL2125CS                 | 2125CS       | -            | 8 Ld SOIC           | MDP0027     |
| EL2125CS-T7              | 2125CS       | 7"           | 8 Ld SOIC           | MDP0027     |
| EL2125CS-T13             | 2125CS       | 13"          | 8 Ld SOIC           | MDP0027     |
| EL2125CSZ (See Note)     | 2125CSZ      | -            | 8 Ld SOIC (Pb-free) | MDP0027     |
| EL2125CSZ-T7 (See Note)  | 2125CSZ      | 7"           | 8 Ld SOIC (Pb-free) | MDP0027     |
| EL2125CSZ-T13 (See Note) | 2125CSZ      | 13"          | 8 Ld SOIC (Pb-free) | MDP0027     |

NOTE: Intersil Pb-free products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.



## Features

- Voltage noise of only  $0.83nV/\sqrt{Hz}$
- Current noise of only  $2.4pA/\sqrt{Hz}$
- $200\mu V$  offset voltage
- 175MHz -3dB BW for  $A_V = 10$
- Low supply current - 10mA
- SOT-23 package available
- $\pm 2.5V$  to  $\pm 15V$  operation
- Pb-Free Plus Anneal Available (RoHS Compliant)

## Applications

- Ultrasound input amplifiers
- Wideband instrumentation
- Communication equipment
- AGC and PLL active filters
- Wideband sensors

## Pinouts



**Absolute Maximum Ratings** ( $T_A = +25^{\circ}\text{C}$ )

$V_{S+}$  to  $V_{S-}$  ..... 33V  
 Continuous Output Current ..... 40mA  
 Any Input .....  $V_{S-} - 0.3\text{V}$  to  $V_{S+} + 0.3\text{V}$

**Thermal Information**

Ambient Operating Temperature .....  $-45^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 Storage Temperature .....  $-65^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$   
 Maximum Die Junction Temperature .....  $+150^{\circ}\text{C}$   
 Power Dissipation ..... See Curves  
 Pb-free reflow profile ..... see link below  
<http://www.intersil.com/pbfree/Pb-FreeReflow.asp>

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

**IMPORTANT NOTE:** All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore:  $T_J = T_C = T_A$

**Electrical Specifications**  $V_S = \pm 5\text{V}$ ,  $T_A = +25^{\circ}\text{C}$ ,  $R_F = 180\Omega$ ,  $R_G = 20\Omega$ ,  $R_L = 500\Omega$  unless otherwise specified.

| PARAMETER                                                                          | DESCRIPTION                                    | CONDITIONS                                    | MIN  | TYP   | MAX  | UNIT                           |
|------------------------------------------------------------------------------------|------------------------------------------------|-----------------------------------------------|------|-------|------|--------------------------------|
| <b>DC PERFORMANCE</b>                                                              |                                                |                                               |      |       |      |                                |
| $V_{OS}$                                                                           | Input Offset Voltage (SO8)                     |                                               |      | 0.2   | 2    | mV                             |
|                                                                                    | Input Offset Voltage (SOT23-5)                 |                                               |      |       | 3    | mV                             |
| $T_{CVOS}$                                                                         | Offset Voltage Temperature Coefficient         |                                               |      | 1.8   |      | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$                                                                              | Input Bias Current                             |                                               | -30  | -22   |      | $\mu\text{A}$                  |
| $I_{OS}$                                                                           | Input Bias Current Offset                      |                                               |      | 0.4   | 2    | $\mu\text{A}$                  |
| $T_{CIB}$                                                                          | Input Bias Current Temperature Coefficient     |                                               |      | 0.09  |      | $\mu\text{A}/^{\circ}\text{C}$ |
| $C_{IN}$                                                                           | Input Capacitance                              |                                               |      | 2.2   |      | pF                             |
| $A_{VOL}$                                                                          | Open Loop Gain                                 |                                               | 80   | 87    |      | dB                             |
| PSRR                                                                               | Power Supply Rejection Ratio (Note 1)          |                                               | 80   | 97    |      | dB                             |
| CMRR                                                                               | Common Mode Rejection Ratio                    | at CMIR                                       | 80   | 106   |      | dB                             |
| CMIR                                                                               | Common Mode Input Range                        |                                               | -4.6 |       | 3.8  | V                              |
| $V_{OUTH}$                                                                         | Output Voltage Swing High                      | No load, $R_F = 1\text{k}\Omega$              | 3.5  | 3.65  |      | V                              |
| $V_{OUTL}$                                                                         | Output Voltage Swing Low                       | No load, $R_F = 1\text{k}\Omega$              |      | -3.87 | -3.7 | V                              |
| $V_{OUTH2}$                                                                        | Output Voltage Swing High                      | $R_L = 100\Omega$                             | 3    | 3.3   |      | V                              |
| $V_{OUTL2}$                                                                        | Output Voltage Swing Low                       | $R_L = 100\Omega$                             |      | -3.5  | -3   | V                              |
| $I_{OUT}$                                                                          | Output Short Circuit Current (Note 2)          |                                               | 80   | 100   |      | mA                             |
| $I_S$                                                                              | Supply Current                                 |                                               |      | 10.1  | 11   | mA                             |
| <b>AC PERFORMANCE - <math>R_G = 20\Omega</math>, <math>C_L = 5\text{pF}</math></b> |                                                |                                               |      |       |      |                                |
| BW                                                                                 | -3dB Bandwidth                                 |                                               |      | 175   |      | MHz                            |
| BW $\pm 0.1\text{dB}$                                                              | $\pm 0.1\text{dB}$ Bandwidth                   |                                               |      | 34    |      | MHz                            |
| BW $\pm 1\text{dB}$                                                                | $\pm 1\text{dB}$ Bandwidth                     |                                               |      | 150   |      | MHz                            |
| Peaking                                                                            | Peaking                                        |                                               |      | 0.4   |      | dB                             |
| SR                                                                                 | Slew Rate                                      | $V_{OUT} = 2V_{P-P}$ , measured at 20% to 80% | 150  | 185   |      | V/ $\mu\text{s}$               |
| OS                                                                                 | Overshoot, $4V_{P-P}$ Output Square Wave       | Positive                                      |      | 0.6   |      | %                              |
|                                                                                    |                                                | Negative                                      |      | 2.7   |      | %                              |
| $t_S$                                                                              | Settling Time to 0.1% of $\pm 1\text{V}$ Pulse |                                               |      | 42    |      | ns                             |

**Electrical Specifications**  $V_S = \pm 5V$ ,  $T_A = +25^\circ C$ ,  $R_F = 180\Omega$ ,  $R_G = 20\Omega$ ,  $R_L = 500\Omega$  unless otherwise specified. (Continued)

| PARAMETER | DESCRIPTION                      | CONDITIONS | MIN | TYP  | MAX | UNIT            |
|-----------|----------------------------------|------------|-----|------|-----|-----------------|
| $V_N$     | Voltage Noise Spectral Density   | 10kHz      |     | 0.83 |     | nV/ $\sqrt{Hz}$ |
| $I_N$     | Current Noise Spectral Density   | 10kHz      |     | 2.4  |     | pA/ $\sqrt{Hz}$ |
| HD2       | 2nd Harmonic Distortion (Note 3) |            |     | -74  |     | dBc             |
| HD3       | 3rd Harmonic Distortion          |            |     | -91  |     | dBc             |

## NOTES:

1. Measured by moving the supplies from  $\pm 4V$  to  $\pm 6V$
2. Pulse test only
3. Frequency = 1MHz,  $V_{OUT} = 2V_{P-P}$ , into  $500\Omega$  and 5pF load

**Electrical Specifications**  $V_S = \pm 15V$ ,  $T_A = +25^\circ C$ ,  $R_F = 180\Omega$ ,  $R_G = 20\Omega$ ,  $R_L = 500\Omega$  unless otherwise specified.





| PARAMETER                                                                   | DESCRIPTION                                     | CONDITIONS                                    | MIN   | TYP   | MAX  | UNIT             |
|-----------------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------|-------|-------|------|------------------|
| <b>DC PERFORMANCE</b>                                                       |                                                 |                                               |       |       |      |                  |
| $V_{OS}$                                                                    | Input Offset Voltage (SO8)                      |                                               |       | 0.6   | 3    | mV               |
|                                                                             | Input Offset Voltage (SOT23-5)                  |                                               |       |       | 3    | mV               |
| $T_{CVOS}$                                                                  | Offset Voltage Temperature Coefficient          |                                               |       | 4.9   |      | $\mu V/^\circ C$ |
| $I_B$                                                                       | Input Bias Current                              |                                               | -30   | -24   |      | $\mu A$          |
| $I_{OS}$                                                                    | Input Bias Current Offset                       |                                               |       | 0.4   | 2    | $\mu A$          |
| $T_{CIB}$                                                                   | Input Bias Current Temperature Coefficient      |                                               |       | 0.08  |      | $\mu A/^\circ C$ |
| $C_{IN}$                                                                    | Input Capacitance                               |                                               |       | 2.2   |      | pF               |
| $A_{VOL}$                                                                   | Open Loop Gain                                  |                                               | 80    | 87    |      | dB               |
| PSRR                                                                        | Power Supply Rejection Ratio (Note 4)           |                                               | 80    | 97    |      | dB               |
| CMRR                                                                        | Common Mode Rejection Ratio                     | at CMIR                                       | 75    | 105   |      | dB               |
| CMIR                                                                        | Common Mode Input Range                         |                                               | -14.6 |       | 13.8 | V                |
| $V_{OUTH}$                                                                  | Output Voltage Swing High                       | No load, $R_F = 1k\Omega$                     | 13.35 | 13.5  |      | V                |
| $V_{OUTL}$                                                                  | Output Voltage Swing Low                        | No load, $R_F = 1k\Omega$                     |       | -13.6 | -13  | V                |
| $V_{OUTH2}$                                                                 | Output Voltage Swing High                       | $R_L = 100\Omega$                             | 11    | 11.6  |      | V                |
| $V_{OUTL2}$                                                                 | Output Voltage Swing Low                        | $R_L = 100\Omega$                             |       | -10.4 | -9.8 | V                |
| $I_{OUT}$                                                                   | Output Short Circuit Current (Note 5)           |                                               | 120   | 250   |      | mA               |
| $I_S$                                                                       | Supply Current                                  |                                               |       | 10.8  | 12   | mA               |
| <b>AC PERFORMANCE - <math>R_G = 20\Omega</math>, <math>C_L = 5pF</math></b> |                                                 |                                               |       |       |      |                  |
| BW                                                                          | -3dB Bandwidth                                  |                                               |       | 220   |      | MHz              |
| BW $\pm 0.1dB$                                                              | $\pm 0.1dB$ Bandwidth                           |                                               |       | 23    |      | MHz              |
| BW $\pm 1dB$                                                                | $\pm 1dB$ Bandwidth                             |                                               |       | 63    |      | MHz              |
| Peaking                                                                     | Peaking                                         |                                               |       | 2.5   |      | dB               |
| SR                                                                          | Slew Rate                                       | $V_{OUT} = 2V_{P-P}$ , measured at 20% to 80% | 180   | 225   |      | V/ $\mu s$       |
| OS                                                                          | Overshoot, 4V <sub>P-P</sub> Output Square Wave |                                               |       | 0.6   |      | %                |
| $t_S$                                                                       | Settling Time to 0.1% of $\pm 1V$ Pulse         |                                               |       | 38    |      | ns               |

**Electrical Specifications**  $V_S = \pm 15V$ ,  $T_A = +25^\circ C$ ,  $R_F = 180\Omega$ ,  $R_G = 20\Omega$ ,  $R_L = 500\Omega$  unless otherwise specified. (Continued)

| PARAMETER | DESCRIPTION                      | CONDITIONS | MIN | TYP  | MAX | UNIT            |
|-----------|----------------------------------|------------|-----|------|-----|-----------------|
| $V_N$     | Voltage Noise Spectral Density   | 10kHz      |     | 0.95 |     | nV/ $\sqrt{Hz}$ |
| $I_N$     | Current Noise Spectral Density   | 10kHz      |     | 2.1  |     | pA/ $\sqrt{Hz}$ |
| HD2       | 2nd Harmonic Distortion (Note 6) |            |     | -73  |     | dBc             |
| HD3       | 3rd Harmonic Distortion          |            |     | -96  |     | dBc             |

## NOTES:

4. Measured by moving the supplies from  $\pm 13.5V$  to  $\pm 16.5V$
5. Pulse test only
6. Frequency = 1MHz,  $V_{OUT} = 2V_{P-P}$ , into  $500\Omega$  and  $5pF$  load

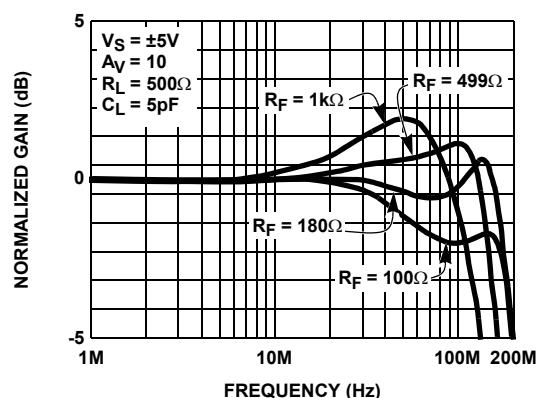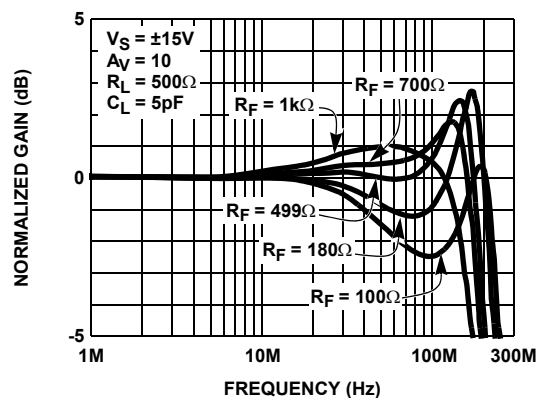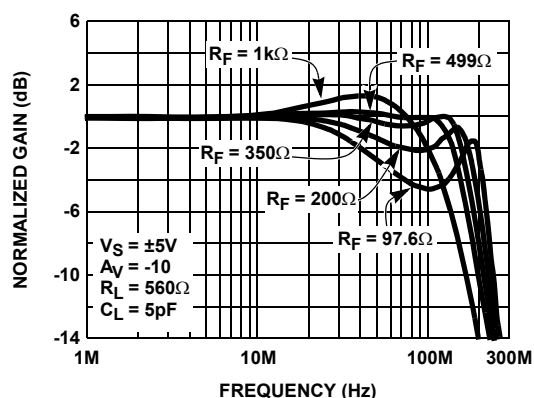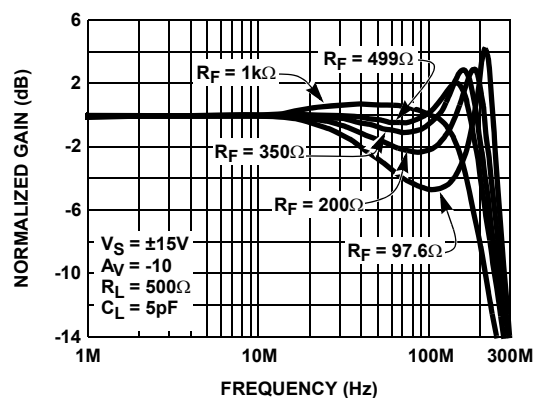**Typical Performance Curves**FIGURE 1. NON-INVERTING FREQUENCY RESPONSE FOR VARIOUS  $R_F$ FIGURE 2. NON-INVERTING FREQUENCY RESPONSE FOR VARIOUS  $R_F$ FIGURE 3. INVERTING FREQUENCY RESPONSE FOR VARIOUS  $R_F$ FIGURE 4. INVERTING FREQUENCY RESPONSE FOR VARIOUS  $R_F$

## Typical Performance Curves (Continued)

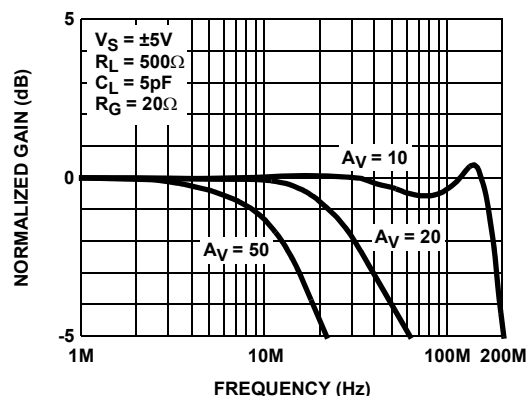


FIGURE 5. NON-INVERTING FREQUENCY RESPONSE vs GAIN

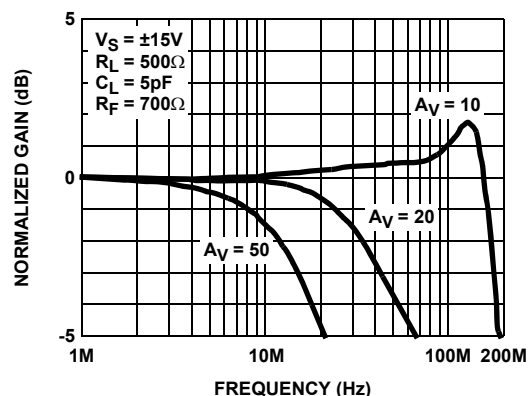


FIGURE 6. NON-INVERTING FREQUENCY RESPONSE FOR VARIOUS GAIN

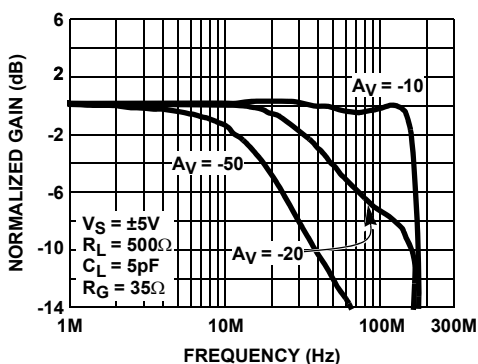


FIGURE 7. INVERTING FREQUENCY RESPONSE vs GAIN

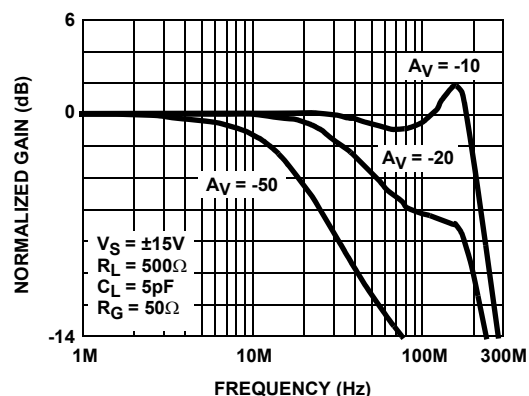


FIGURE 8. INVERTING FREQUENCY RESPONSE vs GAIN

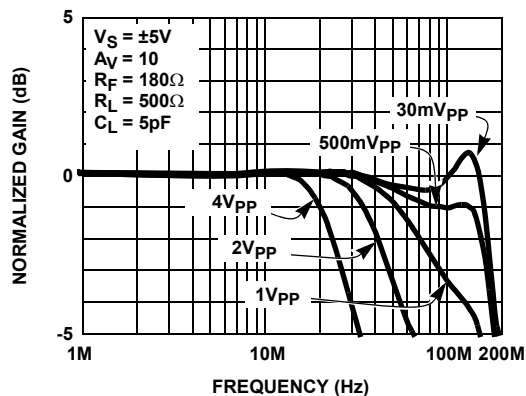


FIGURE 9. NON-INVERTING FREQUENCY RESPONSE FOR VARIOUS OUTPUT SIGNAL LEVELS

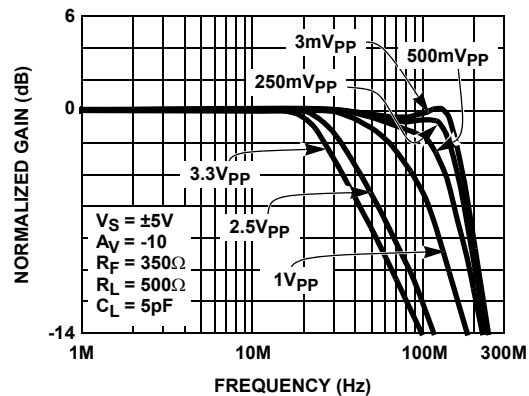


FIGURE 10. INVERTING FREQUENCY RESPONSE FOR VARIOUS OUTPUT SIGNAL LEVELS

## Typical Performance Curves (Continued)

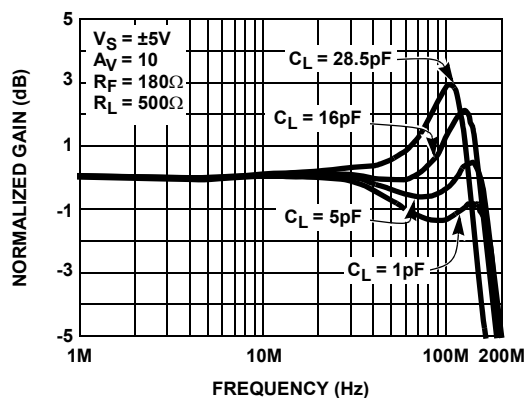


FIGURE 11. NON-INVERTING FREQUENCY RESPONSE FOR VARIOUS  $C_L$

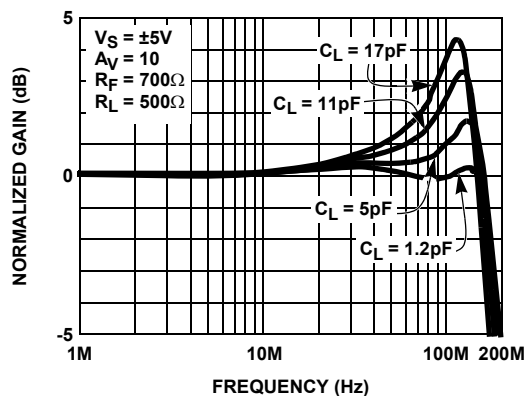


FIGURE 12. NON-INVERTING FREQUENCY RESPONSE FOR VARIOUS  $C_L$

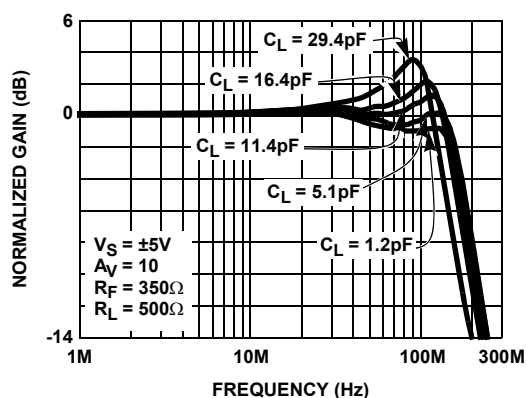


FIGURE 13. INVERTING FREQUENCY RESPONSE FOR VARIOUS  $C_L$

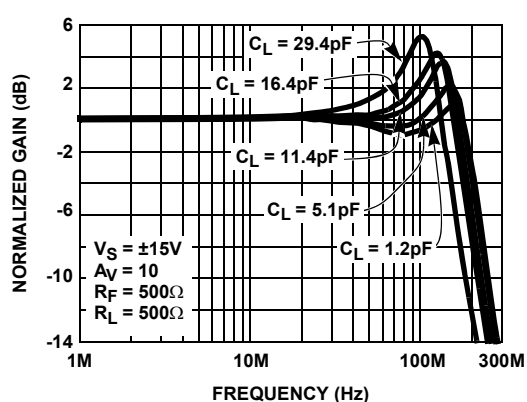


FIGURE 14. INVERTING FREQUENCY RESPONSE FOR VARIOUS  $C_L$

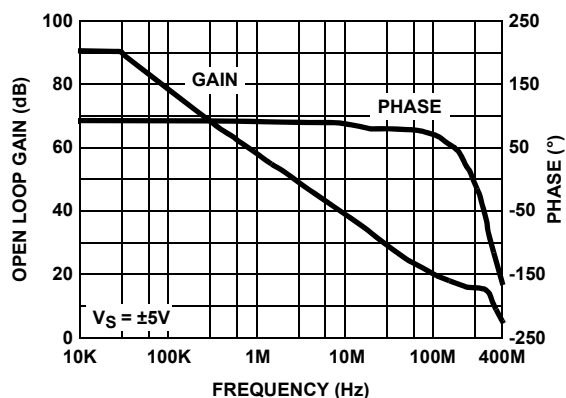


FIGURE 15. OPEN LOOP GAIN AND PHASE

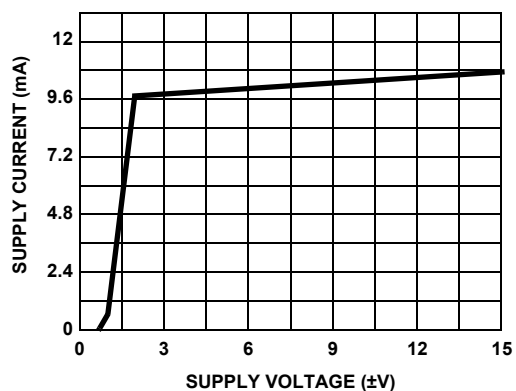


FIGURE 16. SUPPLY CURRENT vs SUPPLY VOLTAGE

## Typical Performance Curves (Continued)

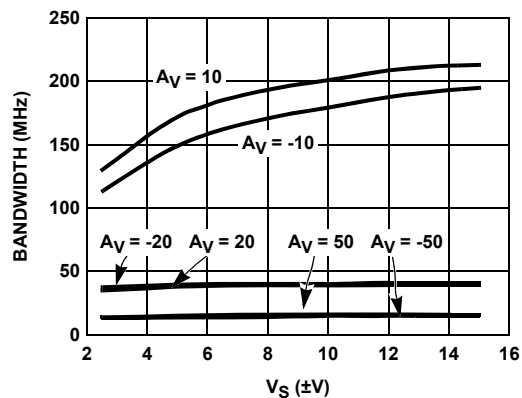


FIGURE 17. 3dB BANDWIDTH vs SUPPLY VOLTAGE

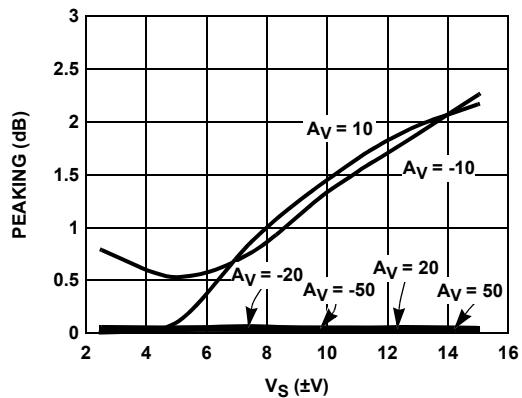


FIGURE 18. PEAKING vs SUPPLY VOLTAGE

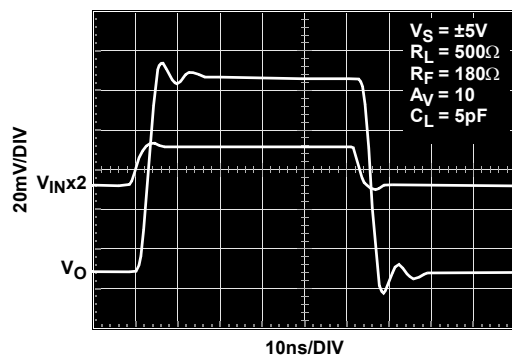


FIGURE 19. SMALL SIGNAL STEP RESPONSE

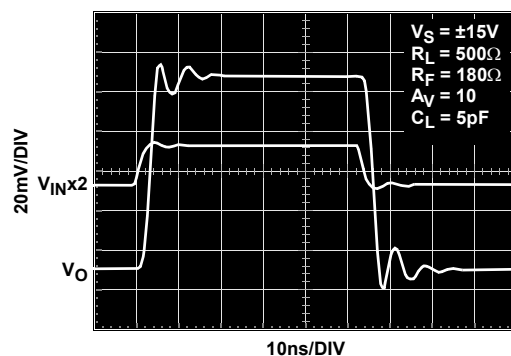


FIGURE 20. SMALL SIGNAL STEP RESPONSE

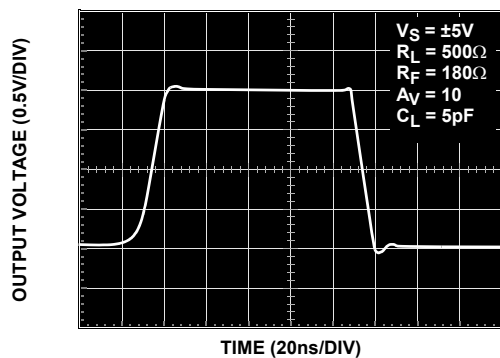


FIGURE 21. LARGE SIGNAL STEP RESPONSE

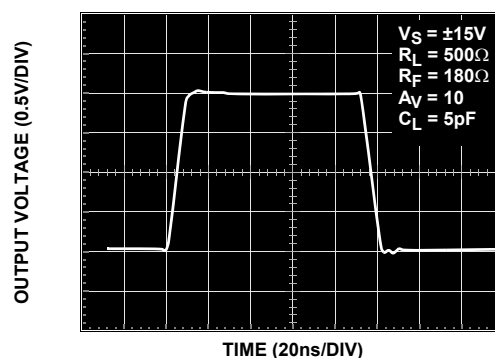


FIGURE 22. LARGE SIGNAL STEP RESPONSE

# Typical Performance Curves (Continued)

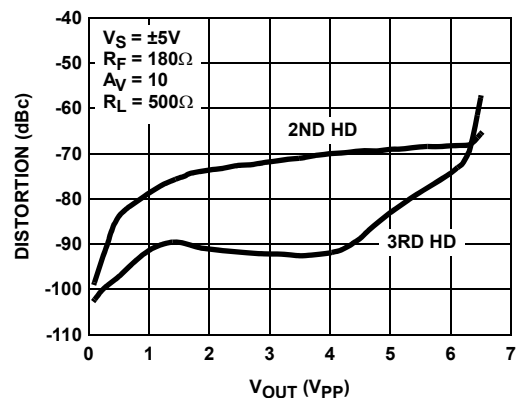


FIGURE 23. 1MHz HARMONIC DISTORTION vs OUTPUT SWING

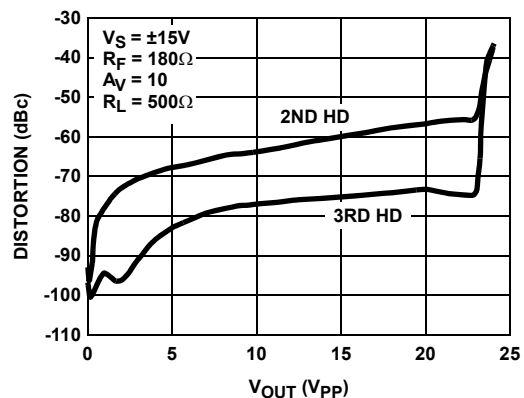


FIGURE 24. 1MHz HARMONIC DISTORTION vs OUTPUT SWING

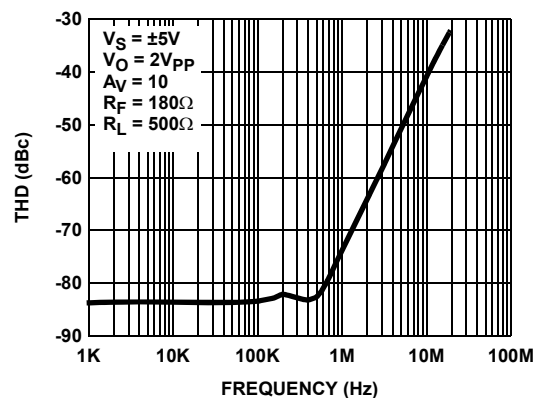


FIGURE 25. TOTAL HARMONIC DISTORTION vs FREQUENCY

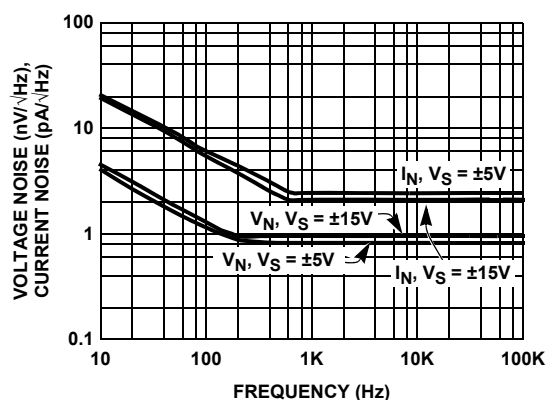


FIGURE 26. VOLTAGE AND CURRENT NOISE vs FREQUENCY

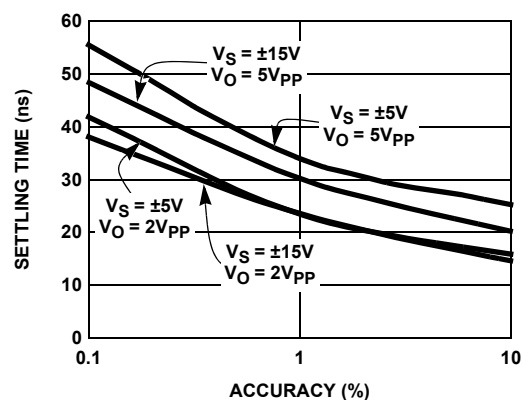


FIGURE 27. SETTLING TIME vs ACCURACY

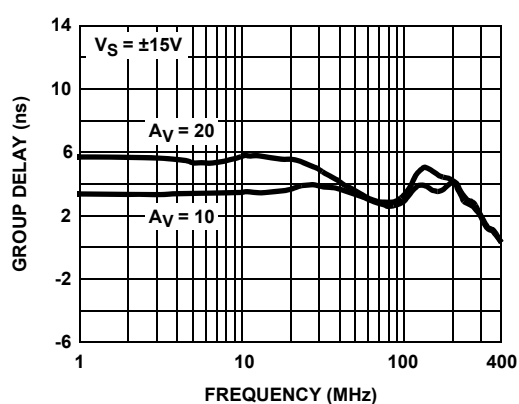


FIGURE 28. GROUP DELAY



# Typical Performance Curves (Continued)

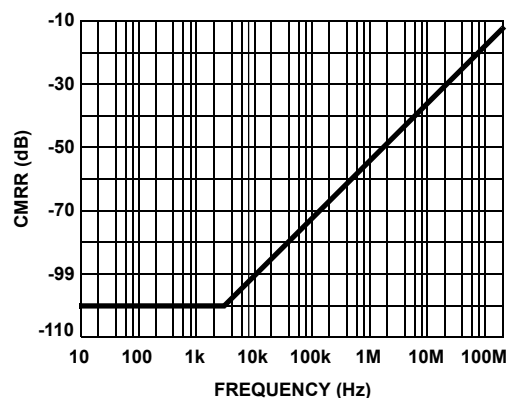


FIGURE 29. CMRR

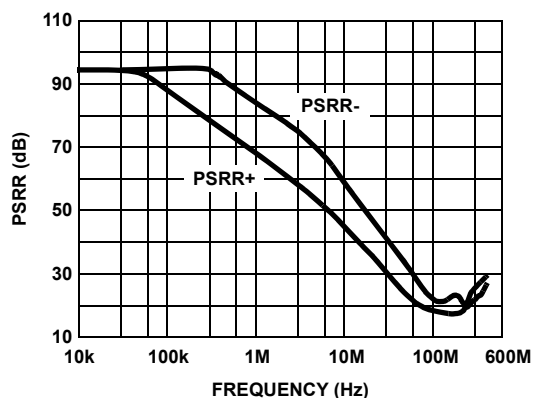


FIGURE 30. PSRR

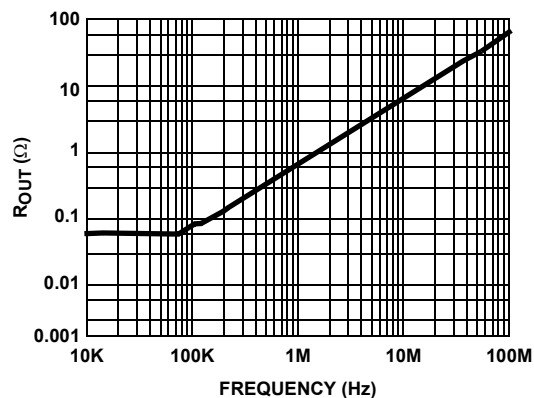


FIGURE 31. CLOSED LOOP OUTPUT IMPEDANCE vs FREQUENCY

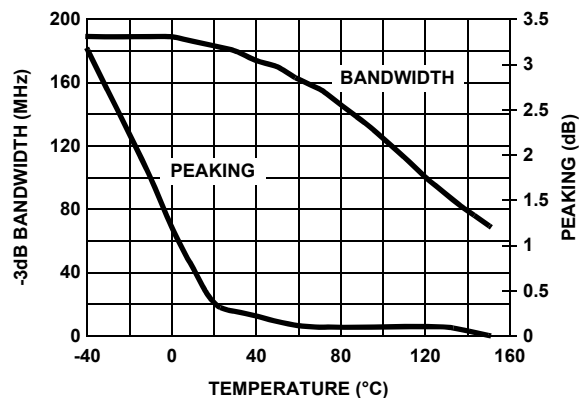


FIGURE 32. BANDWIDTH vs TEMPERATURE

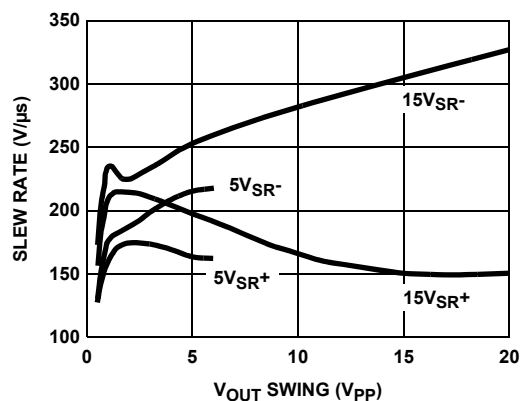


FIGURE 33. SLEW RATE vs SWING

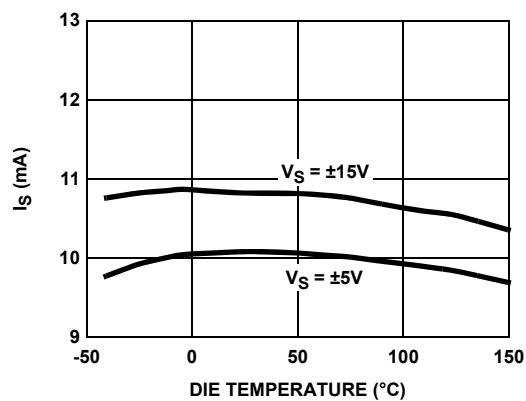


FIGURE 34. SUPPLY CURRENT vs TEMPERATURE

## Typical Performance Curves (Continued)

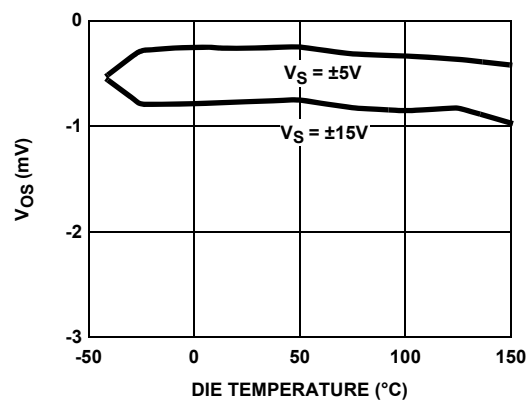


FIGURE 35. OFFSET VOLTAGE vs TEMPERATURE

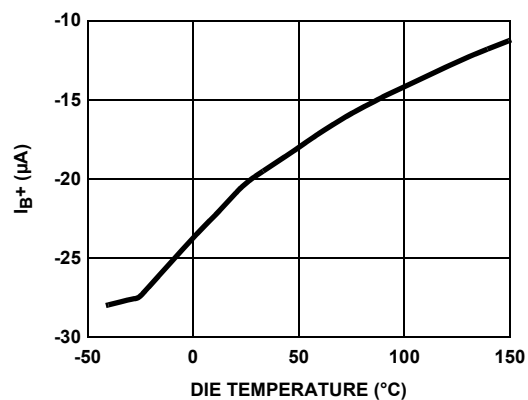


FIGURE 36. INPUT BIAS CURRENT vs TEMPERATURE

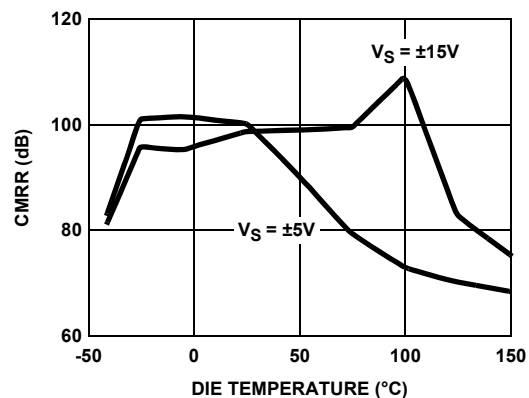


FIGURE 37. CMRR vs TEMPERATURE

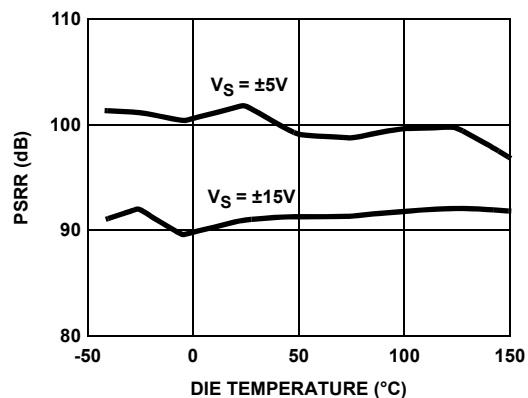


FIGURE 38. PSRR vs TEMPERATURE

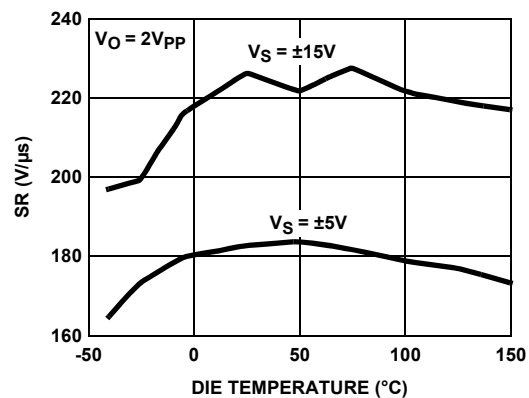


FIGURE 39. SLEW RATE vs TEMPERATURE

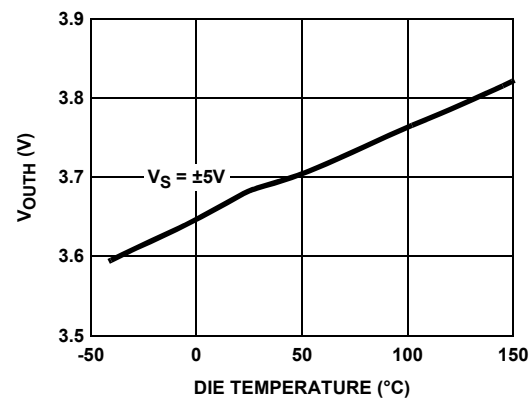


FIGURE 40. POSITIVE OUTPUT SWING vs TEMPERATURE

## Typical Performance Curves (Continued)

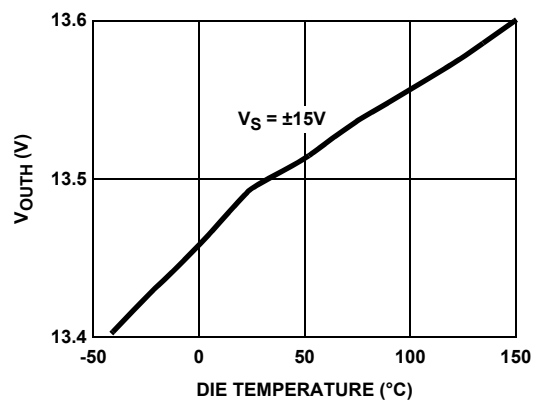


FIGURE 41. POSITIVE OUTPUT SWING vs TEMPERATURE

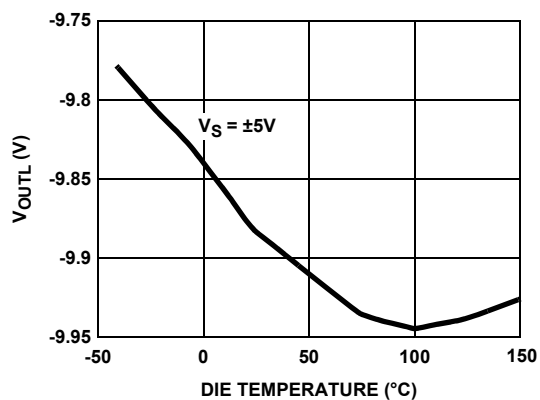


FIGURE 42. NEGATIVE OUTPUT SWING vs TEMPERATURE

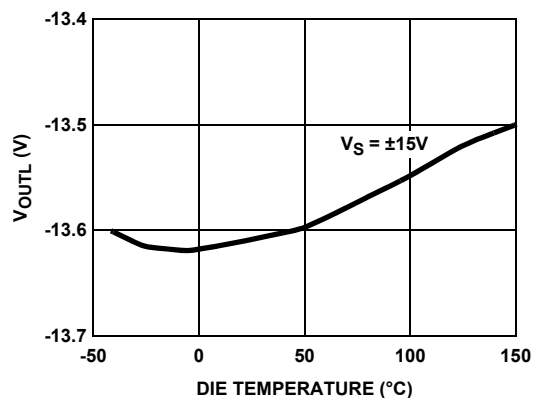


FIGURE 43. NEGATIVE OUTPUT SWING vs TEMPERATURE

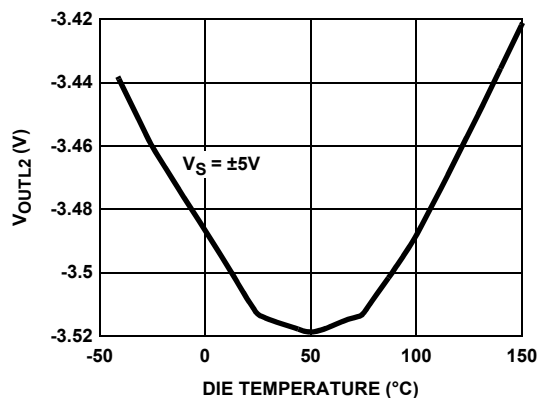


FIGURE 44. LOADED NEGATIVE OUTPUT SWING vs TEMPERATURE

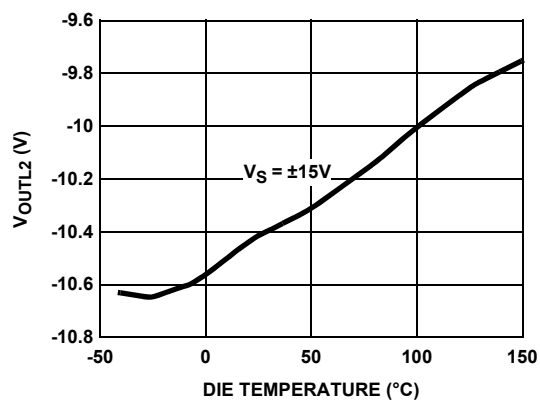


FIGURE 45. NEGATIVE OUTPUT SWING vs TEMPERATURE

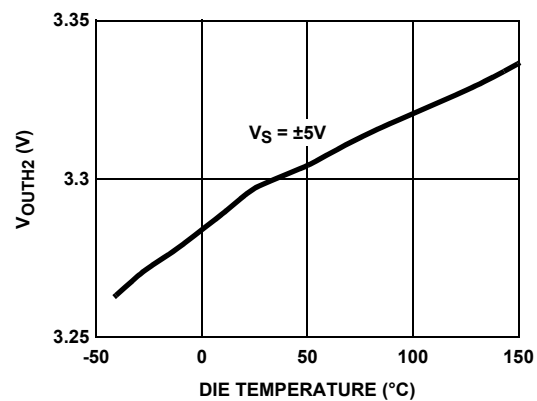


FIGURE 46. LOADED POSITIVE OUTPUT SWING vs TEMPERATURE

Typical Performance Curves (Continued)

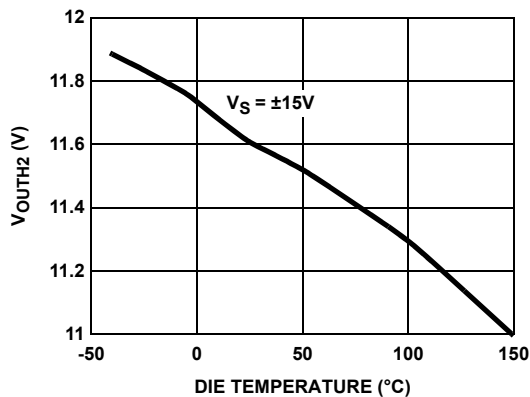


FIGURE 47. LOADED POSITIVE OUTPUT SWING vs TEMPERATURE

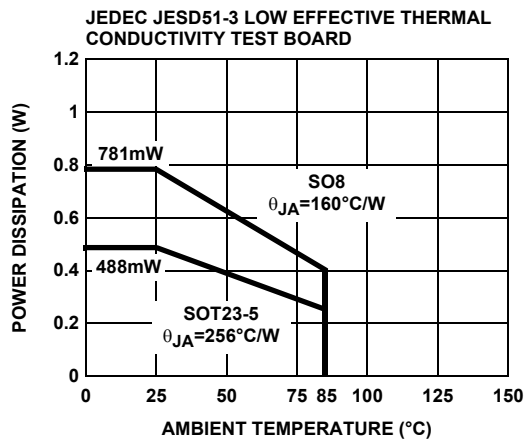


FIGURE 48. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

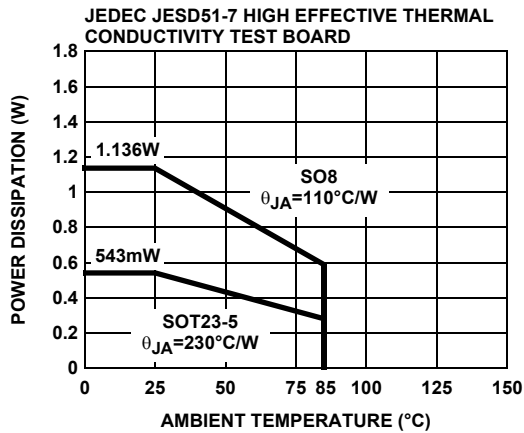




FIGURE 49. PACKAGE POWER DISSIPATION vs AMBIENT TEMPERATURE

## Pin Descriptions

| 5 LD SOT-23 | 8 LD SO | PIN NAME | PIN FUNCTION | EQUIVALENT CIRCUIT                                                                                   |
|-------------|---------|----------|--------------|------------------------------------------------------------------------------------------------------|
| 1           | 6       | VOUT     | Output       |  <p>CIRCUIT 1</p> |
| 2           | 4       | VS-      | Supply       |                                                                                                      |
| 3           | 3       | VINA+    | Input        |  <p>CIRCUIT 2</p> |
| 4           | 2       | VINA-    | Input        | Reference Circuit 2                                                                                  |
| 5           | 7       | VS+      | Supply       |                                                                                                      |

## Applications Information

### Product Description

The EL2125 is an ultra-low noise, wideband monolithic operational amplifier built on Elantec's proprietary high speed complementary bipolar process. It features 0.83nV/ $\sqrt{\text{Hz}}$  input voltage noise, 200 $\mu\text{V}$  offset voltage, and 73dB THD. It is intended for use in systems such as ultrasound imaging where very small signals are needed to be amplified. The EL2125 also has excellent DC specifications: 200 $\mu\text{V}$   $V_{OS}$ , 22 $\mu\text{A}$   $I_B$ , 0.4 $\mu\text{A}$   $I_{OS}$ , and 106dB CMRR. These specifications allow the EL2125 to be used in DC-sensitive applications such as difference amplifiers.

### Gain-Bandwidth Product

The EL2125 has a gain-bandwidth product of 800MHz at  $\pm 5\text{V}$ . For gains greater than 20, its closed-loop -3dB bandwidth is approximately equal to the gain-bandwidth product divided by the small signal gain of the circuit. For gains less than 20, higher-order poles in the amplifier's transfer function contribute to even higher closed-loop bandwidths. For example, the EL2125 has a -3dB bandwidth of 175MHz at a gain of 10 and decreases to 40MHz at gain of 20. It is important to note that the extra bandwidth at lower gain does not come at the expenses of stability. Even though the EL2125 is designed for gain > 10 with external

compensation, the device can also operate at lower gain settings. The RC network shown in Figure 50 reduces the feedback gain at high frequency and thus maintains the amplifier stability. R values must be less than  $R_F$  divided by 9 and 1 divided by  $2\pi RC$  must be less than 400MHz.

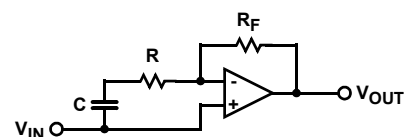


FIGURE 50.

### Choice of Feedback Resistor, $R_F$

The feedback resistor forms a pole with the input capacitance. As this pole becomes larger, phase margin is reduced. This increases ringing in the time domain and peaking in the frequency domain. Therefore,  $R_F$  has some maximum value which should not be exceeded for optimum performance. If a large value of  $R_F$  must be used, a small capacitor in the few pF range in parallel with  $R_F$  can help to reduce this ringing and peaking at the expense of reducing the bandwidth. Frequency response curves for various  $R_F$  values are shown in the typical performance curves section of this data sheet.

### Noise Calculations

The primary application for the EL2125 is to amplify very small signals. To maintain the proper signal-to-noise ratio, it is essential to minimize noise contribution from the amplifier. Figure 51 below shows all the noise sources for all the components around the amplifier.

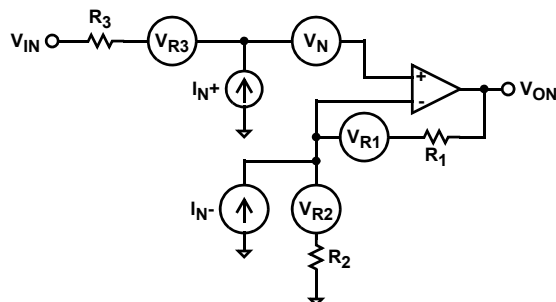


FIGURE 51.

- $V_N$  is the amplifier input voltage noise
- $I_{N+}$  is the amplifier positive input current noise
- $I_{N-}$  is the amplifier negative input current noise
- $V_{RX}$  is the thermal noise associated with each resistor:

$$V_{RX} = \sqrt{4kTR_x}$$

where:

- $k$  is Boltzmann's constant =  $1.380658 \times 10^{-23}$
- $T$  is temperature in degrees Kelvin ( $273 + ^\circ\text{C}$ )

The total noise due to the amplifier seen at the output of the amplifier can be calculated by using the equation below (Figure 52).

As the equation shows, to keep noise at a minimum, small resistor values should be used. At higher amplifier gain configuration where  $R_2$  is reduced, the noise due to  $I_{N-}$ ,  $R_2$ , and  $R_1$  decreases and the noise caused by  $I_{N+}$ ,  $V_N$ , and  $R_3$  starts to dominate. Because noise is summed in a root-mean-squares method, noise sources smaller than 25% of the largest noise source can be ignored. This can greatly simplify the formula and make noise calculation much easier to calculate.

### Output Drive Capability

The EL2125 is designed to drive low impedance load. It can easily drive 6V<sub>P-P</sub> signal into a 100Ω load. This high output drive capability makes the EL2125 an ideal choice for RF, IF, and video applications. Furthermore, the EL2125 is current-limited at the output, allowing it to withstand momentary short to ground. However, the power dissipation with output-shortened cannot exceed the power dissipation capability of the package.

### Driving Cables and Capacitive Loads

Although the EL2125 is designed to drive low impedance load, capacitive loads will decrease the amplifier's phase margin. As shown in the performance curves, capacitive load can result in peaking, overshoot and possible oscillation. For optimum AC performance, capacitive loads should be reduced as much as possible or isolated with a series resistor between 5Ω to 20Ω. When driving coaxial cables, double termination is always recommended for reflection-free performance. When properly terminated, the capacitance of the coaxial cable will not add to the capacitive load seen by the amplifier.

### Power Supply Bypassing And Printed Circuit Board Layout

As with any high frequency devices, good printed circuit board layout is essential for optimum performance. Ground plane construction is highly recommended. Lead lengths should be kept as short as possible. The power supply pins must be closely bypassed to reduce the risk of oscillation. The combination of a 4.7μF tantalum capacitor in parallel with 0.1μF ceramic capacitor has been proven to work well when placed at each supply pin. For single supply operation, where pin 4 ( $V_{S-}$ ) is connected to the ground plane, a single 4.7μF tantalum capacitor in parallel with a 0.1μF ceramic capacitor across pins 7 ( $V_{S+}$ ) and pin 4 ( $V_{S-}$ ) will suffice.

For good AC performance, parasitic capacitance should be kept to a minimum. Ground plane construction again should be used. Small chip resistors are recommended to minimize series inductance. Use of sockets should be avoided since they add parasitic inductance and capacitance which will result in additional peaking and overshoot.

### Supply Voltage Range and Single Supply Operation


The EL2125 has been designed to operate with supply voltage range of ±2.5V to ±15V. With a single supply, the EL2125 will operate from +5V to +30V. Pins 4 and 7 are the power supply pins. The positive power supply is connected to pin 7. When used in single supply mode, pin 4 is connected to ground. When used in dual supply mode, the negative power supply is connected to pin 4.

As the power supply voltage decreases from +30V to +5V, it becomes necessary to pay special attention to the input voltage range. The EL2125 has an input voltage range of 0.4V from the negative supply to 1.2V from the positive supply. So, for example, on a single +5V supply, the EL2125 has an input voltage range which spans from 0.4V to 3.8V. The output range of the EL2125 is also quite large, on a +5V supply, it swings from 0.4V to 3.6V.

$$V_{ON} = \sqrt{BW} \times \sqrt{\left( V_N^2 \times \left( 1 + \frac{R_1}{R_2} \right)^2 + I_{N-}^2 \times R_1^2 + I_{N+}^2 \times R_3^2 \times \left( 1 + \frac{R_1}{R_2} \right)^2 + 4 \times K \times T \times R_1 + 4 \times K \times T \times R_2 \times \left( \frac{R_1}{R_2} \right)^2 + 4 \times K \times T \times R_3 \times \left( 1 + \frac{R_1}{R_2} \right)^2 \right)}$$

FIGURE 52.

## Small Outline Package Family (SO)

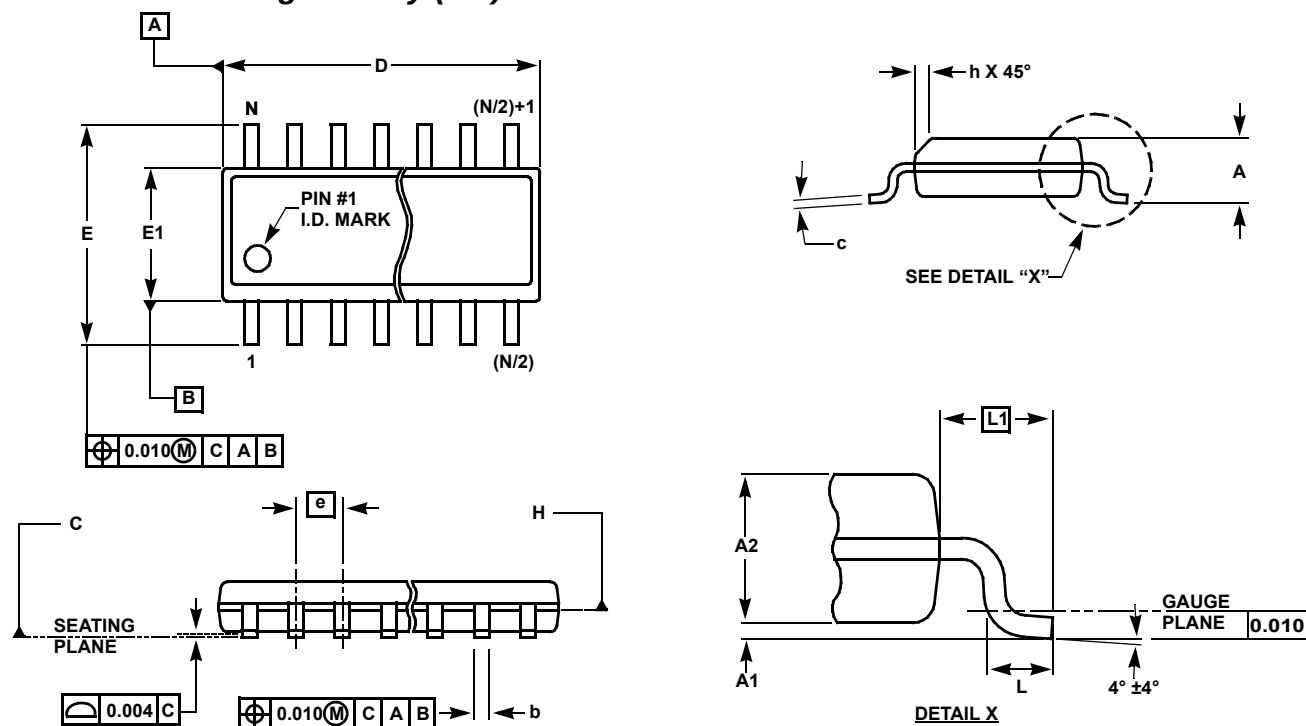

### MDP0027

#### SMALL OUTLINE PACKAGE FAMILY (SO)




| SYMBOL | INCHES |       |                  |                           |                  |                  |                  | TOLERANCE | NOTES |
|--------|--------|-------|------------------|---------------------------|------------------|------------------|------------------|-----------|-------|
|        | SO-8   | SO-14 | SO16<br>(0.150") | SO16 (0.300")<br>(SOL-16) | SO20<br>(SOL-20) | SO24<br>(SOL-24) | SO28<br>(SOL-28) |           |       |
| A      | 0.068  | 0.068 | 0.068            | 0.104                     | 0.104            | 0.104            | 0.104            | MAX       | -     |
| A1     | 0.006  | 0.006 | 0.006            | 0.007                     | 0.007            | 0.007            | 0.007            | ±0.003    | -     |
| A2     | 0.057  | 0.057 | 0.057            | 0.092                     | 0.092            | 0.092            | 0.092            | ±0.002    | -     |
| b      | 0.017  | 0.017 | 0.017            | 0.017                     | 0.017            | 0.017            | 0.017            | ±0.003    | -     |
| c      | 0.009  | 0.009 | 0.009            | 0.011                     | 0.011            | 0.011            | 0.011            | ±0.001    | -     |
| D      | 0.193  | 0.341 | 0.390            | 0.406                     | 0.504            | 0.606            | 0.704            | ±0.004    | 1, 3  |
| E      | 0.236  | 0.236 | 0.236            | 0.406                     | 0.406            | 0.406            | 0.406            | ±0.008    | -     |
| E1     | 0.154  | 0.154 | 0.154            | 0.295                     | 0.295            | 0.295            | 0.295            | ±0.004    | 2, 3  |
| e      | 0.050  | 0.050 | 0.050            | 0.050                     | 0.050            | 0.050            | 0.050            | Basic     | -     |
| L      | 0.025  | 0.025 | 0.025            | 0.030                     | 0.030            | 0.030            | 0.030            | ±0.009    | -     |
| L1     | 0.041  | 0.041 | 0.041            | 0.056                     | 0.056            | 0.056            | 0.056            | Basic     | -     |
| h      | 0.013  | 0.013 | 0.013            | 0.020                     | 0.020            | 0.020            | 0.020            | Reference | -     |
| N      | 8      | 14    | 16               | 16                        | 20               | 24               | 28               | Reference | -     |

Rev. M 2/07

#### NOTES:

1. Plastic or metal protrusions of 0.006" maximum per side are not included.
2. Plastic interlead protrusions of 0.010" maximum per side are not included.
3. Dimensions "D" and "E1" are measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994

## SOT-23 Package Family

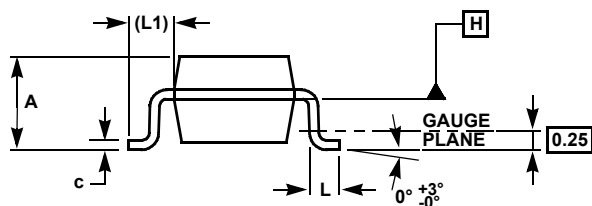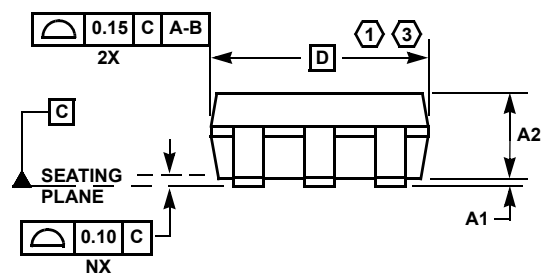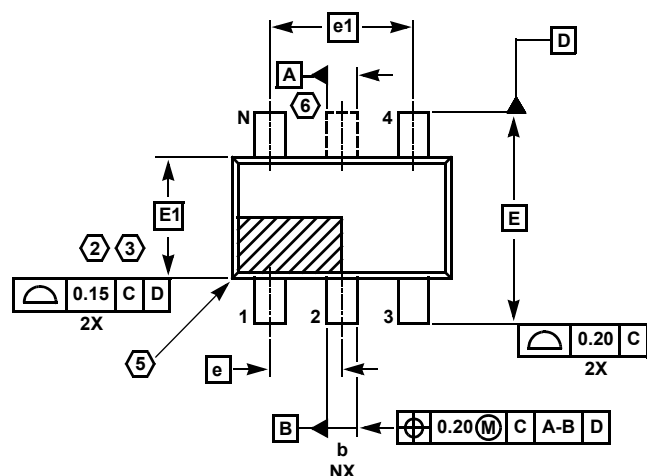

### MDP0038

#### SOT-23 PACKAGE FAMILY

| SYMBOL | MILLIMETERS |         | TOLERANCE |
|--------|-------------|---------|-----------|
|        | SOT23-5     | SOT23-6 |           |
| A      | 1.45        | 1.45    | MAX       |
| A1     | 0.10        | 0.10    | ±0.05     |
| A2     | 1.14        | 1.14    | ±0.15     |
| b      | 0.40        | 0.40    | ±0.05     |
| c      | 0.14        | 0.14    | ±0.06     |
| D      | 2.90        | 2.90    | Basic     |
| E      | 2.80        | 2.80    | Basic     |
| E1     | 1.60        | 1.60    | Basic     |
| e      | 0.95        | 0.95    | Basic     |
| e1     | 1.90        | 1.90    | Basic     |
| L      | 0.45        | 0.45    | ±0.10     |
| L1     | 0.60        | 0.60    | Reference |
| N      | 5           | 6       | Reference |

Rev. F 2/07

#### NOTES:

1. Plastic or metal protrusions of 0.25mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25mm maximum per side are not included.
3. This dimension is measured at Datum Plane "H".
4. Dimensioning and tolerancing per ASME Y14.5M-1994.
5. Index area - Pin #1 I.D. will be located within the indicated zone (SOT23-6 only).
6. SOT23-5 version has no center lead (shown as a dashed line).

© Copyright Intersil Americas LLC 2003-2007. All Rights Reserved.  
All trademarks and registered trademarks are the property of their respective owners.

For additional products, see [www.intersil.com/en/products.html](http://www.intersil.com/en/products.html)

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at [www.intersil.com/en/support/qualandreliability.html](http://www.intersil.com/en/support/qualandreliability.html)

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)