



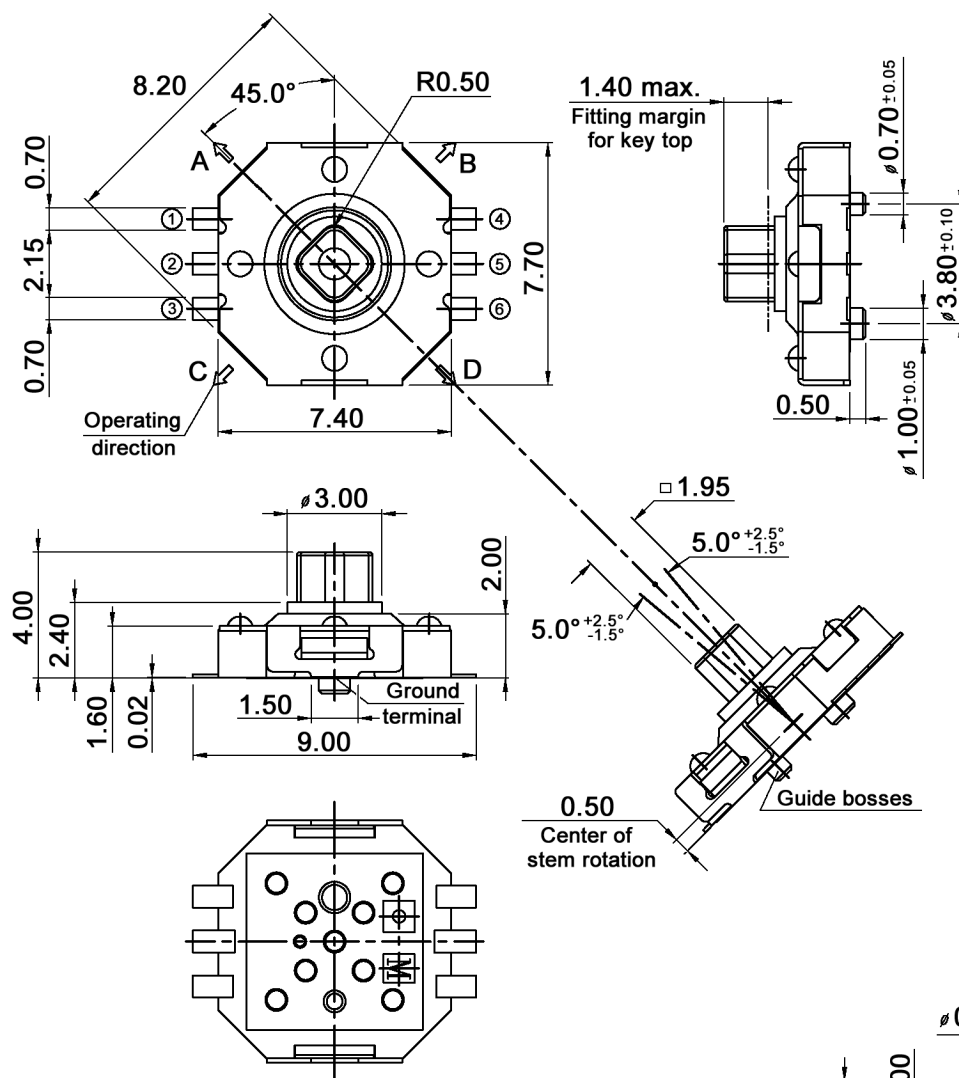


DIAGRAM CIRCUIT

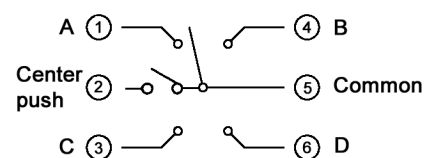

P.C.B. LAYOUT

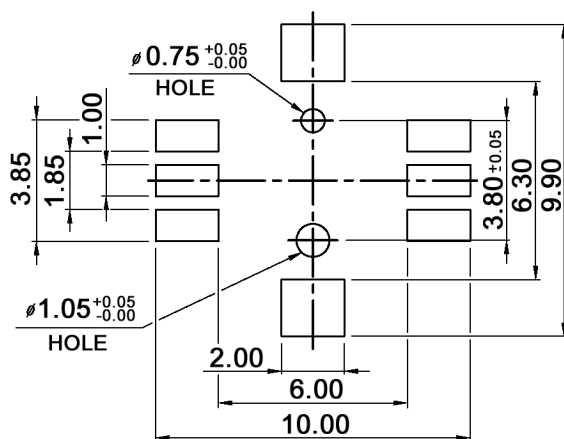

Specifications:

Contact rating: 50mA, 12V DC
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min.
 Dielectric strength: 250V AC (50 or 60 Hz) for 1 minute
 Operating temperature: -20°C to +70°C
 Storage temperature: -40°C to +85°C
 Operating force: center: 320 +/-50g; 4 directions: 160 +/-50g
 Mechanical life: 100 000 cycles min.
 Soldering temperature: peak 255°C / max. 10sec., >250°C
 Material: Cover: C7701RH
 Stem: high-temp. thermoplastic LCP
 Contact: SUS301CSP-EH
 Termianl: C5210R-H, with silver plated
 Base: high-temp. thermoplastic LCP, black

Maßstab		Datum	Name	TSSJ 5	
Oberfläche		09/05	dr		
				30 06 39	
				Blatt	
				1/1	
Zust	Änderung	Datum	Name		

knitter-switch