


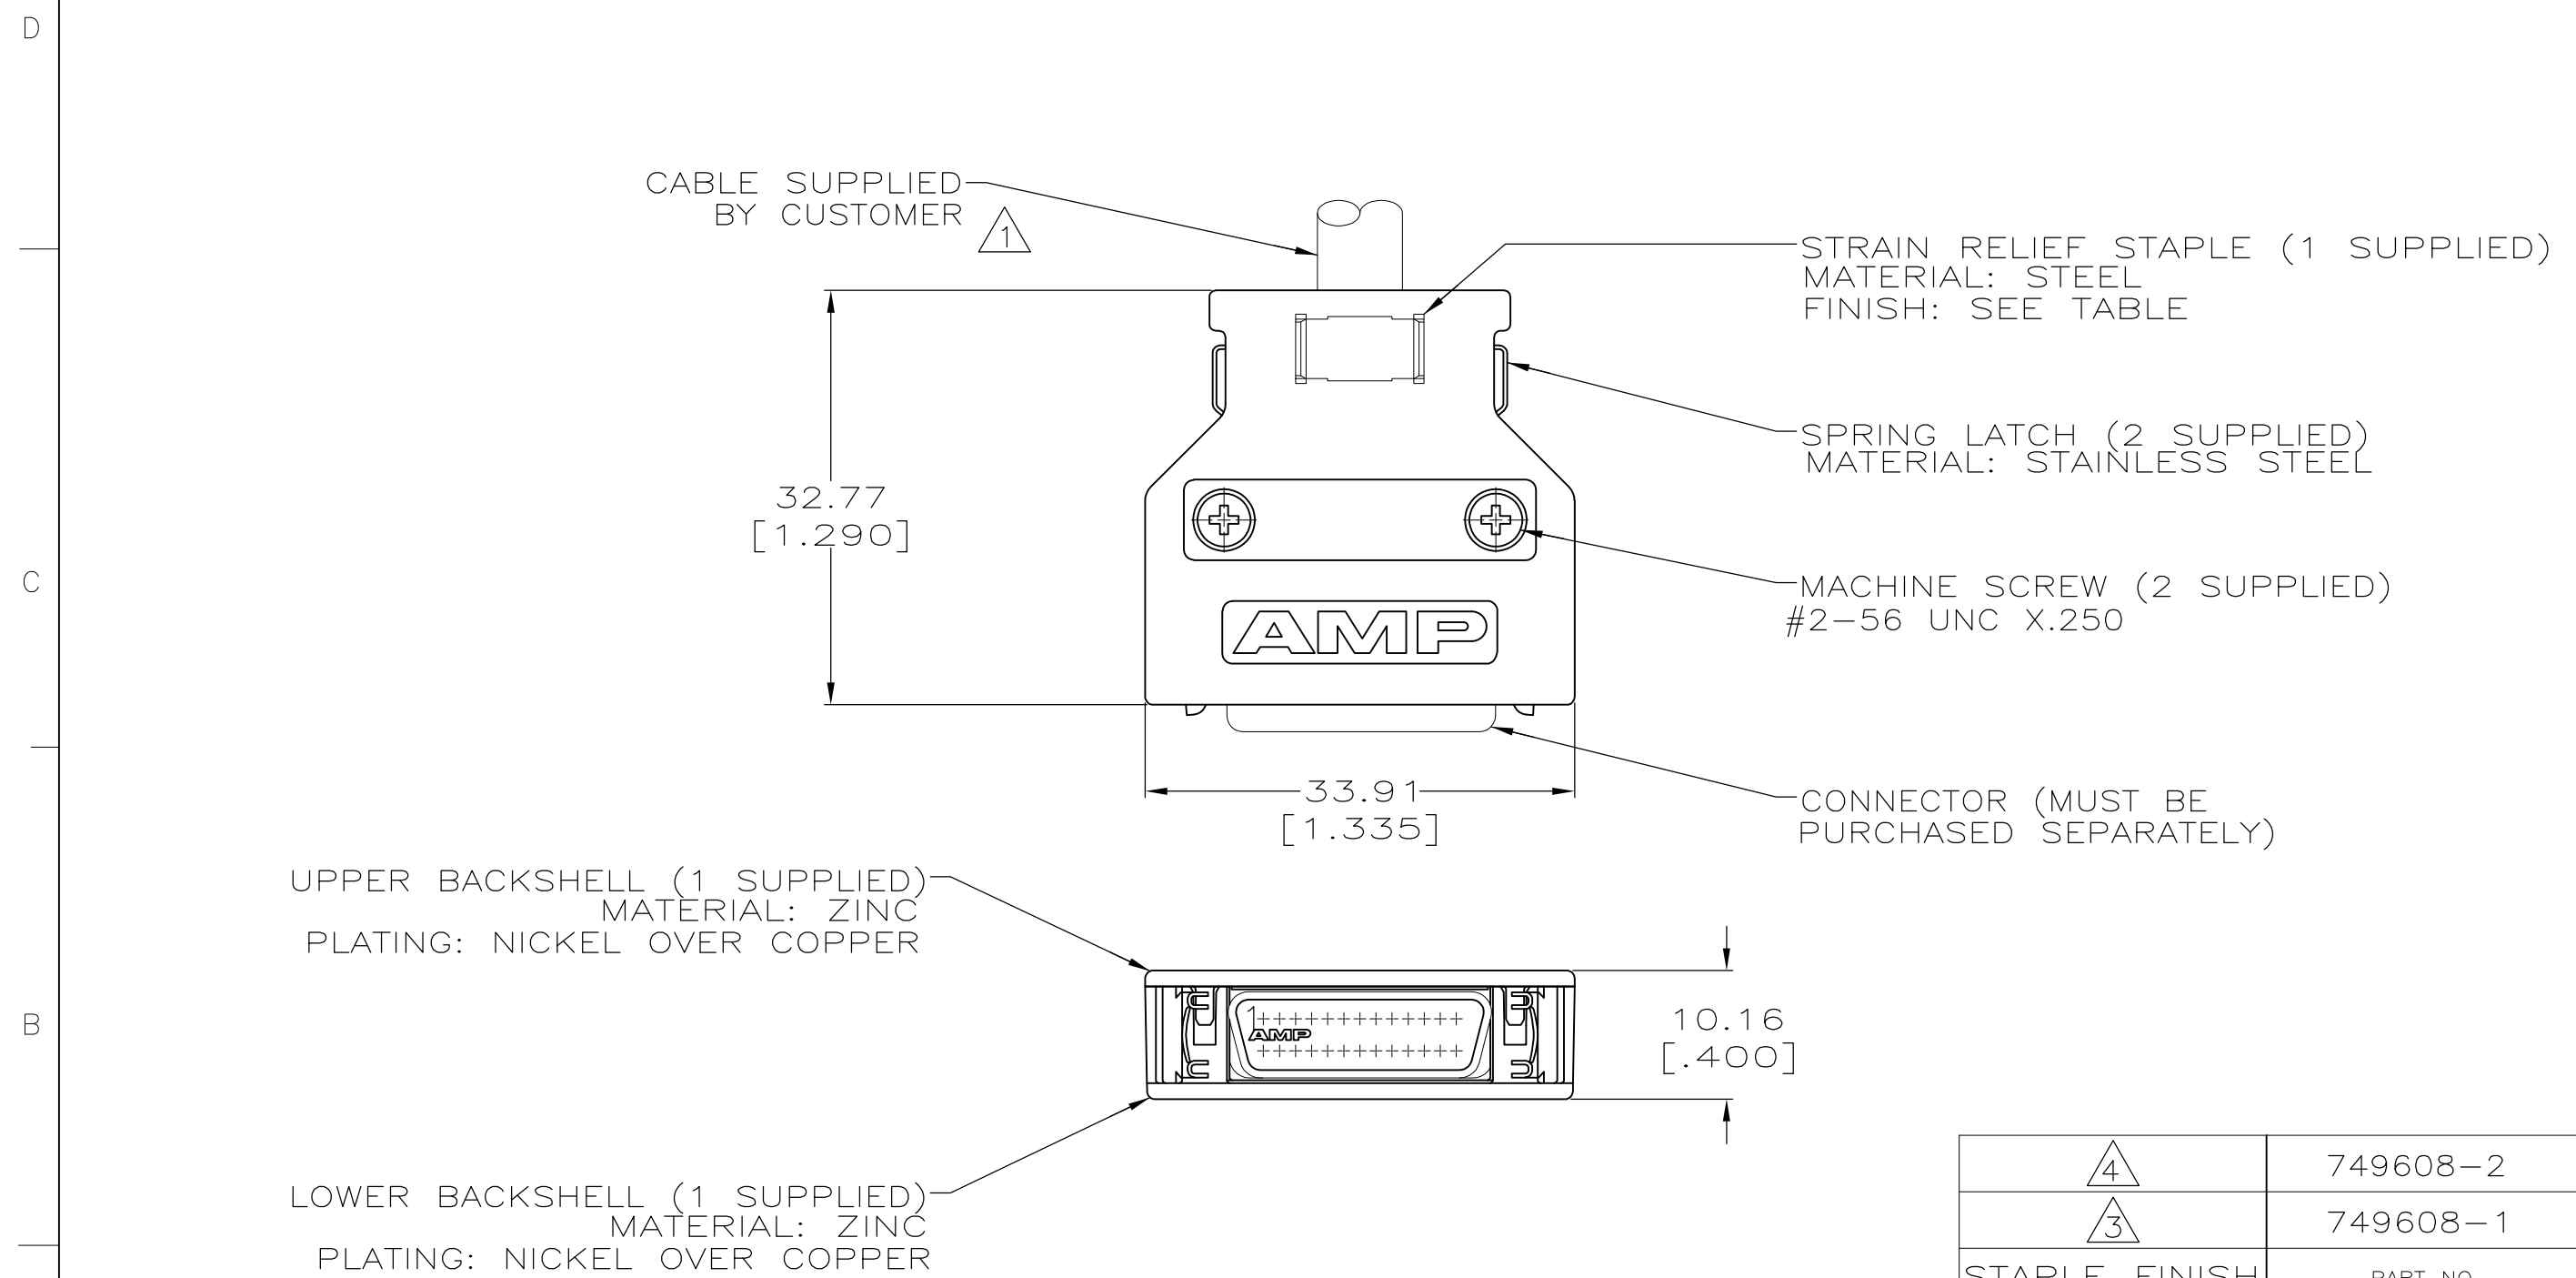

- 1 .270 MAX CABLE DIA
 - 2. DIMENSIONS IN BRACKETS ARE IN INCHES.
 - 3 BRIGHT TIN-LEAD OVER NICKEL.
 - 4 BRIGHT TIN OVER NICKEL.
- METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm[INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.38 [.015] 4 PLC ANGLES ± -	DWN M.MCCAFFREY 05/08/89	TE Connectivity		
		CHK M.E.SHIRK 05/11/89			
		APVD J.BROSCHARD 05/23/89	NAME INDIVIDUAL KIT, 26 POSITION, REDUCED WIDTH, STRAIGHT EXIT, UNKEYED, AMPLIMITE .050 Series		
		PRODUCT SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO C-749608
		APPLICATION SPEC —	RESTRICTED TO —		
		WEIGHT —			
		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 of 1	REV A1