



June 2015

Multilayer Band Pass Filter

For 2300-2690MHz

DEA162495BT-1289A1

1.6x0.8mm [EIA 0603]*

* Dimensions Code JIS[EIA]

Multilayer Band Pass Filter


For 2300-2690MHz

Conformity to RoHS Directive


DEA162495BT-1289A1

■ SHAPES AND DIMENSIONS

[Top view]

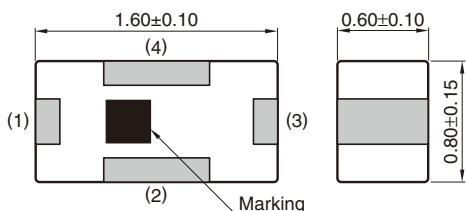


[Bottom view]

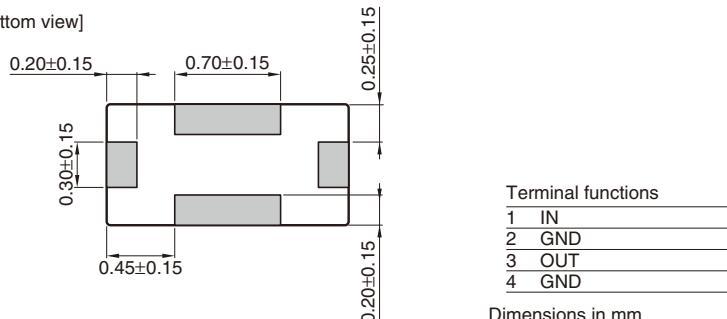

Dimensions in mm

■ RECOMMENDED LAND PATTERN

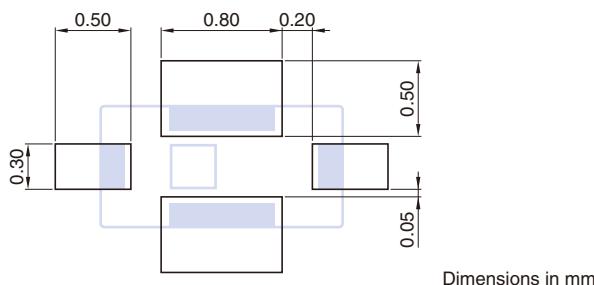

Dimensions in mm

○ RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. <http://product.tdk.com/en/environment/rohs/>

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

DEA162495BT-1289A1

ELECTRICAL CHARACTERISTICS

| Item | Frequency Range (MHz) | Min. | Typ. | Max. |
|---------------------------------------|-----------------------------|----------|--------------|------|
| Insertion Loss (dB) | 2300 to 2690 | — | 1.4 | 2.0 |
| Return Loss (dB) | 2300 to 2690 | 10 | 23.8 | — |
| Attenuation (dB) | 100 to 1800 3600 to 4000 | 12 25 | 17 33 | — |
| Characteristic Impedance (Ω) | | | 50 (Nominal) | |

• Ta: +25±5°C

TEMPERATURE RANGE


| Operating temperature (°C) | Storage temperature (°C) |
|-------------------------------|-----------------------------|
| -40 to +85 | -40 to +85 |

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.


DEA162495BT-1289A1

■ FREQUENCY CHARACTERISTICS


□ INSERTION LOSS

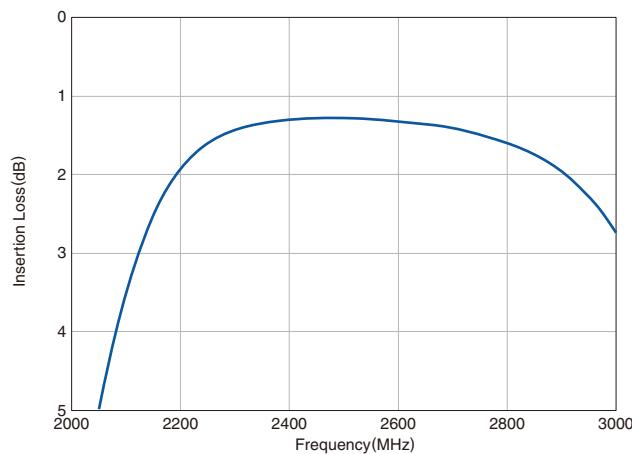

□ ATTENUATION

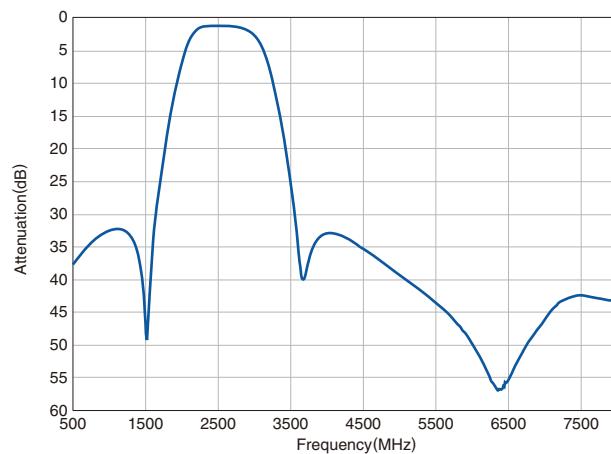


□ RETURN LOSS

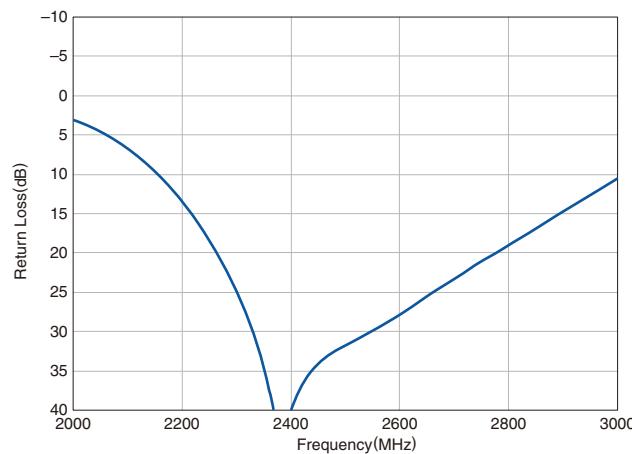

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.

■ RECOMMENDED REFLOW PROFILE

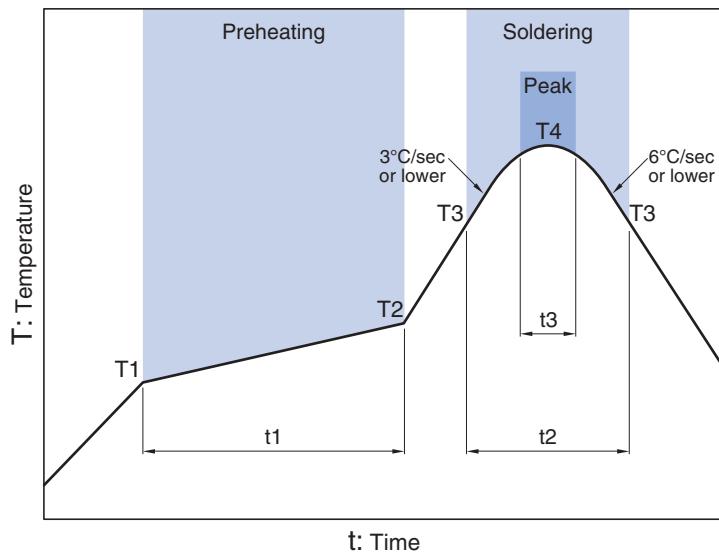

| Preheating | | | Soldering | | Peak | |
|----------------|----------------|-----------------------|--------------------------|-----------------------|-----------------------|-----------------------|
| | | | Critical zone (T3 to T4) | | | |
| Temp. | Time | | Temp. | Time | Temp. | Time |
| T_1 150°C | T_2 200°C | t_1 60 to 120sec | T_3 217°C | t_2 60 to 120sec | T_4 240 to 260°C | t_3^* 30sec max. |

* t_3 : Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

| | |
|---|--|
| (1) Aerospace/Aviation equipment | (8) Public information-processing equipment |
| (2) Transportation equipment (cars, electric trains, ships, etc.) | (9) Military equipment |
| (3) Medical equipment | (10) Electric heating apparatus, burning equipment |
| (4) Power-generation control equipment | (11) Disaster prevention/crime prevention equipment |
| (5) Atomic energy-related equipment | (12) Safety equipment |
| (6) Seabed equipment | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment | |

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.