




FEATURES


- **Standard 5.0mm x 3.2mm Ceramic Surface Mount Package**
- **Fundamental Crystal Design**
- Frequency Range 6.76438 – 50 MHz
- Frequency Tolerance, ± 30 ppm Standard
[other tolerances available]
- Frequency Stability, ± 50 ppm Standard
[other stabilities available]
- Operating Temperature to -40°C to $+85^{\circ}\text{C}$
- Stable Frequency Over Temperature and Drive Level
- Tape & Reel Packaging Standard, EIA-481-2
- **RoHS/Green Compliant (6/6)**

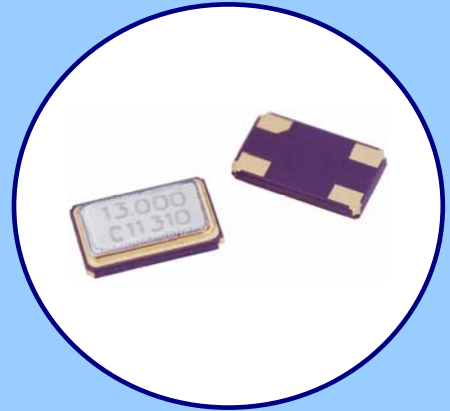

APPLICATIONS

The Model 405 is a seam sealed ceramic packaged crystal offering reduced size, ideal for high-density circuit board applications. M405 offers reliable precision and excellent shock performance suitable for wireless communications, broadband access, WLAN/WiMax/WiFi, portable equipment, test and measurement, PCMCIA, computers and modems.

ORDERING INFORMATION

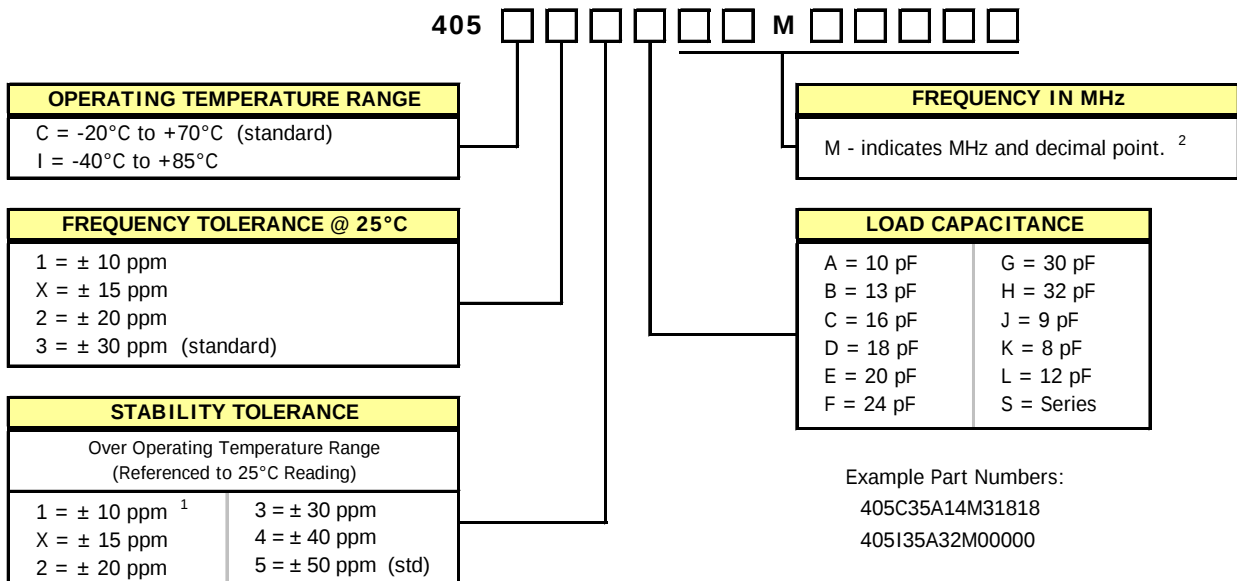

Use form C052 to detail non-standard parameters.

1] Only available with temperature range code "C".

2] Frequency is recorded with two leading digits before the 'M' and 5 significant digits after the 'M' (including zeros).

[Ex. XXMXXXXX (16M38400), XXMXXXXX (14M31818)]

**Not all performance combinations and frequencies may be available.
Contact your local CTS Representative or CTS Customer Service for availability.**

ELECTRICAL CHARACTERISTICS


ELECTRICAL PARAMETERS	PARAMETER	VALUE
	Frequency Range	6.76438 MHz to 50.0 MHz
	Operating Mode	Fundamental
	Crystal Cut	AT-Cut
	Frequency Tolerance @ 25°C	± 30 ppm standard [± 10 ppm, ± 15 ppm and ± 20 ppm Available]
	Frequency Stability Tolerance [Operating Temperature Range, Referenced to 25°C Reading]	-20°C to +70°C standard [± 10 ppm, ± 15 ppm, ± 20 ppm, ± 30 ppm and ± 40 ppm Available]
	Operating Temperature Range	-20°C to +70°C -40°C to +85°C
	Equivalent Series Resistance	See ESR Table
	Load Capacitance or Resonance Mode	See Ordering Information
	Shunt Capacitance (C ₀)	3.0 pF typical 7.0 pF maximum
	Drive Level	10 µW typical 100 µW maximum
	Aging @ +25°C	±3 ppm/yr typical ±5 ppm/yr maximum
	Storage Temperature Range	-55°C to +125°C
	Reflow Condition, per JEDEC J-STD-020	+260°C maximum, 10 Seconds maximum

EQUIVALENT SERIES RESISTANCE TABLE

FREQUENCY RANGE	MODE of OSCILLATION	ESR Maximum
6.76438 MHz - 10.999 MHz	Fundamental	80 Ohms
11.00 MHz - 20.00 MHz	Fundamental	60 Ohms
20.001 MHz - 50.00 MHz	Fundamental	50 Ohms

MECHANICAL SPECIFICATIONS

PACKAGE DRAWING

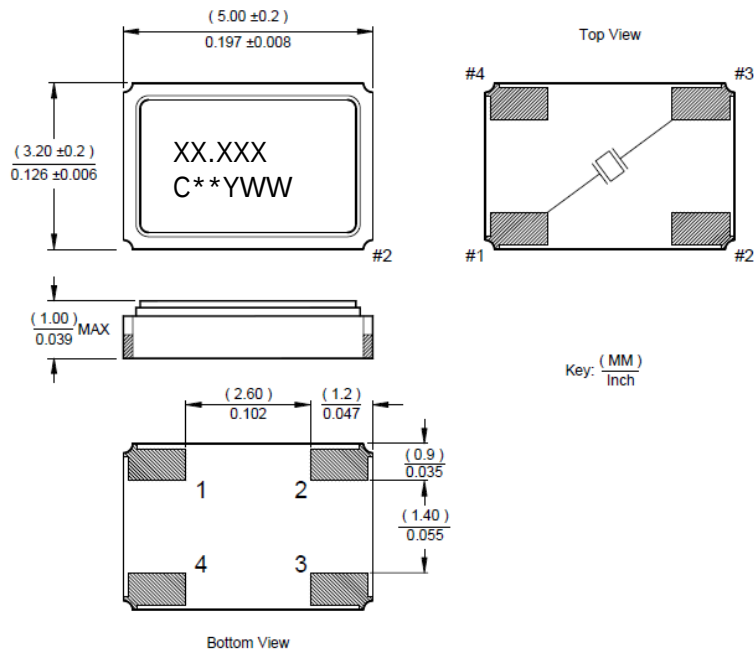


MARKING INFORMATION

- XX.XXX – Frequency marked with 3 significant digits after the decimal.
- C – CTS and Pin 1 identifier.
- ** - Manufacturing Site Code.
- YWW – Date Code, Y – Last Digit of Year, WW – Week.
- Complete CTS part number, frequency value and date code information must appear on reel and box labels.

NOTES

- Complete CTS part number, frequency value and date code information must appear on reel and carton labels.
- Termination pads (e4); barrier plating is nickel (Ni) with gold (Au) flash plate.
- Terminations #2, #4 and metal lid are connected internally and may be connected to ground for EMI suppression.
- Reflow conditions per JEDEC J-STD-020, 260°C maximum.


SUGGESTED SOLDER PAD GEOMETRY

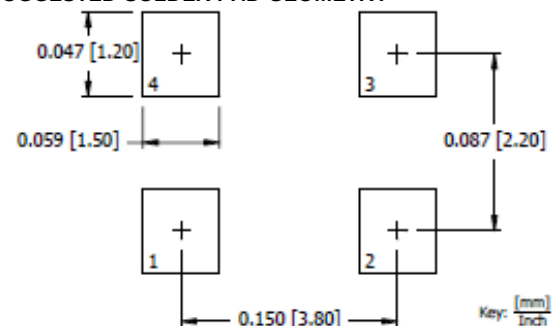

PACKAGING INFORMATION


Device quantity is 1,000 pieces per 180mm reel.

DIMENSIONS IN MILLIMETERS

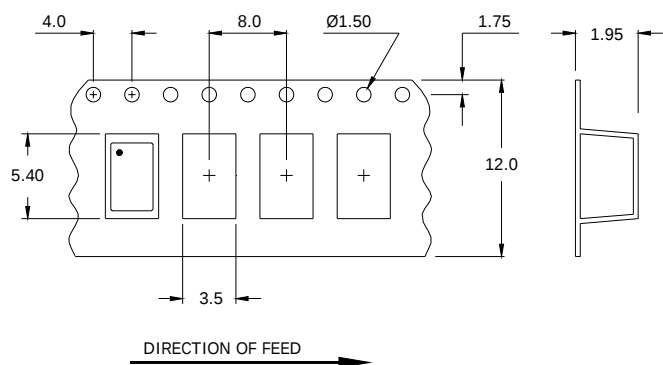

ENVIRONMENTAL SPECIFICATIONS

Temperature Cycle:	400 cycles from -55°C to between temperatures.
Mechanical Shock:	1,500g's, 0.5mS duration, planes (18 total shocks).
Sinusoidal Vibration:	0.06 inches double amplitude perpendicular planes (9 times each plane).
Gross Leak:	No leak shall appear while in service.
Fine Leak:	Mass spectrometer leak rates less than 2×10^{-8} ATM cc/sec air equivalent.
Resistance to Solder Heat:	Product must survive 3 reflows of $+250^{\circ}\text{C}$ maximum, 10 seconds maximum.
High Temperature Operating Bias:	2,000 hours at $+125^{\circ}\text{C}$, disregarding frequency shift.
Frequency Aging:	1,000 hours at $+85^{\circ}\text{C}$.
Insulation Resistance:	500M Ohms @ $100V_{\text{DC}} \pm 15V_{\text{DC}}$.
Moisture Sensitivity Level:	Level 1 per JEDEC J-STD-020.

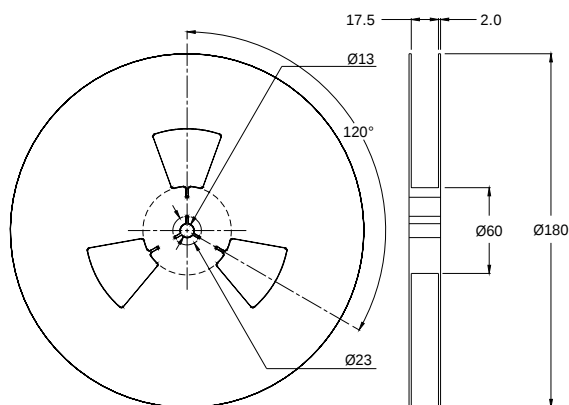

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CTS:

405C35B11M05920	405C35B12M00000	405C35B12M80000	405C35B13M00000	405C35B14M31818
405C35B14M40000	405C35B14M74560	405C35B15M36000	405C35B16M00000	405C35B16M36800
405C35B19M20000	405C35B19M68000	405C35B20M00000	405C35B24M00000	405C35B25M00000
405C35B26M00000	405C35B32M00000	405C35B33M00000	405C35B40M00000	405C35B44M00000
405C24A13M00000	405C35A12M00000	405C35A13M00000	405I35D12M00000	405C35E16M00000
405I35D16M00000	405C35C24M00000	405I35S13M00000	405I35S16M00000	405C35C48M00000
405C35D25M00000	405C35D12M00000	405I35E18M43200	405C35B27M00000	405I35A40M00000
405I35D25M00000	405C35F24M00000	405I35B24M00000	405I35D24M00000	405C35L16M38400
405C35E40M00000	405C35L16M66660	405I35B16M00000	405I35B25M00000	405C35E12M00000
405I35A19M20000	405C35C12M00000	405C35C24M57600	405C35E25M00000	405I35E25M00000
405I35D18M43200	405I35A25M00000	405C35B48M00000	405C35B18M43200	405C35B13M56000
405C35B30M00000	405C11A11M05920	405C11A12M28800	405C11A12M80000	405C11A13M00000
405C11A13M50000	405C11A13M56000	405C11A14M40000	405C11A14M74560	405C11A15M36000
405C11A16M38400	405C11A16M80000	405C11A18M43200	405C11A19M20000	405C11A19M44000
405C11A19M68000	405C11A19M80000	405C11A22M00000	405C11A24M57600	405C11A26M00000
405C11A28M63636	405C11A29M49120	405C11A30M00000	405C11A44M00000	405C11A48M00000
405C35D10M00000	405C35D12M28800	405C35D13M00000	405C35D13M82400	405C35D14M31818
405C35D15M36000	405C35D16M38400	405C35D18M43200	405C35D24M57600	405C35D32M00000
405C35D36M00000	405C35D50M00000	405C35E12M28800	405C35E13M00000	405C35E13M82400
405C35E14M31818	405C35E15M36000	405C35E16M38400	405C35E18M43200	405C35E24M57600