



CLUSTER SOCKET

Three-pole socket for connecting cluster pins

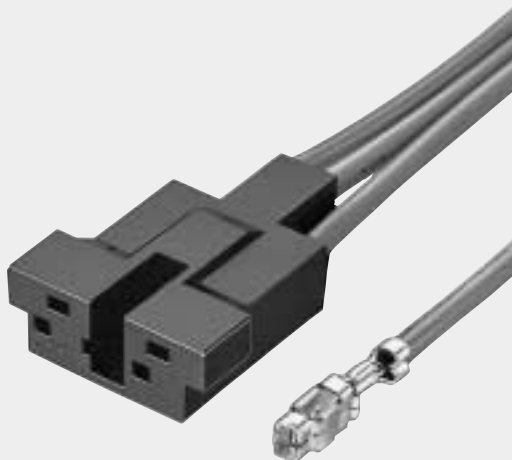


This three circuit connector is used to connect cluster pins {2.3mm (.091") in diameter} to the leads of a motor hermetically sealed in a compressor of a refrigerator or a freezer.

The contacts and housing are especially designed and made of high-quality materials for high heat resistance and superior durability.

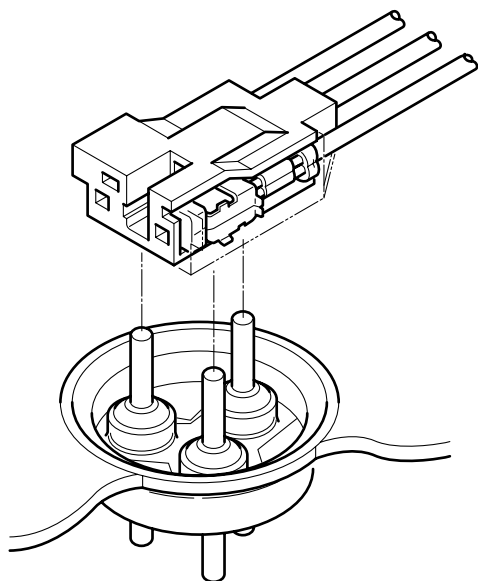

Contact

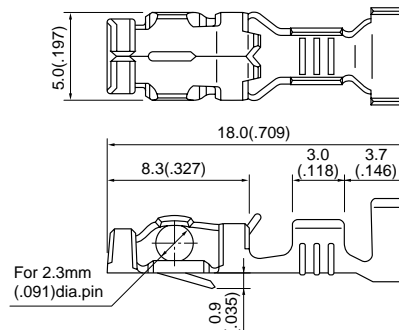


Model No.	Applicable wire			Q'ty / reel
	mm ²	AWG #	Insulation O.D. mm(in.)	
SCS-41T-2.3	0.5 to 1.25	20 to 16	1.9 to 3.4(.075 to .134)	5,000

Material and Finish

Phosphor bronze, tin-plated

Housing

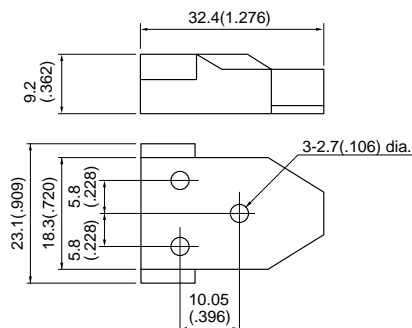

Model No.	Material	Q'ty / bag
3P-SCS	Phenol, UL94V-1, black	500
3P-SCS PBT	PBT, UL94HB, white	

Note: Contact JST for special requirements.

Applicator for the semi-automatic press AP-K2N

Contact	Crimp applicator MK-L	
	with safety cover	without safety cover
SCS-41T-2.3	APLMK SCS41-23	APLNC SCS41-23

Standards

Recognized E60389

Certified LR20812