


LOC	DIST	REVISIONS						
AF	50	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
					D	REV PER 0L10-0306-97	10/NOV/97	PF/JP

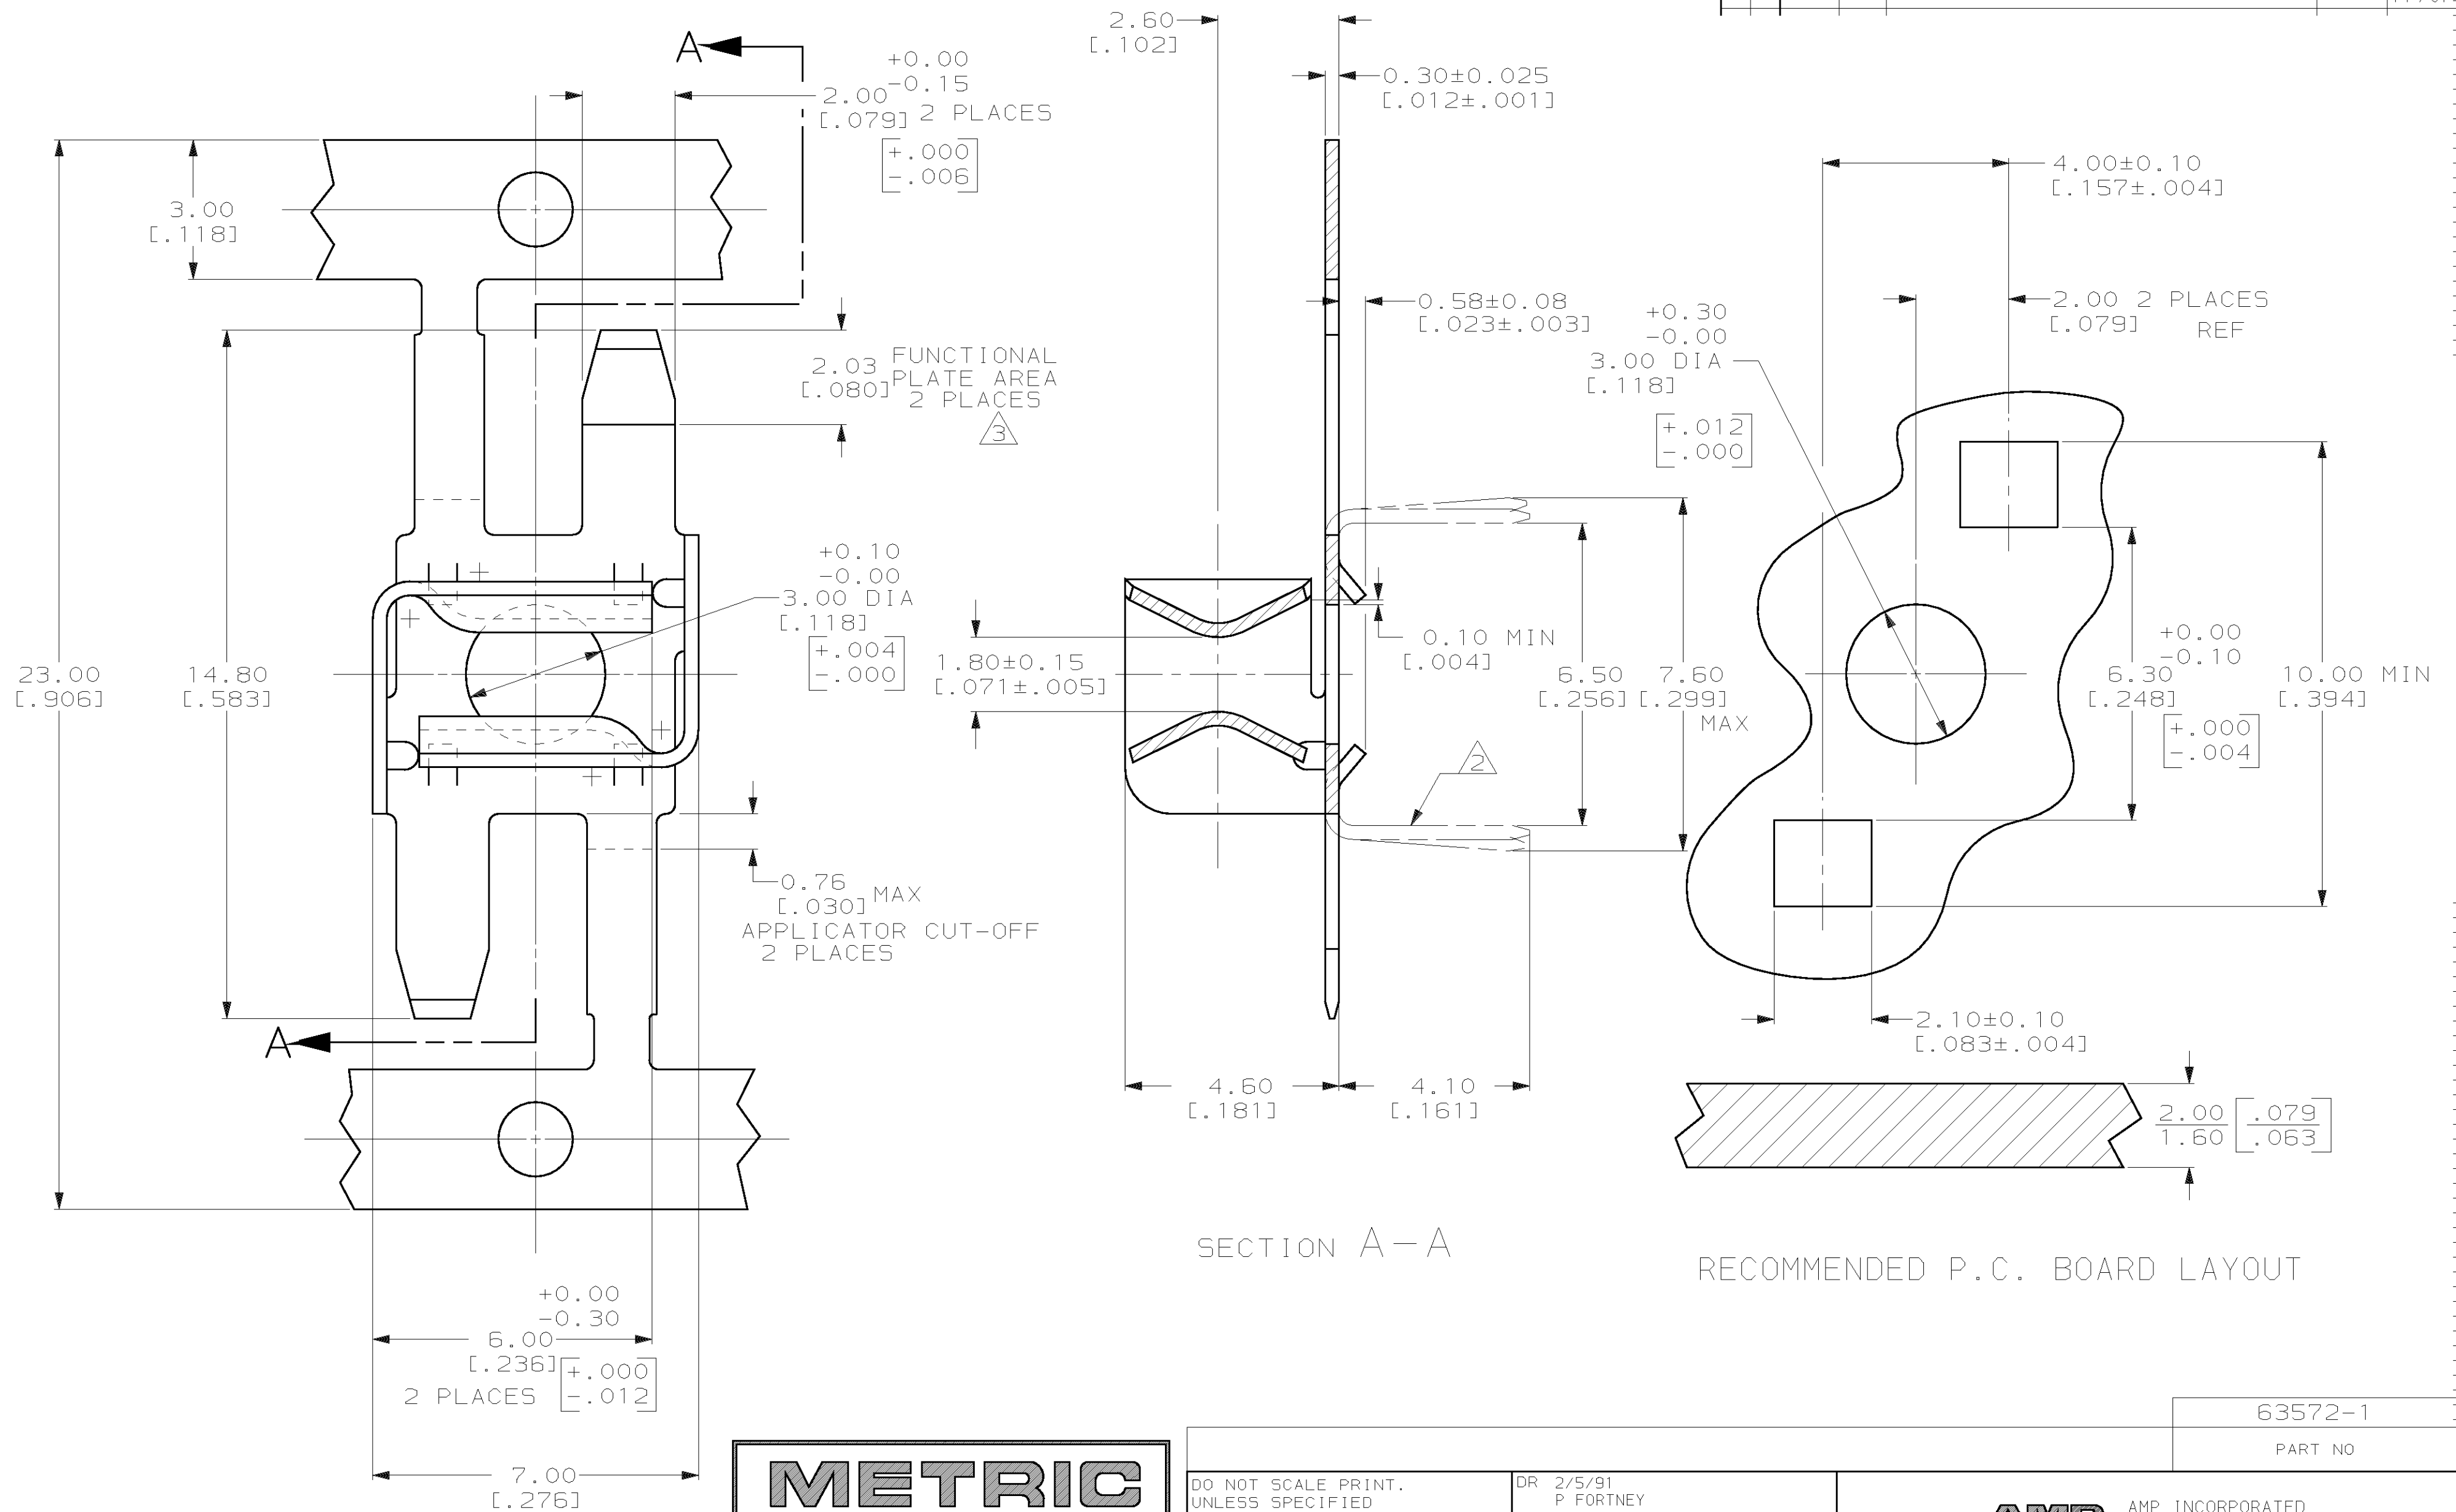

1 CONTINUOUS STRIP ON REELS.

△₂ TINES BENT 90° IN APPLICATOR PRIOR TO ASSEMBLY INTO P.C. BOARD.

3 0.00508 [0.000200] MIN TIN IN FUNCTIONAL PLATE AREA,
0.00254 [0.000100] MIN TIN ON REMAINDER.

4 PRODUCT COMPLIES WITH AMP SOLDERABILITY SPEC 109-11-5.
WHEN PLATED AND 109-11-1 AFTER TWO YEARS OF SHELF LIFE

METRIC

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON :
2 PLC DEC $\pm$ 0.25 [0.010]
3 PLC DEC $\pm$ -
ANGLES $\pm$ 1°
MATERIAL

#4 HARD
PHOSPHOR BRONZE

FINISH

DR 2/5/91 P FORTNEY

CHK	2/5/91
	M.S. FEHER

APPD	2/5/91
	D SCHWENK

APPD	2/5/91
	R WEAVILL

PRODUCT SPEC

	APPLICATION SPEC
--	------------------

WEIGHT _____

AMP AMP INCORPORATED
Harrisburg, Pa. 17105

NAME	PIN RECEPTACLE, PRINTED CIRCUIT BOARD, 2.50[.098] DIA
------	---

SIZE	CAGE CODE	DRAWING NO
------	-----------	------------

C	00779
---	-------

SCALE 10:1

DRAWING NO	63572
------------	-------

	05572
	SHEET 1 OF 1