


# legris

## connectic



**Product Guide**

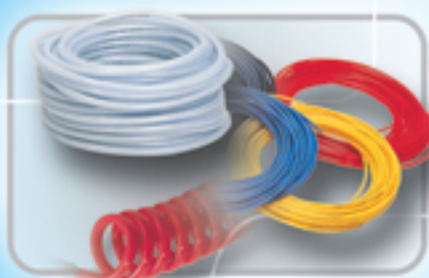

**Connection solutions  
for industrial fluids**

## **Product Guide**

This product guide is a representative overview of the Legris low pressure offer. Find out more in Legris **general catalogue** and on the web site **[www.legris.com](http://www.legris.com)**

**Legris**, a member of Group Legris Industries, designs, manufactures and markets innovative solutions for connecting, conveying and controlling industrial fluids. Inventor and leader in low pressure instant connection, Legris has based its development and success on essential strategic **customer-focused values**.

### To meet current and future industrial requirements

Legris Connectic works closely with companies that are present in **all industrial fields** and offers a **wide range of products and services** in order to meet the requirements of various sectors: assembly and packaging machines, automation, food liquid circuits, automotive process, etc.

Legris adopts an ongoing strategy of research and product innovation, in order to offer a continuous range of **new solutions** and wider applications to its customers.

Legris is certified **ISO 9001 : 2000**.



### To be close to you in order to serve you better

With 25 sales subsidiaries, 10 industrial and logistic locations and a network of distributors and agents, Legris Connectic is **present in 76 countries**. This worldwide presence enables Legris to better identify the changes and specific requirements of each market, in order to offer the best solutions, whilst meeting **local standards**.

A genuine sales and technical relay team ensures that there is a **close relationship** with each local market, providing it with support, advice and product logistics.



### European directives ROHS, ELV and WEE

Legris has always encouraged the use of non dangerous substances (heavy metals, bromine derivatives) in the design of its products in order to protect the **environment** and to safeguard **public health**. Thus, every effort has been made to ensure that **concerned ranges** would respect European directives **ROHS** (Reduction of Hazardous Substances - 2002/95/CE), **ELV** (End of Vehicle Life - 2000/53/CE) and **WEEE** (Waste Electrical and Electronic Equipment- 2002/96/CE), by 1st July 2006.

### Additional information accessible to everyone via the Legris website

**www.legris.com** includes the complete range of European, Asian and American products and gives **access** to thousands of product part numbers. Three search facilities direct the user to a complete and **real-time, updated** product file with technical drawings and pictures.

Each catalogue offers the possibility to place and receive **quotation requests**, which will be sent to distributors within the same corresponding geographical area.

Sections containing technical advice and animated graphics offer the user an **optimized understanding** of product technologies and their applications.




### Saving on design time with downloadable CAD drawings

Legris Connectic offers the possibility to download CAD drawings for a large number of products. This service is available to all, via **legris.com**, through a **free, easy and quick** download and the formats provided (2D and 3D) are compatible with the main CAD systems used worldwide.

This enables time saving in equipment design: each downloaded component can be directly integrated into an assembly, with the associated nomenclature. In addition, this service **guarantees** choice. Indeed, with Legris CAD drawings you can ensure that the selected components are suitable for use with other components within the assembly.



# build your installation with the Legris range

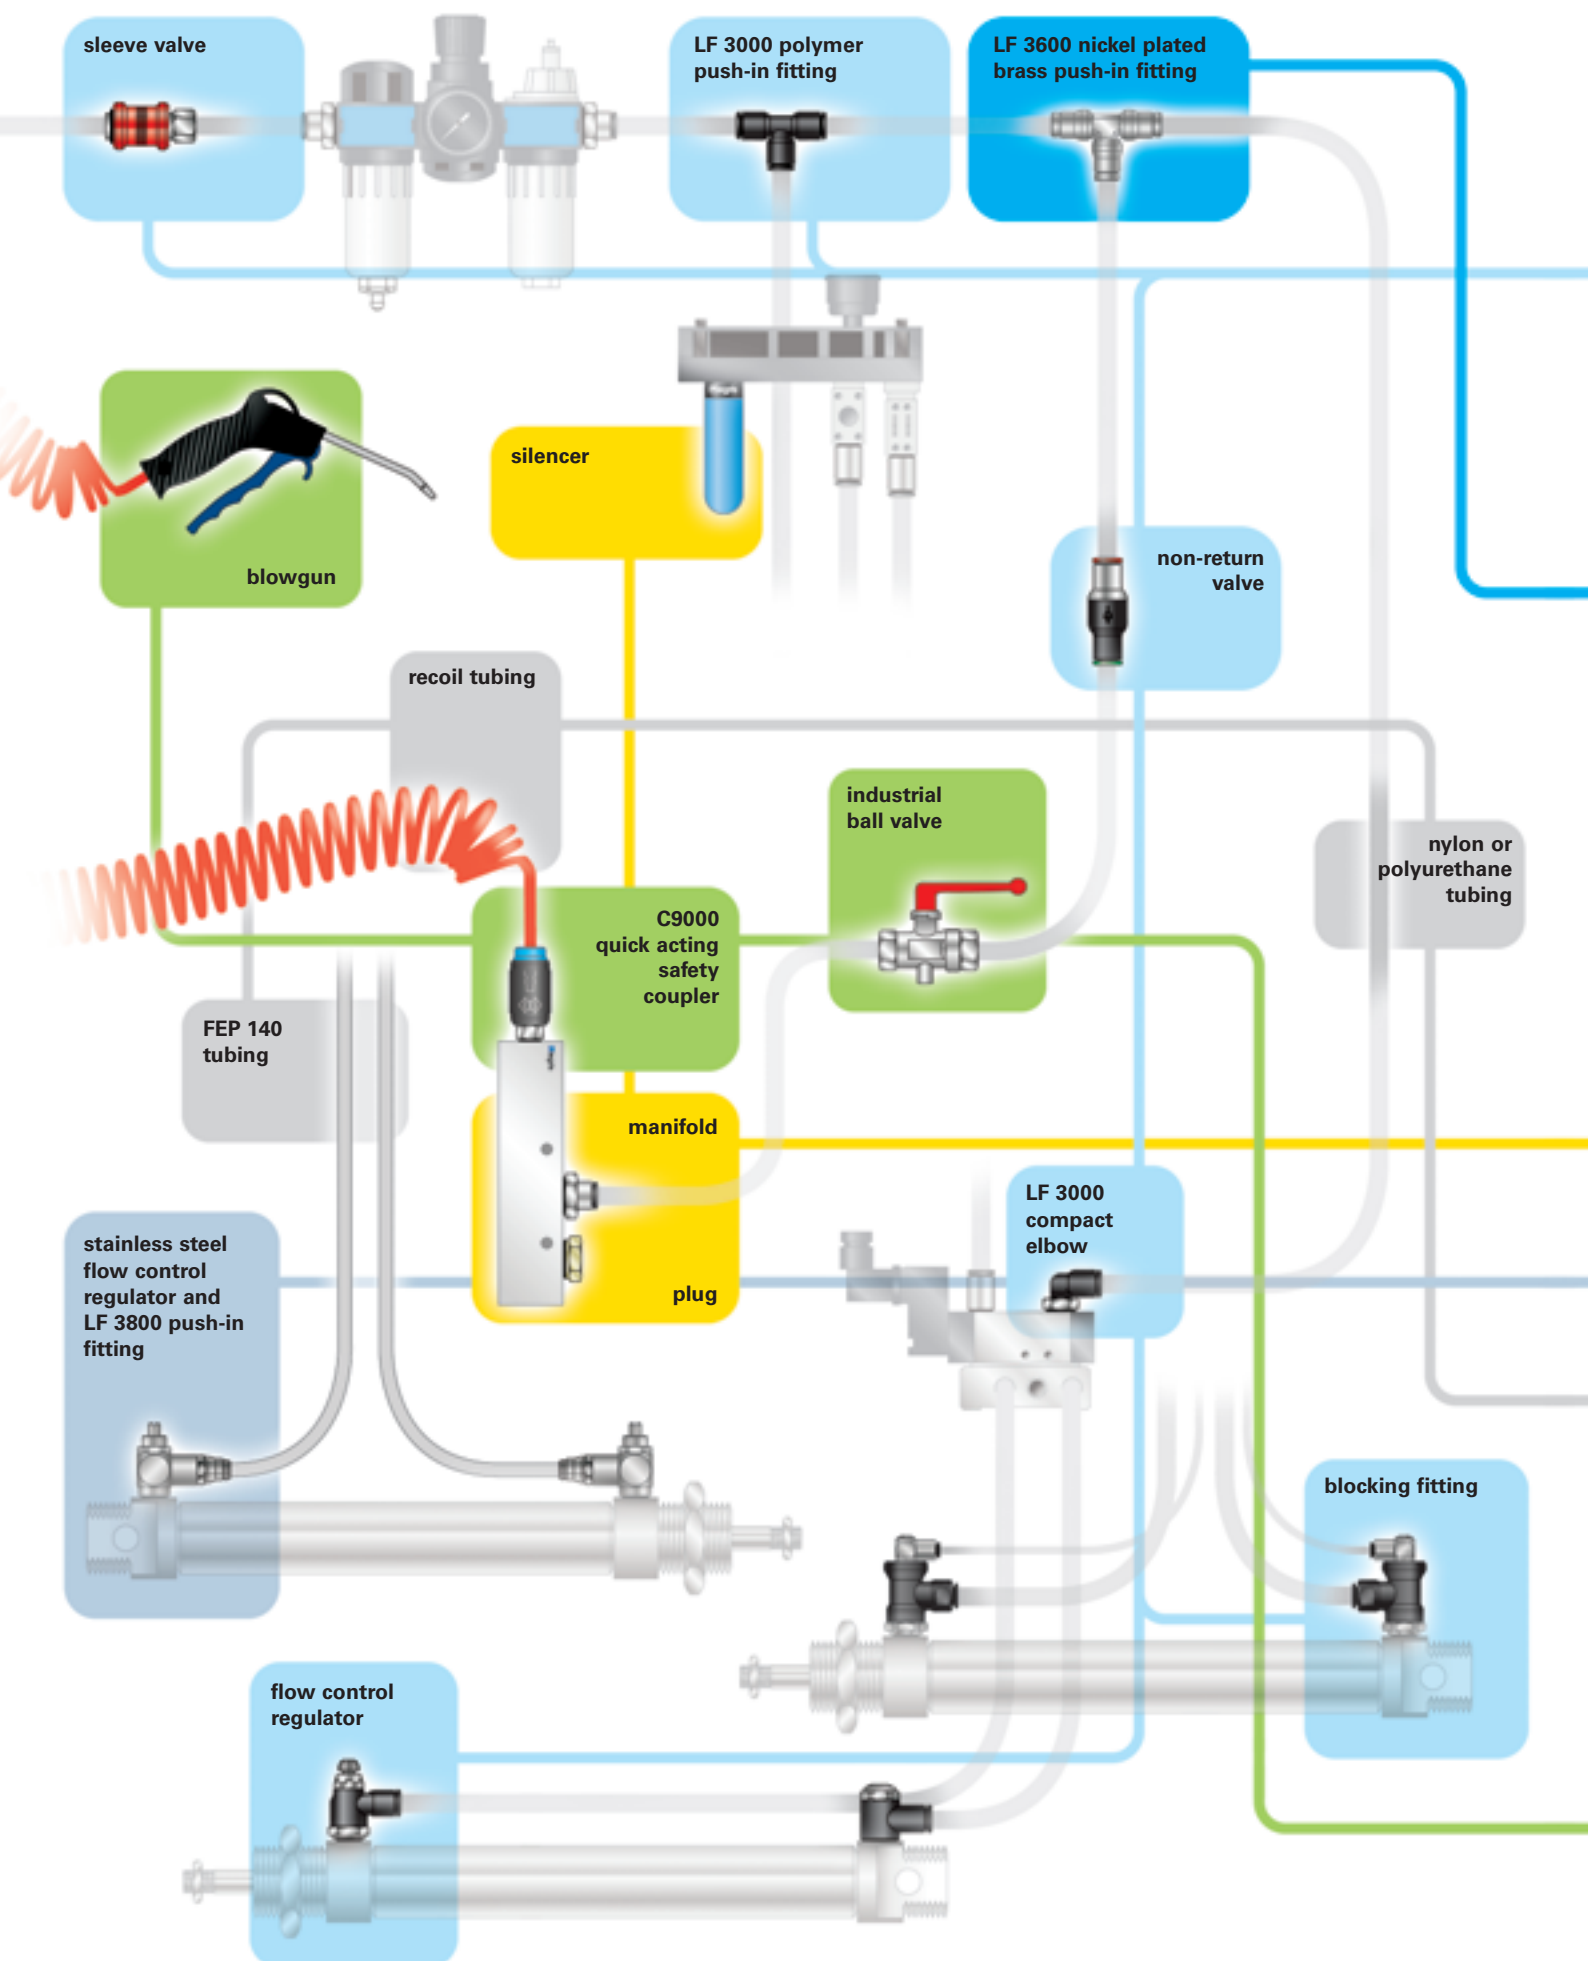

# contents of this product guide

## Pneumatic applications

LF 3000 polymer push-in fittings, flow control regulators and pneumatic function fittings  
pages 6 to 15



## For all fluid applications

LF 3600 chemical nickel-plated brass push-in fittings  
pages 16 to 17



## For aggressive fluids and environments

Stainless steel fittings : LF 3800 push-in fittings, flow control regulators and accessories  
pages 20 to 22



## Accessories and plugs

pages 18 to 19



## Technical tubes

pages 23 to 25





## Complementary range

Complementary range : quick acting couplers, blowguns and ball valves  
pages 26 to 28



# LF 3000

## polymer push-in fittings

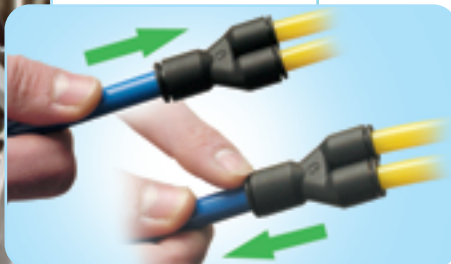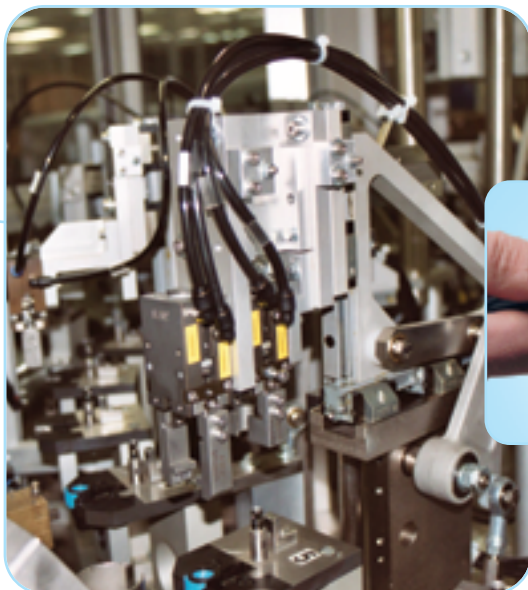

### Applications

- used to connect **pneumatic** devices in **many industrial applications** : assembly machines, packaging equipment, factory automation, automotive process industry, textile machinery, printing machinery, vacuum networks ...etc  
The LF 3000 range meets the latest international **standard ISO 14743**, for push-in connectors used in conjunction with thermoplastic tubes.

### Benefits

- **time saving** and **simplicity** of installation : instant connection and disconnection without the use of tools


- **full flow** as gripping and sealing are achieved using the outside of the tube.
- **immediate sealing** : reinforced sealing by a captive 'O' ring seal for parallel threaded fittings and pre-coating for taper threaded fittings.
- **compactness and aesthetic**: optimised dimensions and internal hexagons on straight fittings.
- **orientable** body for positioning purposes



#### ■ a solution for all applications

- wide variety of body designs and numerous configurations from 3 to 14 mm diameters.
- 3 types of thread : BSP parallel and metric parallel, BSP taper.

**Special versions available** on request – Please consult us.

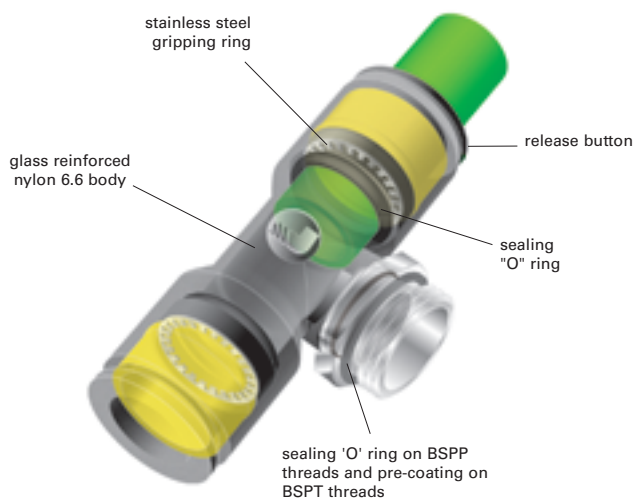

### Technical specifications

#### suitable fluids :

compressed air

*LF 3000® can also be used for conveying various types of liquids (water, cutting oil, etc) for industrial applications. The working pressure, from 0 to 6/10 bar, and temperatures, from 0 to 60°C, are dependent upon the fluid conveyed and the type of 'O' ring used. For further information, please consult us.*

**working pressure :**  
20 bar maximum

**vacuum capability :**  
vacuum of 755 mm Hg (99% vacuum)

**working temperature :**  
- 20° to + 80°C

All items in the LF 3000 range are guaranteed **silicone free**.

**maximum tightening torque for LF 3000® fittings, BSPP and metric threads**

| Thread | M3<br>x 0,5 | M5<br>x0,8 | M7<br>x1 | G1/8" | G1/4" | G3/8" | G1/2" |
|--------|-------------|------------|----------|-------|-------|-------|-------|
| da N.m | 0,06        | 0,16       | 0,8      | 0,8   | 1,2   | 3     | 3,5   |

# threaded fittings

## Designed to satisfy your requirements

### 3109



- **compactness** for better space utilisation
- the body is **orientable** for positioning purposes
- allowing overlap assembly with extended elbow (model 3129)
- available from **4 mm** to **14 mm** diameters

male stud fitting, hexagonal, BSPT thread

### 3175



| ØD | C    |                            |
|----|------|----------------------------|
| 4  | R1/8 | <a href="#">3175 04 10</a> |
| 4  | R1/4 | <a href="#">3175 04 13</a> |
| 6  | R1/8 | <a href="#">3175 06 10</a> |
| 6  | R1/4 | <a href="#">3175 06 13</a> |
| 6  | R3/8 | <a href="#">3175 06 17</a> |
| 6  | R1/2 | <a href="#">3175 06 21</a> |
| 8  | R1/8 | <a href="#">3175 08 10</a> |
| 8  | R1/4 | <a href="#">3175 08 13</a> |
| 8  | R3/8 | <a href="#">3175 08 17</a> |
| 10 | R1/4 | <a href="#">3175 10 13</a> |
| 10 | R3/8 | <a href="#">3175 10 17</a> |
| 10 | R1/2 | <a href="#">3175 10 21</a> |
| 12 | R3/8 | <a href="#">3175 12 17</a> |
| 12 | R1/2 | <a href="#">3175 12 21</a> |
| 14 | R3/8 | <a href="#">3175 14 17</a> |
| 14 | R1/2 | <a href="#">3175 14 21</a> |

male stud fitting, hexagonal, BSPP and metric thread

### 3101



| ØD | C      |                            |
|----|--------|----------------------------|
| 4  | M5x0,8 | <a href="#">3101 04 19</a> |
| 4  | G1/8   | <a href="#">3101 04 10</a> |
| 4  | G1/4   | <a href="#">3101 04 13</a> |
| 6  | M5x0,8 | <a href="#">3101 06 19</a> |
| 6  | G1/8   | <a href="#">3101 06 10</a> |
| 6  | G1/4   | <a href="#">3101 06 13</a> |
| 6  | G3/8   | <a href="#">3101 06 17</a> |
| 8  | G1/8   | <a href="#">3101 08 10</a> |
| 8  | G1/4   | <a href="#">3101 08 13</a> |
| 8  | G3/8   | <a href="#">3101 08 17</a> |
| 10 | G1/4   | <a href="#">3101 10 13</a> |
| 10 | G3/8   | <a href="#">3101 10 17</a> |
| 10 | G1/2   | <a href="#">3101 10 21</a> |
| 12 | G3/8   | <a href="#">3101 12 17</a> |
| 12 | G1/2   | <a href="#">3101 12 21</a> |
| 14 | G3/8   | <a href="#">3101 14 17</a> |
| 14 | G1/2   | <a href="#">3101 14 21</a> |

male stud elbow, BSPT thread

### 3109



| ØD | C    |                            |
|----|------|----------------------------|
| 4  | R1/8 | <a href="#">3109 04 10</a> |
| 4  | R1/4 | <a href="#">3109 04 13</a> |
| 4  | R3/8 | <a href="#">3109 04 17</a> |
| 6  | R1/8 | <a href="#">3109 06 10</a> |
| 6  | R1/4 | <a href="#">3109 06 13</a> |
| 6  | R3/8 | <a href="#">3109 06 17</a> |
| 8  | R1/8 | <a href="#">3109 08 10</a> |
| 8  | R1/4 | <a href="#">3109 08 13</a> |
| 8  | R3/8 | <a href="#">3109 08 17</a> |
| 10 | R1/4 | <a href="#">3109 10 13</a> |
| 10 | R3/8 | <a href="#">3109 10 17</a> |
| 10 | R1/2 | <a href="#">3109 10 21</a> |
| 12 | R3/8 | <a href="#">3109 12 17</a> |
| 12 | R1/2 | <a href="#">3109 12 21</a> |
| 14 | R3/8 | <a href="#">3109 14 17</a> |
| 14 | R1/2 | <a href="#">3109 14 21</a> |

extended male stud elbow, BSPT thread

### 3129



| ØD | C    |                            |
|----|------|----------------------------|
| 4  | R1/8 | <a href="#">3129 04 10</a> |
| 4  | R1/4 | <a href="#">3129 04 13</a> |
| 6  | R1/8 | <a href="#">3129 06 10</a> |
| 6  | R1/4 | <a href="#">3129 06 13</a> |
| 8  | R1/8 | <a href="#">3129 08 10</a> |
| 8  | R1/4 | <a href="#">3129 08 13</a> |
| 8  | R3/8 | <a href="#">3129 08 17</a> |
| 10 | R1/4 | <a href="#">3129 10 13</a> |
| 10 | R3/8 | <a href="#">3129 10 17</a> |
| 10 | R1/2 | <a href="#">3129 10 21</a> |

male stud elbow, BSPP and metric thread

### 3199



| ØD | C      |                            |
|----|--------|----------------------------|
| 4  | M5x0,8 | <a href="#">3199 04 19</a> |
| 4  | G1/8   | <a href="#">3199 04 10</a> |
| 4  | G1/4   | <a href="#">3199 04 13</a> |
| 6  | M5x0,8 | <a href="#">3199 06 19</a> |
| 6  | G1/8   | <a href="#">3199 06 10</a> |
| 6  | G1/4   | <a href="#">3199 06 13</a> |
| 6  | G3/8   | <a href="#">3199 06 17</a> |
| 8  | G1/8   | <a href="#">3199 08 10</a> |
| 8  | G1/4   | <a href="#">3199 08 13</a> |
| 8  | G3/8   | <a href="#">3199 08 17</a> |
| 10 | G1/4   | <a href="#">3199 10 13</a> |
| 10 | G3/8   | <a href="#">3199 10 17</a> |
| 10 | G1/2   | <a href="#">3199 10 21</a> |
| 12 | G3/8   | <a href="#">3199 12 17</a> |
| 12 | G1/2   | <a href="#">3199 12 21</a> |
| 14 | G3/8   | <a href="#">3199 14 17</a> |
| 14 | G1/2   | <a href="#">3199 14 21</a> |

extended male stud elbow, BSPP and metric thread

### 3169



| ØD | C      |                            |
|----|--------|----------------------------|
| 4  | M5x0,8 | <a href="#">3169 04 19</a> |
| 4  | G1/8   | <a href="#">3169 04 10</a> |
| 6  | M5x0,8 | <a href="#">3169 06 19</a> |
| 6  | G1/8   | <a href="#">3169 06 10</a> |
| 6  | G1/4   | <a href="#">3169 06 13</a> |
| 8  | G1/8   | <a href="#">3169 08 10</a> |
| 8  | G1/4   | <a href="#">3169 08 13</a> |

45° male elbow, BSPT thread

### 3113



| ØD | C    |                            |
|----|------|----------------------------|
| 4  | R1/8 | <a href="#">3113 04 10</a> |
| 6  | R1/8 | <a href="#">3113 06 10</a> |
| 6  | R1/4 | <a href="#">3113 06 13</a> |
| 8  | R1/8 | <a href="#">3113 08 10</a> |
| 8  | R1/4 | <a href="#">3113 08 13</a> |
| 8  | R3/8 | <a href="#">3113 08 17</a> |

45° male elbow, BSPP and M5 thread

### 3133



| ØD | C      |                            |
|----|--------|----------------------------|
| 4  | M5x0,8 | <a href="#">3133 04 19</a> |
| 4  | G1/8   | <a href="#">3133 04 10</a> |
| 6  | M5x0,8 | <a href="#">3133 06 19</a> |
| 6  | G1/8   | <a href="#">3133 06 10</a> |
| 6  | G1/4   | <a href="#">3133 06 13</a> |
| 8  | G1/8   | <a href="#">3133 08 10</a> |
| 8  | G1/4   | <a href="#">3133 08 13</a> |
| 8  | G3/8   | <a href="#">3133 08 17</a> |

female stud fitting, BSPP and M5 thread

### 3114



| ØD | C      |                            |
|----|--------|----------------------------|
| 4  | M5x0,8 | <a href="#">3114 04 19</a> |
| 4  | G1/8   | <a href="#">3114 04 10</a> |
| 4  | G1/4   | <a href="#">3114 04 13</a> |
| 6  | G1/8   | <a href="#">3114 06 10</a> |
| 6  | G1/4   | <a href="#">3114 06 13</a> |
| 8  | G1/8   | <a href="#">3114 08 10</a> |
| 8  | G1/4   | <a href="#">3114 08 13</a> |

female stud elbow, BSPP thread


### 3192



| ØD | C    |                            |
|----|------|----------------------------|
| 4  | G1/8 | <a href="#">3192 04 10</a> |
| 4  | G1/4 | <a href="#">3192 04 13</a> |
| 6  | G1/8 | <a href="#">3192 06 10</a> |
| 6  | G1/4 | <a href="#">3192 06 13</a> |
| 8  | G1/8 | <a href="#">3192 08 10</a> |
| 8  | G1/4 | <a href="#">3192 08 13</a> |

## Multiple configurations

Legris offers a solution for all tubing configurations.

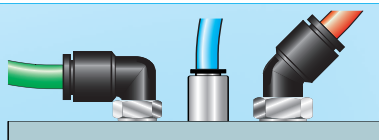

# threaded fittings

male stud branch tee,  
BSPP and M5 thread

| 3198                                                                             | ØD | C      |            |
|----------------------------------------------------------------------------------|----|--------|------------|
|  | 4  | M5x0,8 | 3198 04 19 |
|                                                                                  | 4  | G1/8   | 3198 04 10 |
|                                                                                  | 6  | M5x0,8 | 3198 06 19 |
|                                                                                  | 6  | G1/8   | 3198 06 10 |
|                                                                                  | 6  | G1/4   | 3198 06 13 |
|                                                                                  | 8  | G1/8   | 3198 08 10 |
|                                                                                  | 8  | G1/4   | 3198 08 13 |

male stud run tee,  
BSPP and M5 thread

| 3193                                                                              | ØD | C      |            |
|-----------------------------------------------------------------------------------|----|--------|------------|
|  | 4  | M5x0,8 | 3193 04 19 |
|                                                                                   | 4  | G1/8   | 3193 04 10 |
|                                                                                   | 6  | G1/8   | 3193 06 10 |
|                                                                                   | 6  | G1/4   | 3193 06 13 |
|                                                                                   | 8  | G1/8   | 3193 08 10 |
|                                                                                   | 8  | G1/4   | 3193 08 13 |

'Y' piece male,  
BSPP and M5 thread

| 3158                                                                              | ØD | C      |            |
|-----------------------------------------------------------------------------------|----|--------|------------|
|  | 4  | M5x0,8 | 3158 04 19 |
|                                                                                   | 4  | G1/8   | 3158 04 10 |
|                                                                                   | 4  | G1/4   | 3158 04 13 |
|                                                                                   | 6  | G1/8   | 3158 06 10 |
|                                                                                   | 6  | G1/4   | 3158 06 13 |
|                                                                                   | 8  | G1/8   | 3158 08 10 |
|                                                                                   | 8  | G1/4   | 3158 08 13 |

double banjo,  
BSPP and M5 thread

| 3119                                                                                | ØD | C      |            |
|-------------------------------------------------------------------------------------|----|--------|------------|
|  | 4  | M5x0,8 | 3119 04 19 |
|                                                                                     | 4  | G1/8   | 3119 04 10 |
|                                                                                     | 6  | G1/8   | 3119 06 10 |
|                                                                                     | 6  | G1/4   | 3119 06 13 |
|                                                                                     | 8  | G1/4   | 3119 08 13 |
|                                                                                     | 8  | G3/8   | 3119 08 17 |

twin banjo,  
BSPP and metric thread

| 3149                                                                             | ØD | C      |            |
|----------------------------------------------------------------------------------|----|--------|------------|
|  | 4  | M5x0,8 | 3149 04 19 |
|                                                                                  | 4  | G1/8   | 3149 04 10 |
|                                                                                  | 4  | G1/4   | 3149 04 13 |
|                                                                                  | 6  | G1/8   | 3149 06 10 |
|                                                                                  | 6  | G1/4   | 3149 06 13 |
|                                                                                  | 6  | G3/8   | 3149 06 17 |
|                                                                                  | 8  | G1/4   | 3149 08 13 |
|                                                                                  | 8  | G3/8   | 3149 08 17 |


single banjo,  
BSPP and M5 thread

| 3118                                                                              | ØD | C      |            |
|-----------------------------------------------------------------------------------|----|--------|------------|
|  | 4  | M5x0,8 | 3118 04 19 |
|                                                                                   | 4  | G1/8   | 3118 04 10 |
|                                                                                   | 6  | M5x0,8 | 3118 06 19 |
|                                                                                   | 6  | G1/8   | 3118 06 10 |
|                                                                                   | 6  | G1/4   | 3118 06 13 |
|                                                                                   | 8  | G1/8   | 3118 08 10 |
|                                                                                   | 8  | G1/4   | 3118 08 13 |
|                                                                                   | 8  | G3/8   | 3118 08 17 |

single banjo with female BSPP  
bolt, M5 and BSPP thread

| 3124                                                                              | ØD | C      |            |
|-----------------------------------------------------------------------------------|----|--------|------------|
|  | 4  | M5x0,8 | 3124 04 19 |
|                                                                                   | 4  | G1/8   | 3124 04 10 |
|                                                                                   | 6  | G1/4   | 3124 06 13 |
|                                                                                   | 8  | G3/8   | 3124 08 17 |

Legris banjos allow easy access,  
even when connections are  
close together.



# tube-to-tube fittings

tube/tube connector

| 3106                                                                               | ØD |            |
|------------------------------------------------------------------------------------|----|------------|
|  | 4  | 3106 04 00 |
|                                                                                    | 6  | 3106 06 00 |
|                                                                                    | 8  | 3106 08 00 |
|                                                                                    | 10 | 3106 10 00 |
|                                                                                    | 12 | 3106 12 00 |
|                                                                                    | 14 | 3106 14 00 |

equal elbow

| 3102                                                                                | ØD |            |
|-------------------------------------------------------------------------------------|----|------------|
|  | 4  | 3102 04 00 |
|                                                                                     | 6  | 3102 06 00 |
|                                                                                     | 8  | 3102 08 00 |
|                                                                                     | 10 | 3102 10 00 |
|                                                                                     | 12 | 3102 12 00 |
|                                                                                     | 14 | 3102 14 00 |

equal and unequal tee

| 3104                                                                                | ØD1 | ØD2 |            |
|-------------------------------------------------------------------------------------|-----|-----|------------|
|  | 4   | 4   | 3104 04 00 |
|                                                                                     | 6   | 6   | 3104 06 00 |
|                                                                                     | 6   | 4   | 3104 06 04 |
|                                                                                     | 8   | 8   | 3104 08 00 |
|                                                                                     | 8   | 6   | 3104 08 06 |
|                                                                                     | 10  | 10  | 3104 10 00 |
|                                                                                     | 10  | 8   | 3104 10 08 |
|                                                                                     | 12  | 12  | 3104 12 00 |
|                                                                                     | 14  | 14  | 3104 14 00 |

single 'Y' piece –  
equal and unequal

| 3140                                                                                  | ØD1 | ØD2 |            |
|---------------------------------------------------------------------------------------|-----|-----|------------|
|  | 4   | 4   | 3140 04 00 |
|                                                                                       | 4   | 6   | 3140 04 06 |
|                                                                                       | 6   | 6   | 3140 06 00 |
|                                                                                       | 6   | 8   | 3140 06 08 |
|                                                                                       | 8   | 8   | 3140 08 00 |

multiple "Y" piece -  
equal and unequal

| 3144                                                                               | ØD1 | ØD2 |            |
|------------------------------------------------------------------------------------|-----|-----|------------|
|  | 4   | 4   | 3144 04 04 |
|                                                                                    | 4   | 6   | 3144 04 06 |
|                                                                                    | 6   | 6   | 3144 06 06 |
|                                                                                    | 6   | 8   | 3144 06 08 |

multiple tee  
with fixing holes

| 3304                                                                                | ØD1 | ØD2 |            |
|-------------------------------------------------------------------------------------|-----|-----|------------|
|  | 6   | 4   | 3304 06 04 |
|                                                                                     | 8   | 4   | 3304 08 04 |
|                                                                                     | 8   | 6   | 3304 08 06 |
|                                                                                     | 10  | 6   | 3304 10 06 |
|                                                                                     | 10  | 8   | 3304 10 08 |

unequal multiple elbow  
with fixing holes

| 3306                                                                                | ØD1 | ØD2 |            |
|-------------------------------------------------------------------------------------|-----|-----|------------|
|  | 6   | 4   | 3306 06 04 |
|                                                                                     | 8   | 4   | 3306 08 04 |
|                                                                                     | 8   | 6   | 3306 08 06 |
|                                                                                     | 10  | 6   | 3306 10 06 |
|                                                                                     | 10  | 8   | 3306 10 08 |

equal cross,  
with fixing holes

| 3107                                                                                  | ØD |            |
|---------------------------------------------------------------------------------------|----|------------|
|  | 4  | 3107 04 00 |
|                                                                                       | 6  | 3107 06 00 |
|                                                                                       | 8  | 3107 08 00 |

the "plus" of legris.com



Download **CAD drawings** of all **LF 3000®** models from the online catalogue of legris.com. Formats (2D and 3D) are compatible with principal worldwide CAD platforms.  
A **free service** accessible to everyone.

[www.legris.com](http://www.legris.com)



# tube-to-tube bulkhead fittings

bulkhead connector

**3116** 

| ØD | C    |            |
|----|------|------------|
| 4  | 16   | 3116 04 00 |
| 6  | 18   | 3116 06 00 |
| 8  | 21,5 | 3116 08 00 |
| 10 | 26   | 3116 10 00 |
| 12 | 31   | 3116 12 00 |
| 14 | 34,5 | 3116 14 00 |



female bulkhead connector, BSPP thread

**3136** 


| ØD | C    |            |
|----|------|------------|
| 4  | G1/8 | 3136 04 10 |
| 4  | G1/4 | 3136 04 13 |
| 6  | G1/8 | 3136 06 10 |
| 6  | G1/4 | 3136 06 13 |
| 8  | G1/8 | 3136 08 10 |
| 8  | G1/4 | 3136 08 13 |



equal bulkhead elbow

**3139** 

| ØD | C    |            |
|----|------|------------|
| 4  | 16   | 3139 04 00 |
| 6  | 18   | 3139 06 00 |
| 8  | 21,5 | 3139 08 00 |

All plastic nuts are fitted with an integral O-ring to optimise sealing to a bulkhead wall.

## plug-in fittings and accessories

male standpipe, BSPT thread

**3121** 

| ØD | C    |            |
|----|------|------------|
| 4  | R1/8 | 3121 04 10 |
| 4  | R1/4 | 3121 04 13 |
| 6  | R1/8 | 3121 06 10 |
| 6  | R1/4 | 3121 06 13 |
| 8  | R1/8 | 3121 08 10 |
| 8  | R1/4 | 3121 08 13 |
| 8  | R3/8 | 3121 08 17 |
| 10 | R1/4 | 3121 10 13 |
| 10 | R3/8 | 3121 10 17 |
| 10 | R1/2 | 3121 10 21 |
| 12 | R3/8 | 3121 12 17 |
| 12 | R1/2 | 3121 12 21 |
| 14 | R1/2 | 3121 14 21 |



male standpipe, BSPP and M5 thread

**3131** 

| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3131 04 19 |
| 4  | G1/8   | 3131 04 10 |
| 4  | G1/4   | 3131 04 13 |
| 6  | G1/8   | 3131 06 10 |
| 6  | G1/4   | 3131 06 13 |
| 8  | G1/8   | 3131 08 10 |
| 8  | G1/4   | 3131 08 13 |
| 8  | G3/8   | 3131 08 17 |



plug-in equal compact elbow with plastic tailpiece

**3182** 

| ØD | C |            |
|----|---|------------|
| 4  | 4 | 3182 04 00 |
| 6  | 6 | 3182 06 00 |
| 8  | 8 | 3182 08 00 |



plug-in equal compact tee with plastic tailpiece

**3188** 

| ØD | C |            |
|----|---|------------|
| 4  | 4 | 3188 04 00 |
| 6  | 6 | 3188 06 00 |
| 8  | 8 | 3188 08 00 |



reducer

**3166** 

| ØD | C  |            |
|----|----|------------|
| 4  | 6  | 3166 04 06 |
| 4  | 8  | 3166 04 08 |
| 6  | 8  | 3166 06 08 |
| 6  | 10 | 3166 06 10 |
| 8  | 10 | 3166 08 10 |
| 8  | 12 | 3166 08 12 |
| 8  | 14 | 3166 08 14 |
| 10 | 12 | 3166 10 12 |
| 10 | 14 | 3166 10 14 |
| 12 | 14 | 3166 12 14 |



increaser

**3168** 

| ØD | C |            |
|----|---|------------|
| 6  | 4 | 3168 06 04 |
| 8  | 6 | 3168 08 06 |
| 10 | 8 | 3168 10 08 |



double male stem connector

**3120** 

| ØD |            |
|----|------------|
| 6  | 3120 06 00 |
| 8  | 3120 08 00 |
| 10 | 3120 10 00 |



blanking plug

**3126** 

| ØD |            |
|----|------------|
| 4  | 3126 04 00 |
| 6  | 3126 06 00 |
| 8  | 3126 08 00 |



## multi connectors and manifolds

male screw body

**3320** 

| o.d. tube | number of outlets |               |
|-----------|-------------------|---------------|
| 4         | 4                 | 3320 04 00 04 |
| 4         | 7                 | 3320 04 00 07 |
| 4         | 12                | 3320 04 00 12 |
| 6         | 4                 | 3320 06 00 04 |
| 6         | 7                 | 3320 06 00 07 |



female screw body

**3321** 

| o.d. tube | number of outlets |               |
|-----------|-------------------|---------------|
| 4         | 4                 | 3321 04 00 04 |
| 4         | 7                 | 3321 04 00 07 |
| 4         | 12                | 3321 04 00 12 |
| 6         | 4                 | 3321 06 00 04 |
| 6         | 7                 | 3321 06 00 07 |



screw cap

**3329** 

| number of outlets |            |
|-------------------|------------|
| 4-7               | 3329 00 02 |
| 12                | 3329 00 03 |



manifold with LF 3000 push-in connection

**3310** 

| ØD | C    |            |
|----|------|------------|
| 4  | G1/4 | 3310 04 13 |
| 6  | G1/4 | 3310 06 13 |
| 8  | G3/8 | 3310 08 17 |



# Carstick® cartridges

Carstick®

## 3100

ØD cartridge




|    |            |
|----|------------|
| 4  | 3100 04 00 |
| 6  | 3100 06 00 |
| 8  | 3100 08 00 |
| 10 | 3100 10 00 |
| 10 | 3100 12 00 |

Ideal for **continuous processes**, Carstick cartridge provides a **high performance** solution for automatic, semi-automatic and manual assembly equipment for pneumatic components. Please consult us for detailed drawings of cavity dimensions and tolerances. Special versions available on request. Please consult us.

## Carstick® assembly

Assembly tool

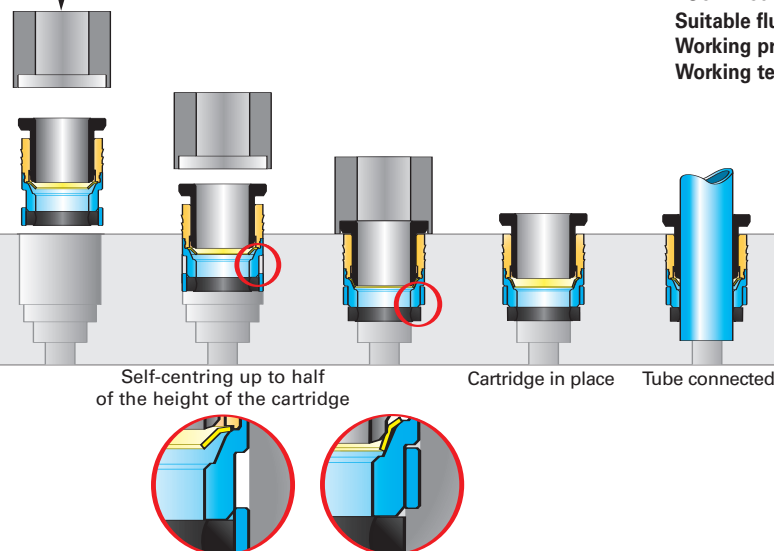

Self-centring up to half of the height of the cartridge

Cartridge in place

Tube connected

Depression of seal protection leaves seal locked into cavity

## Technical specifications

**Suitable fluid** : compressed air  
**Working pressure** : maximum 20 bar  
**Working temperature** : - 20° to + 80°C

## accessories

reducer male to female,  
BSPP and metric thread

increaser male to female,  
BSPP and metric thread

threaded plug,  
BSPP and metric thread

clip strips for tubes

## 0178

C1 C2



|      |        |            |
|------|--------|------------|
| M7x1 | M5x0,8 | 0178 55 19 |
| G1/8 | M5x0,8 | 0178 10 19 |
| G1/4 | G1/8   | 0178 13 10 |
| G3/8 | G1/8   | 0178 17 10 |
| G3/8 | G1/4   | 0178 17 13 |
| G1/2 | G1/4   | 0178 21 13 |
| G1/2 | G3/8   | 0178 21 17 |
| G3/4 | G1/2   | 0178 27 21 |

## 0179

C1 C2



|         |      |            |
|---------|------|------------|
| M12x1,5 | G1/4 | 0179 67 13 |
| G1/8    | G1/4 | 0179 10 13 |
| G1/4    | G3/8 | 0179 13 17 |
| G3/8    | G1/2 | 0179 17 21 |

## 0222

C



|       |            |
|-------|------------|
| M5x08 | 0222 19 00 |
| M7x1  | 0222 55 00 |
| G1/8  | 0222 10 00 |
| G1/4  | 0222 13 00 |
| G3/8  | 0222 17 00 |
| G1/2  | 0222 21 00 |

## clip

ØD



|    |            |
|----|------------|
| 4  | Clip 04 00 |
| 6  | Clip 06 00 |
| 8  | Clip 08 00 |
| 10 | Clip 10 00 |
| 12 | Clip 12 00 |
| 14 | Clip 14 00 |

The **LF 3000® system** is designed for use with **various types of tubing** found in this product guide :

■ **semi-rigid nylon tube** :  
3 mm OD to 14mm OD

■ **flexible polyurethane tube** :  
3 mm OD to 14mm OD

■ **fluoropolymer tube** :  
4 mm OD to 12mm OD



# Flow control regulators



## Applications

- In the field of industrial automation the fittings control the speed of a pneumatic cylinder. The exhaust air flow is controlled by an adjustable restrictor. The inlet flow is unrestricted full bore. Depending upon the model, Lefris flow control regulators may be fitted : to the cylinder (exhaust version), to the control valve (supply version) or in the compressed air line (in-line version).

## Benefits

- perfectly controlled sealing both externally (tube outlet and sub-base) and internally (adjustment screw)
- stability, progressiveness and accuracy of flow
- LF 3000 instant connection ensures quick assembly
- designed for easy adjustment

## Choosing a flow control regulator

### conditions of use

➤ standard conditions  
▼  
models in polymer

➤ severe conditions  
▼  
models in metal

### dimensions

➤ standard conditions with full flow performance  
▼  
compact models

➤ for very small cylinders with accurate adjustment  
▼  
miniature models

### type of adjustment

➤ manual adjustment  
▼  
models with external screw

➤ adjustment with screwdriver  
▼  
models with recessed screw

### configurations of the installation

➤ standard applications  
▼  
banjo types

➤ vertical or angled exit  
▼  
swivel outlet types


➤ difficult access of cylinder  
▼  
in-line types

To assist differentiation, each version is identified by the corresponding **pneumatic symbol** and a **letter** :

- one-way adjustment  
"exhaust" version :  
letter **A**



- "supply" version :  
letter **B**

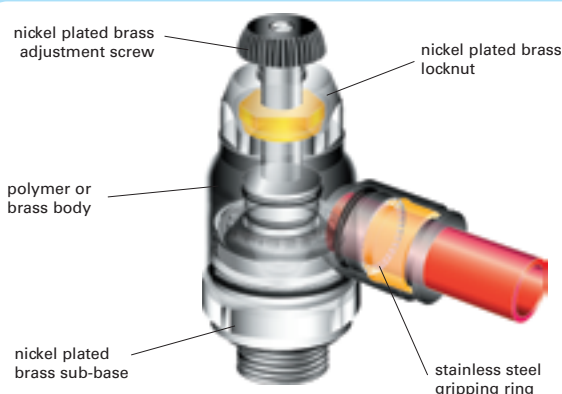

## Technical specifications

**suitable fluid :**  
compressed air

**working pressure :**  
1 to 10 bar

**working temperature :**  
0° to + 70°C

# flow control regulators

## polymer version

### Designed to satisfy your requirements

#### 7010



- the recessed adjustment screw reduces external dimensions thus allowing use in **reduced spaces** and **on small cylinders**
- the recessed screw provides **security** and helps to **prevent** unwanted adjustment.
- also available in metal version (7130)

with recessed adjustment screw, BSPP and M5 thread



#### 7010

| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 7010 04 19 |
| 4  | G1/8   | 7010 04 10 |
| 6  | M5x0,8 | 7010 06 19 |
| 6  | G1/8   | 7010 06 10 |
| 6  | G1/4   | 7010 06 13 |
| 8  | G1/8   | 7010 08 10 |
| 8  | G1/4   | 7010 08 13 |
| 8  | G3/8   | 7010 08 17 |
| 10 | G1/4   | 7010 10 13 |
| 10 | G3/8   | 7010 10 17 |
| 10 | G1/2   | 7010 10 21 |
| 12 | G3/8   | 7010 12 17 |
| 12 | G1/2   | 7010 12 21 |



"miniature", BSPP and metric thread



"miniature", BSPP and metric thread



"compact", BSPP thread



"compact", swivel outlet type, BSPP thread



#### 7660

| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 7660 04 19 |
| 4  | G1/8   | 7660 04 10 |
| 6  | M5x0,8 | 7660 06 19 |
| 6  | G1/8   | 7660 06 10 |
| 6  | G1/4   | 7660 06 13 |
| 8  | G1/8   | 7660 08 10 |
| 8  | G1/4   | 7660 08 13 |



#### 7669

| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 7669 04 19 |
| 4  | G1/8   | 7669 04 10 |
| 6  | M5x0,8 | 7669 06 19 |
| 6  | G1/8   | 7669 06 10 |
| 6  | G1/4   | 7669 06 13 |
| 8  | G1/8   | 7669 08 10 |
| 8  | G1/4   | 7669 08 13 |



#### 7060

| ØD | C    |            |
|----|------|------------|
| 4  | G1/8 | 7060 04 10 |
| 6  | G1/8 | 7060 06 10 |
| 6  | G1/4 | 7060 06 13 |
| 8  | G1/8 | 7060 08 10 |
| 8  | G1/4 | 7060 08 13 |
| 8  | G3/8 | 7060 08 17 |
| 10 | G1/4 | 7060 10 13 |
| 10 | G3/8 | 7060 10 17 |
| 12 | G3/8 | 7060 12 17 |
| 12 | G1/2 | 7060 12 21 |



#### 7040

| ØD | C    |            |
|----|------|------------|
| 6  | G1/8 | 7040 06 10 |
| 6  | G1/4 | 7040 06 13 |
| 8  | G1/8 | 7040 08 10 |
| 8  | G1/4 | 7040 08 13 |
| 8  | G3/8 | 7040 08 17 |
| 10 | G1/4 | 7040 10 13 |
| 10 | G3/8 | 7040 10 17 |
| 12 | G3/8 | 7040 12 17 |
| 12 | G1/2 | 7040 12 21 |



"in-line" with LF3000 push-in connection



"in-line" with push-in connections, panel mountable



#### 7770

| ØD |            |
|----|------------|
| 4  | 7770 04 00 |
| 6  | 7770 06 00 |
| 8  | 7770 08 00 |
| 10 | 7770 10 00 |
| 12 | 7770 12 00 |



#### 7776

| ØD |            |
|----|------------|
| 4  | 7776 04 00 |
| 6  | 7776 06 00 |
| 8  | 7776 08 00 |
| 10 | 7776 10 00 |
| 12 | 7776 12 00 |



## metal version

"compact" with push-in connection, BSPP thread



"compact" with threaded fitting, BSPP thread



with push-in connection, BSPP – recessed adjustment screw



with brass compression fitting and external adjustment screw, BSPP thread



#### 7100

| ØD | C    |            |
|----|------|------------|
| 4  | G1/8 | 7100 04 10 |
| 6  | G1/8 | 7100 06 10 |
| 6  | G1/4 | 7100 06 13 |
| 8  | G1/8 | 7100 08 10 |
| 8  | G1/4 | 7100 08 13 |
| 8  | G3/8 | 7100 08 17 |
| 10 | G1/4 | 7100 10 13 |
| 10 | G3/8 | 7100 10 17 |
| 12 | G3/8 | 7100 12 17 |
| 12 | G1/2 | 7100 12 21 |
| 14 | G1/2 | 7100 14 21 |



#### 7110

| C    |            |
|------|------------|
| G1/8 | 7110 10 10 |
| G1/4 | 7110 13 13 |
| G3/8 | 7110 17 17 |
| G1/2 | 7110 21 21 |



#### 7130

| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 7130 04 19 |
| 4  | G1/8   | 7130 04 10 |
| 6  | M5x0,8 | 7130 06 19 |
| 6  | G1/8   | 7130 06 10 |
| 6  | G1/4   | 7130 06 13 |
| 8  | G1/8   | 7130 08 10 |
| 8  | G1/4   | 7130 08 13 |
| 8  | G3/8   | 7130 08 17 |



#### 7762

| ØD | C    |             |
|----|------|-------------|
| 8  | G1/8 | 7762 08 10* |
| 10 | G1/4 | 7762 10 13  |
| 14 | G3/8 | 7762 14 17  |
| 18 | G1/2 | 7762 18 21  |



\* with adjustment knurl

# flow control regulators


## flow characteristics (at 6 bar)

6 bar  
 return  
 adjustment



F : flow in NI/min

N : number of turns


### 7010

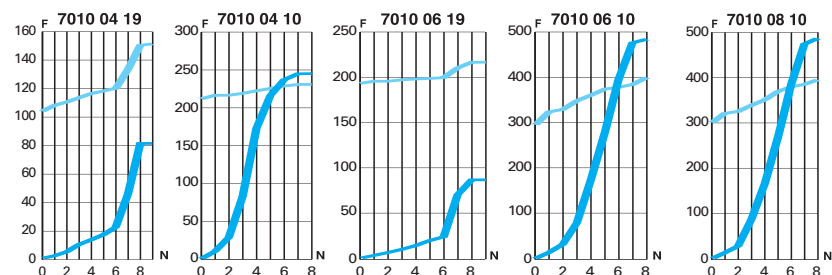



### 7660

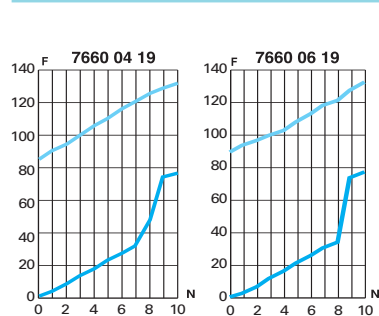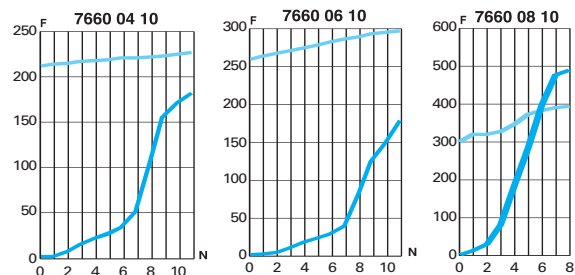

### 7669

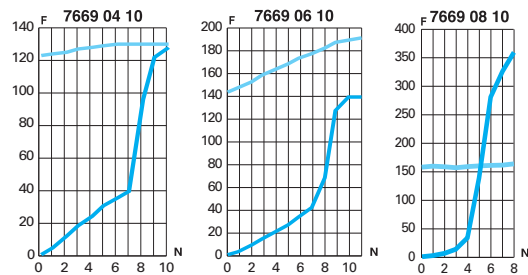


### 7060

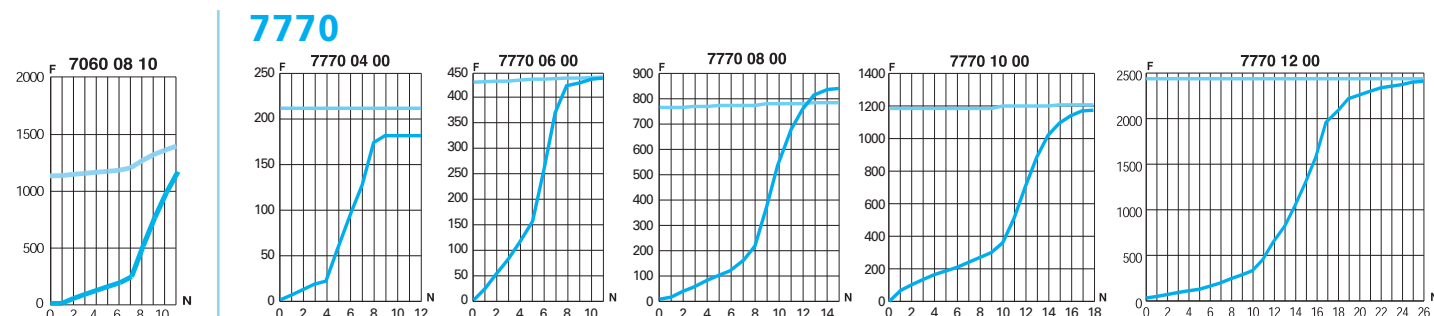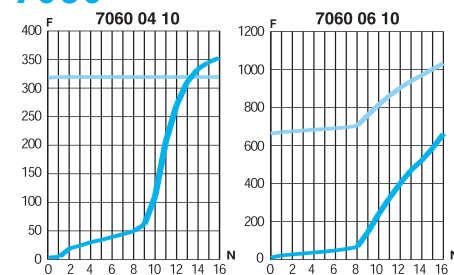


### 7770


### 7776

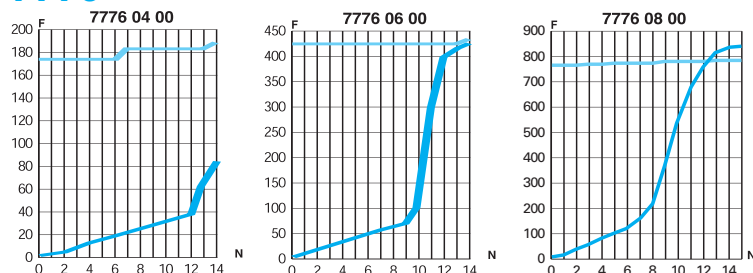


### 7100

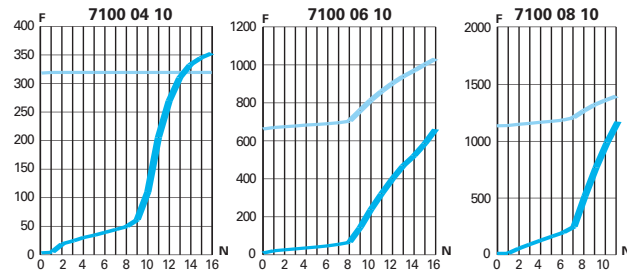

### 7110

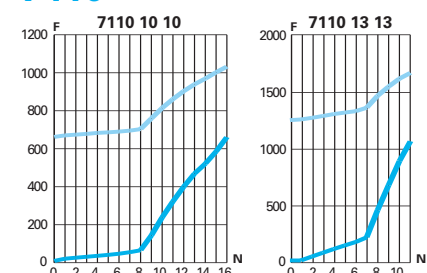

### 7130

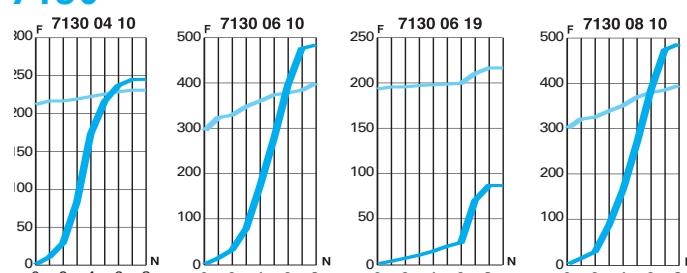

the "plus" of legris.com



Select and download **CAD drawings** of flow control regulators easily and quickly. An optimised and **free service**, available to everyone on the Legris web-site.

[www.legris.com](http://www.legris.com)



# Pneumatic function fittings

## Applications

Legris pneumatic function fittings are designed to provide **added value connection** solutions.

They have an **important part** to play within many installations

Here are few examples :

### To protect your installation

- During an emergency stop of a pneumatic installation, blocking fittings are designed to maintain loads.

**Model 7881**

- In case of failure of the power supply, non-return valves allow air to pass in one direction whilst blocking flow in the other.

**Models : in polymer 7996 - in stainless steel 4890**

### To adjust performance of your installation

- In order to adjust pressure to the required value, pressure regulator fittings stabilize at a given value the pressure applied to pneumatic equipment, whatever the fluctuations of pressure upstream.

**Model 7300**

- **Pressure reducer fittings** enable manual adjustment of the circuit pressure applied to pneumatic equipment, limiting the cylinder pressure.

**Models 7316**

### To control your installation

- For immediate and direct opening/closure of specific area of your installation supply, manually operated valves require just a simple manual operation.

**Models 7800 – 7801**

- For immediate venting of a pneumatic circuit, pneumatic sleeve valves need only a straightforward lateral movement of the sleeve.

**Model 0669**

- For closure/purge of a pneumatic circuit, mini-ball valves are very easy to use where access is difficult and space is at a premium.

**Models 7913 – 7910**

### Legris.com's plus points



You will find in the legris.com learning space, numerous **animated presentations** of these fittings : their technology and their functions.

[www.legris.com](http://www.legris.com)



# pneumatic function fittings

## blocking fittings

male thread BSPP, with threaded fitting



**7881**

| C1   | C2   |            |
|------|------|------------|
| G1/8 | G1/4 | 7881 13 10 |
| G1/4 | G1/4 | 7881 13 13 |
| G3/8 | G3/8 | 7881 17 17 |
| G1/2 | G1/2 | 7881 21 21 |

ØC2  
ØC1

working pressure : 1 to 10 bar  
working temperature : -20° to + 70°C  
materials :  
- body : treated brass

male thread BSPP, with LF 3000 push-in connection



**7880**

| ØD | C    |            |
|----|------|------------|
| 6  | G1/8 | 7880 06 10 |
| 6  | G1/4 | 7880 06 13 |
| 8  | G1/4 | 7880 08 13 |
| 8  | G3/8 | 7880 08 17 |
| 10 | G3/8 | 7880 10 17 |
| 12 | G1/2 | 7880 12 21 |

working pressure : 1 to 10 bar  
working temperature : -20° to + 70°C  
materials :  
- body : treated brass

## non-return valves

in-line non-return valve with LF 3000 push-in connection



**7996**

| ØD |            |
|----|------------|
| 4  | 7996 04 00 |
| 6  | 7996 06 00 |
| 8  | 7996 08 00 |
| 10 | 7996 10 00 |
| 12 | 7996 12 00 |

working pressure : 1 to 10 bar  
working temperature : 0° to + 70°C  
materials :  
- body : polymer and nickel plated brass

You will also find, on page 21, non-return valves in stainless steel.

## manual operated vent fittings

pneumatic sleeve valve, double female, BSPP thread

**0669**

| C        | ØD |            |
|----------|----|------------|
| M5x0,8 2 |    | 0669 02 19 |
| G1/8 4   |    | 0669 04 10 |
| G1/4 7   |    | 0669 07 13 |
| G3/8 10  |    | 0669 10 17 |
| G1/2 14  |    | 0669 14 21 |
| G3/4 19  |    | 0669 19 27 |

working pressure : 16 bar  
working temperature : -10° to + 80°C  
materials :  
- body : nickel plated brass  
- sleeve : anodised aluminium

3/2 manual switch operated valve, with push-in connection, BSPP thread



**7800**

| ØD | C      |            |
|----|--------|------------|
| 4  | G1/8   | 7800 04 10 |
| 4  | M5x0,8 | 7800 04 19 |
| 6  | G1/8   | 7800 06 10 |
| 6  | G1/4   | 7800 06 13 |
| 6  | M5x0,8 | 7800 06 19 |
| 8  | G1/8   | 7800 08 10 |
| 8  | G1/4   | 7800 08 13 |
| 10 | G1/4   | 7800 10 13 |

working pressure : 10 bar  
working temperature : -10° to + 80°C  
materials :  
- body : polymer and nickel plated brass

## mini ball valves

3/2, with vent, with push-in connection




**7913**

| ØD |            |
|----|------------|
| 4  | 7913 04 00 |
| 6  | 7913 06 00 |
| 8  | 7913 08 00 |
| 10 | 7913 10 00 |
| 12 | 7913 12 00 |

working pressure : 1 to 10 bar  
working temperature : -20° to + 80°C  
materials :  
- body : polymer

2/2, with push-in connection



**7910**

| ØD |            |
|----|------------|
| 4  | 7910 04 00 |
| 6  | 7910 06 00 |
| 8  | 7910 08 00 |
| 10 | 7910 10 00 |
| 12 | 7910 12 00 |

working pressure : 1 to 10 bar  
working temperature : -20° to + 80°C  
materials :  
- body : polymer

## pressure regulator fittings

male BSPP, with push-in fitting connection and engineering plastic body



**7300**

| ØD | C    |            |
|----|------|------------|
| 4  | G1/8 | 7300 04 10 |
| 6  | G1/8 | 7300 06 10 |
| 6  | G1/4 | 7300 06 13 |
| 8  | G1/8 | 7300 08 10 |
| 8  | G1/4 | 7300 08 13 |
| 8  | G3/8 | 7300 08 17 |

working pressure :  
- input pressure : 1 to 16 bar  
- regulated pressure : 1 to 8 bar  
working temperature : -10° to + 70°C  
materials :  
- body : polymer and nickel plated brass

## pressure reducer fittings

in-line, with LF 3000 push-in fittings



**7316**

| ØD |            |
|----|------------|
| 6  | 7316 06 00 |
| 8  | 7316 08 00 |
| 10 | 7316 10 00 |

Suitable fluid : compressed air  
Working pressure : 1 to 8 bar  
Working temperature :  
- 15° to + 60°C

## pneumatic sensor fittings

male thread BSPP and metric, with LF 3000 push-in connection





**7818**

| C      |            |
|--------|------------|
| M5x0,8 | 7818 04 19 |
| G1/8   | 7818 04 10 |
| G1/4   | 7818 04 13 |
| G3/8   | 7818 04 17 |
| G1/2   | 7818 04 21 |

Working pressure : 3 to 8 bar  
Working temperature :  
- 15° to + 60°C  
Breaking pressure : 0,6 bar  
Response time : 3 ms

# LF 3600

## chemical nickel-plated brass push-in fittings

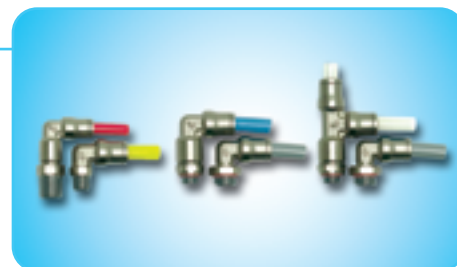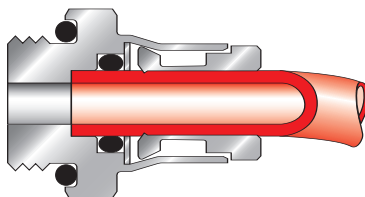

### Applications

- LF 3600 is compatible with **many liquids** and **gases** and is ideal for environments that require mechanical strength.
- suited to many specialist applications : **industrial, chemical, pharmaceutical** and **food** applications.
- components and chemical nickel coating are authorized by **FDA** standard (Food & Drug Administration). LF 3600 range is recommended in food process applications.

### Benefits

- **excellent resistance** to **abrasion** and **corrosion** due to high phosphorus chemical nickel plating of individual brass components.


- **time saving** and **simplicity** of installation : instant **manual** connection and disconnection, easy installation.
- **full flow** fluid passage, minimal pressure drop.
- **automatic sealing** of parallel threaded versions via an integral sub-base FKM seal.
- **compactness** due to **small overall** dimensions with inter-connectability for bespoke configurations.
- aesthetic with **modernised** external shapes



### ability to suit your requirements

Legris has developed semi-standard **LF 3600 models** for **specific applications** such as coffee machines.

Do not hesitate to contact us for further information.

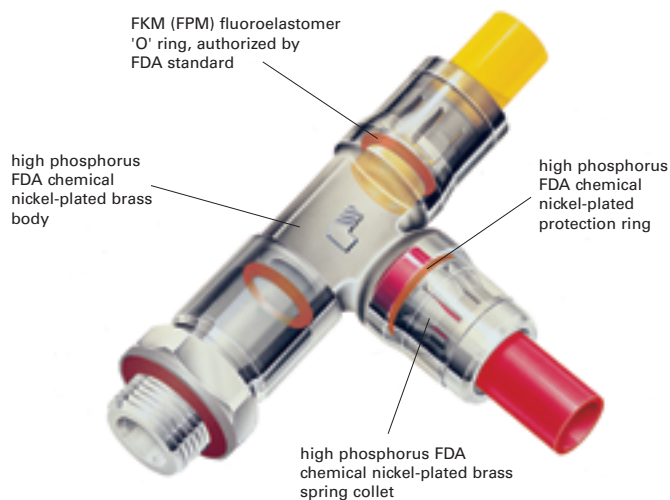

### Technical specifications

**suitable fluids :**  
all liquids and gases compatible with the materials of the fitting.

Examples : compressed air, cleaning/cold and hot water, steam, oils ...

**working pressure :**  
maximum 20 bar

**working temperature :**  
- 20° to + 120°C

**vacuum capability :**  
vacuum of 750 mm Hg (90% vacuum)

All items in the LF 3600 range are guaranteed **silicone free**.

**maximum tightening torque for LF 3600® fittings, BSPP and metric threads**

| Thread | M5 x0,8 | G1/8" | G1/4" | G3/8" | G1/2" |
|--------|---------|-------|-------|-------|-------|
| da N.m | 0,16    | 0,8   | 1,2   | 3     | 3,5   |

# LF3600 chemical nickel plated brass push-in fittings

## Designed to satisfy your requirements

### 3601



- automatic sealing of parallel thread via an integral sub-base FKM seal
- internal hexagon for installation in tight places
- high phosphorus chemical nickel plating of individual brass components for an excellent resistance to abrasion and corrosion
- "all metal" components (except seals) that allow working temperature from -20° to +120°C

male stud,  
BSP parallel and metric thread

### 3601

| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3601 04 19 |
| 4  | G1/8   | 3601 04 10 |
| 4  | G1/4   | 3601 04 13 |
| 6  | M5x0,8 | 3601 06 19 |
| 6  | G1/8   | 3601 06 10 |
| 6  | G1/4   | 3601 06 13 |
| 8  | G1/8   | 3601 08 10 |
| 8  | G1/4   | 3601 08 13 |
| 8  | G3/8   | 3601 08 17 |
| 10 | G1/4   | 3601 10 13 |
| 10 | G3/8   | 3601 10 17 |
| 10 | G1/2   | 3601 10 21 |
| 12 | G1/4   | 3601 12 13 |
| 12 | G3/8   | 3601 12 17 |
| 12 | G1/2   | 3601 12 21 |
| 14 | G3/8   | 3601 14 17 |
| 14 | G1/2   | 3601 14 21 |

female stud,  
metric thread



### 3614

| ØD | C    |            |
|----|------|------------|
| 4  | G1/8 | 3614 04 10 |
| 4  | G1/4 | 3614 04 13 |
| 6  | G1/8 | 3614 06 10 |
| 6  | G1/4 | 3614 06 13 |
| 8  | G1/8 | 3614 08 10 |
| 8  | G1/4 | 3614 08 13 |

male stud elbow,  
BSPP and metric thread

### 3699



| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3699 04 19 |
| 4  | G1/8   | 3699 04 10 |
| 4  | G1/4   | 3699 04 13 |
| 6  | G1/8   | 3699 06 10 |
| 6  | G1/4   | 3699 06 13 |
| 8  | G1/8   | 3699 08 10 |
| 8  | G1/4   | 3699 08 13 |
| 8  | G3/8   | 3699 08 17 |
| 10 | G1/4   | 3699 10 13 |
| 10 | G3/8   | 3699 10 17 |
| 12 | G1/4   | 3699 12 13 |
| 12 | G3/8   | 3699 12 17 |
| 12 | G1/2   | 3699 12 21 |
| 14 | G3/8   | 3699 14 17 |
| 14 | G1/2   | 3699 14 21 |

extended male stud elbow,  
BSPP and metric thread

### 3669



| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3669 04 19 |
| 4  | G1/8   | 3669 04 10 |
| 6  | G1/8   | 3669 06 10 |
| 6  | G1/4   | 3669 06 13 |
| 8  | G1/8   | 3669 08 10 |
| 8  | G1/4   | 3669 08 13 |

male stud branch tee,  
BSPP and metric thread

### 3698



| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3698 04 19 |
| 4  | G1/8   | 3698 04 10 |
| 6  | G1/8   | 3698 06 10 |
| 6  | G1/4   | 3698 06 13 |
| 8  | G1/8   | 3698 08 10 |
| 8  | G1/4   | 3698 08 13 |

male stud run tee,  
BSPP and metric thread

### 3693



| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3693 04 19 |
| 4  | G1/8   | 3693 04 10 |
| 6  | G1/8   | 3693 06 10 |
| 6  | G1/4   | 3693 06 13 |
| 8  | G1/8   | 3693 08 10 |
| 8  | G1/4   | 3693 08 13 |

equal tee

### 3604



| ØD |            |
|----|------------|
| 4  | 3604 04 00 |
| 6  | 3604 06 00 |
| 8  | 3604 08 00 |
| 10 | 3604 10 00 |
| 12 | 3604 12 00 |
| 14 | 3604 14 00 |

equal tube to tube connector

### 3606



| ØD |            |
|----|------------|
| 4  | 3606 04 00 |
| 6  | 3606 06 00 |
| 8  | 3606 08 00 |
| 10 | 3606 10 00 |
| 12 | 3606 12 00 |
| 14 | 3606 14 00 |

equal elbow

### 3602



| ØD |            |
|----|------------|
| 4  | 3602 04 00 |
| 6  | 3602 06 00 |
| 8  | 3602 08 00 |
| 10 | 3602 10 00 |
| 12 | 3602 12 00 |
| 14 | 3602 14 00 |

single banjo,  
BSPP and metric thread

### 3618



| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3618 04 19 |
| 4  | G1/8   | 3618 04 10 |
| 6  | M5x0,8 | 3618 06 19 |
| 6  | G1/8   | 3618 06 10 |
| 6  | G1/4   | 3618 06 13 |
| 8  | G1/8   | 3618 08 10 |
| 8  | G1/4   | 3618 08 13 |

equal bulkhead connector

### 3616



| ØD |            |
|----|------------|
| 4  | 3616 04 00 |
| 6  | 3616 06 00 |
| 8  | 3616 08 00 |
| 10 | 3616 10 00 |
| 12 | 3616 12 00 |
| 14 | 3616 14 00 |

plug-in reducer

### 3666



| ØD1 | ØD2 |            |
|-----|-----|------------|
| 4   | 6   | 3666 04 06 |
| 4   | 8   | 3666 04 08 |
| 6   | 8   | 3666 06 08 |
| 6   | 10  | 3666 06 10 |
| 6   | 12  | 3666 06 12 |
| 8   | 10  | 3666 08 10 |
| 8   | 12  | 3666 08 12 |
| 8   | 14  | 3666 08 14 |
| 10  | 12  | 3666 10 12 |
| 10  | 14  | 3666 10 14 |
| 12  | 14  | 3666 12 14 |

plug-in increaser

### 3668



| ØD1 | ØD2 |            |
|-----|-----|------------|
| 6   | 4   | 3668 06 04 |

blanking plug

### 3626



| ØD1 | ØD2 |            |
|-----|-----|------------|
| 4   | 6   | 3626 04 00 |
| 6   | 8   | 3626 06 00 |
| 8   | 10  | 3626 08 00 |
| 10  | 12  | 3626 10 00 |
| 12  | 14  | 3626 12 00 |
| 14  | 16  | 3626 14 00 |

# accessories and plugs

In order to offer **total connection** solutions, **Legris** provides users with a range of accessories and plugs, **suitable** for use with the different models featured in this Product Guide.

## nickel-plated brass accessories

### Designed to satisfy your requirements

**0904**



- enable **adaptation** to different types of female threads
- help to **minimise** stock holdings by limiting the number of part numbers to be used
- enhances the aesthetic appearance of installations
- optimised dimensions

### straight male equal/unequal adapter

**0900  
0901**



| ØD     | C      |            |
|--------|--------|------------|
| R1/8   | R1/8   | 0900 00 10 |
| R1/4   | R1/4   | 0900 00 13 |
| R3/8   | R3/8   | 0900 00 17 |
| R1/2   | R1/2   | 0900 00 21 |
| R3/4   | R3/4   | 0900 00 27 |
| R1"    | R1"    | 0900 00 34 |
| R1/8   | R1/4   | 0900 10 13 |
| R1/8   | R3/8   | 0900 10 17 |
| R1/4   | R3/8   | 0900 13 17 |
| R1/4   | R1/2   | 0900 13 21 |
| R3/8   | R1/2   | 0900 17 21 |
| R1/2   | R3/4   | 0900 21 27 |
| R3/4   | R1"    | 0900 27 34 |
| M5x0,8 | M5x0,8 | 0901 00 19 |
| M5x0,8 | G1/8"  | 0901 19 10 |

### straight female, BSPP and M5 equal/unequal adapter

**0902**



| ØD     | C      |            |
|--------|--------|------------|
| M5x0,8 | M5x0,8 | 0902 00 19 |
| G1/8   | G1/8   | 0902 00 10 |
| G1/4   | G1/4   | 0902 00 13 |
| G3/8   | G3/8   | 0902 00 17 |
| G1/2   | G1/2   | 0902 00 21 |
| G3/4   | G3/4   | 0902 00 27 |

### equal female stud elbow BSPP, male BSPT and M5 thread

**0913**



| ØD   | C    |            |
|------|------|------------|
| G1/8 | R1/8 | 0913 00 10 |
| G1/4 | R1/4 | 0913 00 13 |
| G3/8 | R3/8 | 0913 00 17 |
| G1/2 | R1/2 | 0913 00 21 |
| G3/4 | R3/4 | 0913 00 27 |

### reducer male BSP taper to female BSP parallel

**0904**



| ØD   | C    |            |
|------|------|------------|
| R1/4 | G1/8 | 0904 10 13 |
| R3/8 | G1/8 | 0904 10 17 |
| R3/8 | G1/4 | 0904 13 17 |
| R1/2 | G1/4 | 0904 13 21 |
| R1/2 | G3/8 | 0904 17 21 |
| R3/4 | G3/8 | 0904 17 27 |
| R3/4 | G1/2 | 0904 21 27 |

### equal female stud elbow, BSPP and M5 thread

**0912**



| ØD     |  |            |
|--------|--|------------|
| M5x0,8 |  | 0912 00 19 |
| G1/8   |  | 0912 00 10 |
| G1/4   |  | 0912 00 13 |
| G3/8   |  | 0912 00 17 |
| G1/2   |  | 0912 00 21 |
| G3/4   |  | 0912 00 27 |

### equal male stud elbow, BSPP and M5 thread

**0914**



| ØD   |  |            |
|------|--|------------|
| R1/8 |  | 0914 00 10 |
| R1/4 |  | 0914 00 13 |
| R3/8 |  | 0914 00 17 |
| R1/2 |  | 0914 00 21 |
| R3/4 |  | 0914 00 27 |

### equal female tee, BSPP and M5 thread

**0915**



| ØD     |  |            |
|--------|--|------------|
| M5x0,8 |  | 0915 00 19 |
| G1/8   |  | 0915 00 10 |
| G1/4   |  | 0915 00 13 |
| G3/8   |  | 0915 00 17 |
| G1/2   |  | 0915 00 21 |
| G3/4   |  | 0915 00 27 |

### equal "Y" female BSPP thread

**0910**



| ØD   |  |            |
|------|--|------------|
| G1/8 |  | 0910 00 10 |
| G1/4 |  | 0910 00 13 |
| G3/8 |  | 0910 00 17 |
| G1/2 |  | 0910 00 21 |

### male stud branch tee, female BSPP, male BSPT

**0916**



| ØD   | C    |            |
|------|------|------------|
| G1/8 | R1/8 | 0916 00 10 |
| G1/4 | R1/4 | 0916 00 13 |
| G3/8 | R3/8 | 0916 00 17 |
| G1/2 | R1/2 | 0916 00 21 |
| G3/4 | R3/4 | 0916 00 27 |

### equal female cross, BSPP thread

**0908**



| ØD   |  |            |
|------|--|------------|
| R1/8 |  | 0908 00 10 |
| R1/4 |  | 0908 00 13 |
| R3/8 |  | 0908 00 17 |
| R1/2 |  | 0908 00 21 |
| R3/4 |  | 0908 00 27 |

### reducer male to female BSPP and M5 thread

**0905**



| ØD   |  |            |
|------|--|------------|
| G1/8 |  | 0905 00 10 |
| G1/4 |  | 0905 00 13 |
| G3/8 |  | 0905 00 17 |
| G1/2 |  | 0905 00 21 |

### equal extended adaptor male/female BSPP thread

**0907**



| ØD   |  |               |
|------|--|---------------|
| G1/8 |  | 0907 00 10    |
| G1/8 |  | 0907 00 10 01 |
| G1/4 |  | 0907 00 13    |
| G1/4 |  | 0907 00 13 01 |

### tailpiece adaptor for rubber hose, male BSPP and M5 thread

**0931**



| ØD | C    |            |
|----|------|------------|
| 6  | G1/8 | 0931 06 10 |
| 6  | G1/4 | 0931 06 13 |
| 7  | G1/8 | 0931 07 10 |
| 7  | G1/4 | 0931 07 13 |
| 7  | G3/8 | 0931 07 17 |
| 8  | G1/8 | 0931 08 10 |
| 8  | G1/4 | 0931 08 13 |
| 8  | G3/8 | 0931 08 17 |
| 10 | G1/4 | 0931 10 13 |
| 10 | G3/8 | 0931 10 17 |
| 10 | G1/2 | 0931 10 21 |
| 15 | G3/8 | 0931 15 17 |
| 15 | G1/2 | 0931 15 21 |
| 18 | G1/2 | 0931 18 21 |

### female bulkhead connector, BSPP and M5

**0920**



| C      | C1      |            |
|--------|---------|------------|
| M5x0,8 | M10x1   | 0920 00 19 |
| G1/8   | M16x1,5 | 0920 00 10 |
| G1/4   | M20x1,5 | 0920 00 13 |
| G3/8   | M26x1,5 | 0920 00 17 |
| G1/2   | M28x1,5 | 0920 00 21 |

### Technical specifications of nickel-plated brass accessories

working pressure : maximum 60 bar

working temperature : -10° to + 80°C

# accessories and plugs

## plugs

internal hexagon head  
BSP taper

**0205** C 

|        |            |
|--------|------------|
| R1/8   | 0205 10 00 |
| R1/4   | 0205 13 00 |
| R3/8   | 0205 17 00 |
| R1/2   | 0205 21 00 |
| R3/4   | 0205 27 00 |
| R1"    | 0205 34 00 |
| R1"1/4 | 0205 42 00 |

brass

internal hexagon headed,  
BSP taper

**0285** ØD 

|      |            |
|------|------------|
| R1/8 | 0285 10 00 |
| R1/4 | 0285 13 00 |
| R3/8 | 0285 17 00 |
| R1/2 | 0285 21 00 |
| R3/4 | 0285 27 00 |

stainless steel 316L

## sealing accessories

copper washers

**0138** ØD C 

|         |            |
|---------|------------|
| 10 G1/8 | 0138 10 00 |
| 13 G1/4 | 0138 13 00 |
| 17 G3/8 | 0138 17 00 |
| 21 G1/2 | 0138 21 00 |
| 27 G3/4 | 0138 27 00 |
| 33 G1"  | 0138 33 00 |

fluoropolymer tape

**0605** 

0605 12 12

## silencers

threaded silencer,  
BSPP and M5 thread

**0670** ØD 

|      |            |
|------|------------|
| G1/8 | 0670 00 10 |
| G1/4 | 0670 00 13 |
| G3/8 | 0670 00 17 |
| G1/2 | 0670 00 21 |
| G3/4 | 0670 00 27 |

sintered bronze

threaded silencer,  
BSPP and M5 thread

**0673** ØD 

|        |            |
|--------|------------|
| G1/8   | 0673 00 10 |
| G1/4   | 0673 00 13 |
| G3/8   | 0673 00 17 |
| M5x0,8 | 0673 00 19 |
| G1/2   | 0673 00 21 |

brass and sintered bronze

flow control silencer,  
BSPP thread

**0672** ØD 

|      |            |
|------|------------|
| G1/8 | 0672 00 10 |
| G1/4 | 0672 00 13 |
| G3/8 | 0672 00 17 |
| G1/2 | 0672 00 21 |

brass and sintered bronze

threaded silencer,  
BSPP and M5 thread

**0674** ØD 

|        |            |
|--------|------------|
| M5x0,8 | 0674 00 19 |
| G1/8   | 0674 00 10 |
| G1/4   | 0674 00 13 |
| G3/8   | 0674 00 17 |
| G1/2   | 0674 00 21 |
| G3/4   | 0674 00 27 |

polyethylen

threaded silencer,  
BSPP thread

**0682** ØD 

|      |            |
|------|------------|
| G1/8 | 0682 00 10 |
| G1/4 | 0682 00 13 |
| G3/8 | 0682 00 17 |
| G1/2 | 0682 00 21 |
| G3/4 | 0682 00 27 |

stainless steel 316L

### Technical specifications of silencers

working pressure :

sintered bronze : 12 bar

polyethynene : 10 bar

stainless steel : 12 bar

working temperature :

-20° to + 150°C

-10° to + 80°C

-20° to + 180°C

## aluminium anodised manifolds

female manifold  
BSPP and M5 thread

**3311** ØD C 

|             |               |
|-------------|---------------|
| G1/8 M5x0,8 | 3311 19 10 07 |
| G1/4 G1/8   | 3311 10 13 02 |
| G1/4 G1/8   | 3311 10 13 03 |
| G1/4 G1/8   | 3311 10 13 04 |
| G1/4 G1/8   | 3311 10 13 05 |
| G1/4 G1/8   | 3311 10 13 06 |
| G3/8 G1/4   | 3311 13 17 02 |
| G3/8 G1/4   | 3311 13 17 03 |
| G3/8 G1/4   | 3311 13 17 04 |
| G3/8 G1/4   | 3311 13 17 05 |
| G3/8 G1/4   | 3311 13 17 06 |

female cross manifold  
BSPP and M5 thread

**3312** ØD 

|        |            |
|--------|------------|
| M5x0,8 | 3312 00 19 |
| G1/8   | 3312 00 10 |
| G1/4   | 3312 00 13 |
| G3/8   | 3312 00 17 |
| G1/2   | 3312 00 21 |

double female manifold  
BSPP thread

**3313** ØD C 

|           |               |
|-----------|---------------|
| G1/4 G1/8 | 3313 10 13 02 |
| G1/4 G1/8 | 3313 10 13 03 |
| G1/4 G1/8 | 3313 10 13 04 |
| G1/4 G1/8 | 3313 10 13 05 |
| G3/8 G1/4 | 3313 13 17 02 |
| G3/8 G1/4 | 3313 13 17 03 |
| G3/8 G1/4 | 3313 13 17 04 |
| G3/8 G1/4 | 3313 13 17 05 |
| G1/2 G1/4 | 3313 13 21 03 |
| G1/2 G1/4 | 3313 13 21 04 |
| G1/2 G1/4 | 3313 13 21 05 |

### Technical specifications of aluminium anodised manifolds

working pressure : maximum 20 bar

working temperature : -10° to + 80°C

# Stainless steel fittings : LF 3800 push-in fittings and function fittings



## Applications

- designed for excellent resistance to aggressive/corrosive environments and fluids, these ranges are suitable for installation in many harsh and aggressive industrial applications.
- examples of LF 3800 applications : laboratories, medical sector, food and drinks processing, paint and printing industries.
- examples of flow control applications : pneumatic, food and pharmaceutical processing, semi-conductor industry.

## Benefits

### LF 3800 push-in fittings

- all stainless steel construction with FKM 'O' ring seals, they offer excellent resistance to aggressive fluids and environments
- allow instant manual connection and disconnection
- compact, they guarantee full bore fluid passage with minimal pressure drop
- multiple configurations
- allow connection with several types of Legris tubing shown in this Product guide : nylon tubing, polyurethane tubing, fluoropolymer FEP tubing and polyethylene tubing
- a range of stainless steel accessories in order to offer total connection solutions



## Flow control regulators


- control the speed of a pneumatic cylinder in aggressive environments or submitted to high mechanical or chemical constraints.
- designed without bacterial retention zones, they provide excellent resistance to detergents and enables easy cleaning in a wide variety of application areas.
- working pressure : 1 to 10 bar
- working temperature : 0° to 70°C

## Technical specifications

**suitable fluids :**  
all fluids compatible with fitting and tubing materials

**working pressure :**  
maximum 20 bar

**working temperature :**  
- 15° to + 110°C

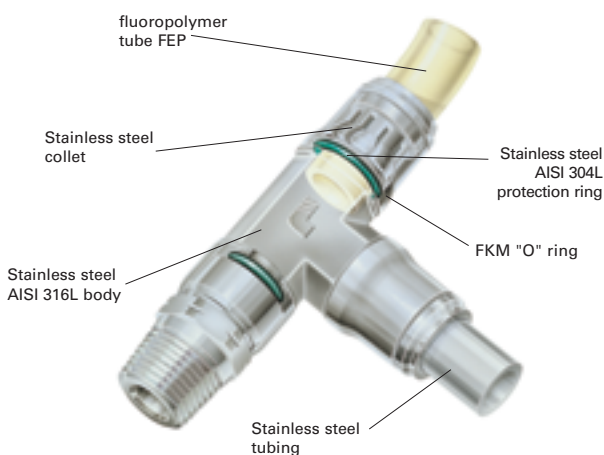

All items in the LF 3800 range are guaranteed **silicone free**.

**maximum tightening torque for LF 3800 fittings, BSPP and metric threads**

|        |        |       |
|--------|--------|-------|
| Thread | M5x0,8 | G1/8" |
| da N.m | 0,16   | 0,8   |


# stainless steel LF 3800 push-in fittings and function fittings

## Designed to satisfy your requirements

### 3821



- with this male stud standpipe, tees and elbows can be fitted where required



- by using this product, stock of parts may be reduced
- available for metric or imperial tube with BSPT or NPT threads

male stud, BSPT, BSPP and metric thread

### 3805



| ØD | C    |            |
|----|------|------------|
| 4  | R1/8 | 3805 04 10 |
| 4  | R1/4 | 3805 04 13 |
| 6  | R1/8 | 3805 06 10 |
| 6  | R1/4 | 3805 06 13 |
| 8  | R1/8 | 3805 08 10 |
| 8  | R1/4 | 3805 08 13 |
| 8  | R3/8 | 3805 08 17 |
| 10 | R1/4 | 3805 10 13 |
| 10 | R3/8 | 3805 10 17 |
| 12 | R1/4 | 3805 12 13 |
| 12 | R3/8 | 3805 12 17 |
| 12 | R1/2 | 3805 12 21 |

### 3801



| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3801 04 19 |
| 4  | G1/8   | 3801 04 10 |

male stud standpipe, BSPT thread

### 3821



| ØD | C    |            |
|----|------|------------|
| 4  | R1/8 | 3821 04 10 |
| 6  | R1/8 | 3821 06 10 |
| 6  | R1/4 | 3821 06 13 |
| 8  | R1/8 | 3821 08 10 |
| 8  | R1/4 | 3821 08 13 |
| 10 | R1/4 | 3821 10 13 |
| 10 | R3/8 | 3821 10 17 |
| 12 | R1/4 | 3821 12 13 |
| 12 | R3/8 | 3821 12 17 |
| 12 | R1/2 | 3821 12 21 |

male stud elbow, BSPT and metric thread

### 3809



| ØD | C    |            |
|----|------|------------|
| 4  | R1/8 | 3809 04 10 |
| 6  | R1/8 | 3809 06 10 |
| 6  | R1/4 | 3809 06 13 |
| 8  | R1/8 | 3809 08 10 |
| 8  | R1/4 | 3809 08 13 |
| 10 | R1/4 | 3809 10 13 |
| 10 | R3/8 | 3809 10 17 |

### 3899



| ØD | C      |            |
|----|--------|------------|
| 4  | M5x0,8 | 3899 04 19 |

compact male stud elbow, BSPT thread

### 3889



| ØD | C    |            |
|----|------|------------|
| 4  | R1/8 | 3889 04 10 |
| 4  | R1/4 | 3889 04 13 |
| 6  | R1/8 | 3889 06 10 |
| 6  | R1/4 | 3889 06 13 |
| 8  | R1/8 | 3889 08 10 |
| 8  | R1/4 | 3889 08 13 |
| 10 | R1/4 | 3889 10 13 |
| 10 | R3/8 | 3889 10 17 |
| 12 | R1/4 | 3889 12 13 |
| 12 | R3/8 | 3889 12 17 |
| 12 | R1/2 | 3889 12 21 |

equal elbow

### 3802



| ØD |            |
|----|------------|
| 4  | 3802 04 00 |
| 6  | 3802 06 00 |
| 8  | 3802 08 00 |
| 10 | 3802 10 00 |
| 12 | 3802 12 00 |

equal straight connector

### 3806



| ØD |            |
|----|------------|
| 4  | 3806 04 00 |
| 6  | 3806 06 00 |
| 8  | 3806 08 00 |
| 10 | 3806 10 00 |
| 12 | 3806 12 00 |

equal tee

### 3804



| ØD |            |
|----|------------|
| 4  | 3804 04 00 |
| 6  | 3804 06 00 |
| 8  | 3804 08 00 |
| 10 | 3804 10 00 |
| 12 | 3804 12 00 |

equal bulkhead connector

### 3816



| ØD |            |
|----|------------|
| 4  | 3816 04 00 |
| 6  | 3816 06 00 |
| 8  | 3816 08 00 |
| 10 | 3816 10 00 |
| 12 | 3816 12 00 |

push-in reducer

### 3866



| ØD |               |
|----|---------------|
| 4  | 6 3866 04 06  |
| 4  | 8 3866 04 08  |
| 6  | 8 3866 06 08  |
| 6  | 10 3866 06 10 |
| 8  | 10 3866 08 10 |
| 8  | 12 3866 08 12 |
| 10 | 12 3866 10 12 |

## flow control regulators

with threaded fitting, BSPP and metric – recessed adjustment screw



### 7810



| C1-C2 |            |
|-------|------------|
| G1/8  | 7810 10 10 |
| G1/4  | 7810 13 13 |
| G3/8  | 7810 17 17 |
| G1/2  | 7810 21 21 |

for pneumatic applications

with threaded fitting, BSPP and metric – recessed adjustment screw



### 7812



| C1-C2  |            |
|--------|------------|
| G1/8   | 7812 10 10 |
| G1/4   | 7812 13 13 |
| G3/8   | 7812 17 17 |
| M5x0,8 | 7812 19 19 |
| G1/2   | 7812 21 21 |

for pneumatic applications

## non-return valves

unidirectional, female-female, BSPP thread



### 4890



| C    | DN |            |
|------|----|------------|
| G1/8 | 10 | 4890 10 10 |
| G1/4 | 10 | 4890 13 13 |
| G3/8 | 15 | 4890 17 17 |
| G1/2 | 15 | 4890 21 21 |
| G3/4 | 20 | 4890 27 27 |
| G1"  | 25 | 4890 34 34 |

working pressure : 0,5 to 40 bar  
working temperature : -20° to +180°C  
materials :  
- body : stainless steel  
- 'O' ring seals : FKM

# stainless steel accessories

equal elbow,  
female BSPP thread

**1843** C 

|      |            |
|------|------------|
| G1/8 | 1843 10 10 |
| G1/4 | 1843 13 13 |
| G3/8 | 1843 17 17 |
| G1/2 | 1843 21 21 |



equal tee,  
triple female BSPP thread

**1845** C 

|      |            |
|------|------------|
| G1/8 | 1845 10 10 |
| G1/4 | 1845 13 13 |
| G3/8 | 1845 17 17 |
| G1/2 | 1845 21 21 |



double female sleeve,  
BSPP thread

**1855** C 

|      |            |
|------|------------|
| G1/8 | 1855 10 10 |
| G1/4 | 1855 13 13 |
| G3/8 | 1855 17 17 |
| G1/2 | 1855 21 21 |



bulkhead adaptor,  
BSPP thread

**1817** C 

|      |            |
|------|------------|
| G1/8 | 1817 00 10 |
| G1/4 | 1817 00 13 |
| G3/8 | 1817 00 17 |
| G1/2 | 1817 00 21 |



reducer/increaser double female  
sleeve, BSPP thread

**1862** C1 C2 

|      |      |            |
|------|------|------------|
| G1/4 | G1/8 | 1862 13 10 |
| G3/8 | G1/8 | 1862 17 10 |
| G3/8 | G1/4 | 1862 17 13 |
| G1/2 | G1/4 | 1862 21 13 |
| G1/2 | G3/8 | 1862 21 17 |



male NPT to female  
BSPP adapter

**1864** C1 C2 

|     |      |            |
|-----|------|------------|
| 1/8 | G1/8 | 1864 11 10 |
| 1/4 | G1/4 | 1864 14 13 |
| 3/8 | G3/8 | 1864 18 17 |
| 1/2 | G1/2 | 1864 22 21 |



male BSPT to female  
NPT adaptor

**1867** C1 C2 

|      |     |            |
|------|-----|------------|
| R1/8 | 1/8 | 1867 10 11 |
| R1/4 | 1/4 | 1867 13 14 |
| R3/8 | 3/8 | 1867 17 18 |
| R1/2 | 1/2 | 1867 21 22 |



reducer male BSPT to female  
BSPP

**1863** C1 C2 

|      |      |            |
|------|------|------------|
| R1/4 | G1/8 | 1863 13 10 |
| R3/8 | G1/8 | 1863 17 10 |
| R3/8 | G1/4 | 1863 17 13 |
| R1/2 | G1/4 | 1863 21 13 |
| R1/2 | G3/8 | 1863 21 17 |



straight male  
BSPT equal/unequal adaptor

**1821** C1 C2 

|      |      |            |
|------|------|------------|
| R1/8 | R1/8 | 1821 10 10 |
| R1/4 | R1/8 | 1821 13 10 |
| R1/4 | R1/4 | 1821 13 13 |
| R3/8 | R1/4 | 1821 17 13 |
| R3/8 | R3/8 | 1821 17 17 |
| R1/2 | R3/8 | 1821 21 17 |
| R1/2 | R1/2 | 1821 21 21 |



tailpiece adaptor for rubber hose,  
male NPT

**1823** ØD C 

|    |      |            |
|----|------|------------|
| 7  | R1/8 | 1823 07 10 |
| 7  | R1/4 | 1823 07 13 |
| 10 | R1/4 | 1823 10 13 |
| 10 | R3/8 | 1823 10 17 |
| 13 | R3/8 | 1823 13 17 |
| 16 | R1/2 | 1823 16 21 |



internal hexagon headed,  
BSP taper

**0285** 

|      |            |
|------|------------|
| ØD   |            |
| R1/8 | 0285 10 00 |
| R1/4 | 0285 13 00 |
| R3/8 | 0285 17 00 |
| R1/2 | 0285 21 00 |
| R3/4 | 0285 27 00 |



threaded silencer,  
BSPP thread

**0682** 

|      |            |
|------|------------|
| ØD   |            |
| G1/8 | 0682 00 10 |
| G1/4 | 0682 00 13 |
| G3/8 | 0682 00 17 |
| G1/2 | 0682 00 21 |
| G3/4 | 0682 00 27 |




ferrule for plastic and  
fluoropolymer tubing

**1827** ØD1 ØD2 

|     |    |    |            |
|-----|----|----|------------|
| ØD1 | 6  | 4  | 1827 06 00 |
|     | 8  | 6  | 1827 08 00 |
|     | 10 | 8  | 1827 10 00 |
|     | 12 | 10 | 1827 12 00 |
|     | 16 | 14 | 1827 16 00 |

ØD2



This ferrule is necessary when using nylon, polyethylene and fluoropolymer FEP tubing at all temperatures compatible with the fitting/tube assembly.

# Technical tubes and hoses

## Applications

The extensive compatibility of Legris fittings/technical tubes and hoses is ideally suited for **many industrial and food applications**. Legris' policy is to be able to offer its customers a **full range** of tubes and hoses, compatible with the different ranges of fittings featured in this product guide.

The overview below illustrates the **best choices** to obtain the **best performance** of the fitting/tube connection.

## Nylon tubing

|                                                                                                                                                                                                                                                                | connections                                                                                                                                                                                                                                     | applications                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>semi-rigid</b><br>                                                                                                                                                          | LF 3000®, LF 3600, LF 3800 <b>push-in fittings</b><br><br><b>adaptors</b><br> | pneumatic systems<br> |
| <b>benefits :</b> <ul style="list-style-type: none"> <li>- large range of working temperatures and pressures</li> <li>- good chemical resistance</li> <li>- 7 colours for easy identification of circuits</li> <li>- close tolerance, 3 mm to 16 mm</li> </ul> |                                                                                                                                                                                                                                                 |                                                                                                        |

## Polyurethane tubing

|                                                                                                                                                                                                                                                                                            | connections                                                                                                                                                                                                                                         | applications                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| <b>polyester</b><br>                                                                                                                                                                                     | LF 3000®, LF 3600, LF 3800 <b>push-in fittings</b><br><br><b>adaptors</b><br> | pneumatic systems<br> |
| <b>benefits :</b> <ul style="list-style-type: none"> <li>- large range of working temperatures and pressures</li> <li>- high flexibility</li> <li>- good chemical resistance</li> <li>- 6 colours for easy identification of circuits</li> <li>- close tolerance, 4 mm to 14 mm</li> </ul> |                                                                                                                                                                                                                                                     |                                                                                                          |

## Fluoropolymer FEP tube



|                                                                                                                                                                                                | connections                                                                                                                     | applications                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                              | LF 3600, LF 3800 <b>push-in fittings</b><br> | food industry and aggressive environment<br> |
| <b>benefits :</b> <ul style="list-style-type: none"> <li>- excellent resistance to chemicals and high temperature</li> <li>- food quality</li> <li>- close tolerance, 4 mm to 12 mm</li> </ul> |                                                                                                                                 |                                                                                                                                 |

## Recoil tubing

|                                                                                                                                                                                                                                                | connections                                                                                                                                                                                                                                        | applications                                                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| <b>polyurethane with integral 1/4" BSP taper fitting</b><br>                                                                                               | C 9000 and metal <b>quick acting couplers</b><br><br><b>Blowguns</b><br> | pneumatic equipment<br> |
| <b>benefits :</b> <ul style="list-style-type: none"> <li>- the coil will continue to contract after multiple use</li> <li>- high flexibility</li> <li>- good chemical resistance</li> <li>- 3 colours</li> <li>- 4 mm to 12 mm o.d.</li> </ul> |                                                                                                                                                                                                                                                    |                                                                                                              |

## Braided PVC hose



|                                                                                                                                                                      | connections                                                                                                                                                                                                                                    | applications                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                    | <b>adaptors</b><br><br>C 9000 and metal <b>quick acting couplers</b><br> | suitable for use with food and industrial fluids<br> |
| <b>benefits :</b> <ul style="list-style-type: none"> <li>- translucent for visual checking of fluid</li> <li>- food quality</li> <li>- 8 mm to 26 mm o.d.</li> </ul> |                                                                                                                                                                                                                                                |                                                                                                                                         |

In order to obtain the best performance of the fitting/tube connection, the technical specifications of each component should be taken into account by the user.

 = suitable for food applications

# technical tubes and hoses

## close tolerance semi-rigid nylon tubing

| 1025P close tolerance semi-rigid nylon tubing, 25 m rolls |              |                                                       |                                                                                   |                                                                                     |                                                                                     |
|-----------------------------------------------------------|--------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| o.d. tube mm                                              | i.d. tube mm | R minimum bend radius for tube at ambient temp. in mm |  |  |  |
| 4                                                         | 2,7          | 30                                                    | 1025P04 00 27                                                                     | 1025P04 01 27                                                                       | 1025P04 04 27                                                                       |
| 6                                                         | 4            | 35                                                    | 1025P06 00                                                                        | 1025P06 01                                                                          | 1025P06 04                                                                          |
| 8                                                         | 6            | 55                                                    | 1025P08 00                                                                        | 1025P08 01                                                                          | 1025P08 04                                                                          |
| 10                                                        | 7,5          | 75                                                    | 1025P10 00 75                                                                     | 1025P10 01 75                                                                       | 1025P10 04 75                                                                       |
| 12                                                        | 9            | 75                                                    | 1025P12 00 09                                                                     | 1025P12 01 09                                                                       | 1025P12 04 09                                                                       |
| 14                                                        | 11           | 120                                                   | 1025P14 00 11                                                                     | 1025P14 01 11                                                                       | 1025P14 04 11                                                                       |

| 1100P close tolerance semi-rigid nylon tubing, 100 m rolls |              |                                                       |                                                                                   |                                                                                     |                                                                                     |
|------------------------------------------------------------|--------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| o.d. tube mm                                               | i.d. tube mm | R minimum bend radius for tube at ambient temp. in mm |  |  |  |
| 4                                                          | 2,7          | 30                                                    | 1100P04 00 27                                                                     | 1100P04 01 27                                                                       | 1100P04 04 27                                                                       |
| 6                                                          | 4            | 35                                                    | 1100P06 00                                                                        | 1100P06 01                                                                          | 1100P06 04                                                                          |
| 8                                                          | 6            | 55                                                    | 1100P08 00                                                                        | 1100P08 01                                                                          | 1100P08 04                                                                          |
| 10                                                         | 7,5          | 75                                                    | 1100P10 00 75                                                                     | 1100P10 01 75                                                                       |                                                                                     |

## close tolerance flexible polyurethane tubing

| 1025U close tolerance flexible polyurethane tubing, 25 m rolls |              |                                                       |                                                                                                  |                                                                                                    |                                                                                                            |
|----------------------------------------------------------------|--------------|-------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| o.d. tube mm                                                   | i.d. tube mm | R minimum bend radius for tube at ambient temp. in mm | <br>polyester | <br>polyester | <br>polyether crystal |
| 4                                                              | 2,5          | 10                                                    | 1025U04 01                                                                                       | 1025U04 04                                                                                         | 1025U04R08                                                                                                 |
| 6                                                              | 4            | 15                                                    | 1025U06 01                                                                                       | 1025U06 04                                                                                         | 1025U06R08                                                                                                 |
| 8                                                              | 5,5          | 20                                                    | 1025U08 01                                                                                       | 1025U08 04                                                                                         | 1025U08R08                                                                                                 |
| 10                                                             | 7            | 25                                                    | 1025U10 01                                                                                       | 1025U10 04                                                                                         | 1025U10R08                                                                                                 |
| 12                                                             | 8            | 35                                                    | 1025U12 01                                                                                       |                                                                                                    | 1025U12R08                                                                                                 |
| 14                                                             | 9,5          | 45                                                    | 1025U14 01 95                                                                                    |                                                                                                    | 1025U14R08 95                                                                                              |

| 1100U close tolerance flexible polyurethane tubing, 100 m rolls |              |                                                       |                                                                                                  |                                                                                                    |  |
|-----------------------------------------------------------------|--------------|-------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--|
| o.d. tube mm                                                    | i.d. tube mm | R minimum bend radius for tube at ambient temp. in mm | <br>polyester | <br>polyester |  |
| 4                                                               | 2,5          | 10                                                    | 1100U04 01                                                                                       | 1100U04 04                                                                                         |  |
| 6                                                               | 4            | 15                                                    | 1100U06 01                                                                                       | 1100U06 04                                                                                         |  |
| 8                                                               | 5,5          | 20                                                    | 1100U08 01                                                                                       | 1100U08 04                                                                                         |  |

## close tolerance fluoropolymer FEP tube

 = suitable for food applications

| 1005T - 1025T |              |                                                       |                                                                                                           |                                                                                                              |  |
|---------------|--------------|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--|
| o.d. tube mm  | i.d. tube mm | R minimum bend radius for tube at ambient temp. in mm | in 5 m rolls white<br> | in 25 m rolls white<br> |  |
| 4             | 2,5          | 40                                                    | 1005T04 00 25                                                                                             | 1025T04 00 25                                                                                                |  |
| 6             | 4            | 50                                                    | 1005T06 00                                                                                                | 1025T06 00                                                                                                   |  |
| 8             | 6            | 70                                                    | 1005T08 00                                                                                                | 1025T08 00                                                                                                   |  |
| 10            | 8            | 120                                                   | 1005T10 00                                                                                                | 1025T10 00                                                                                                   |  |
| 12            | 10           | 180                                                   | 1005T12 00                                                                                                | 1025T12 00                                                                                                   |  |

# technical tubes and hoses

## close tolerance polyester polyurethane recoil tubing

| 1470U polyester polyurethane recoil tubing, 2 m long, with BSPT thread connections |              |             |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                       |                                        |                                                                                     |
|------------------------------------------------------------------------------------|--------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------|
| o.d. tube mm                                                                       | i.d. tube mm | BSPT thread |  |  |  |  | length of long straight section in mm | length of short straight section in mm |  |
| 8                                                                                  | 5            | R1/4        | 1470U08 03 13                                                                     | 1470U08 04 13                                                                     | 1470U08 05 13                                                                     | 190                                                                                | 500                                   | 100                                    | 42                                                                                  |

| 1471U polyester polyurethane recoil tubing, 4 m long, with BSPT thread connections |              |             |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                       |                                        |                                                                                     |
|------------------------------------------------------------------------------------|--------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------|
| o.d. tube mm                                                                       | i.d. tube mm | BSPT thread |  |  |  |  | length of long straight section in mm | length of short straight section in mm |  |
| 8                                                                                  | 5            | R1/4        | 1471U08 03 13                                                                     | 1471U08 04 13                                                                     | 1471U08 05 13                                                                     | 400                                                                                | 500                                   | 100                                    | 42                                                                                  |

| 1472U polyester polyurethane recoil tubing, 6 m long, with BSPT thread connections |              |             |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                       |                                        |                                                                                     |
|------------------------------------------------------------------------------------|--------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------------------|----------------------------------------|-------------------------------------------------------------------------------------|
| o.d. tube mm                                                                       | i.d. tube mm | BSPT thread |  |  |  |  | length of long straight section in mm | length of short straight section in mm |  |
| 8                                                                                  | 5            | R1/4        | 1472U08 03 13                                                                     | 1472U08 04 13                                                                     | 1472U08 05 13                                                                     | 650                                                                                | 500                                   | 100                                    | 42                                                                                  |

## braided PVC hose

 = suitable for food applications

| 1025V        |              |                                                       |                                                                                       | in 25 m rolls white |
|--------------|--------------|-------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------|
| o.d. tube mm | i.d. tube mm | R minimum bend radius for tube at ambient temp. in mm |  |                     |
| 11           | 6            | 12                                                    |                                                                                       | 1025V11 00 06       |
| 14           | 8            | 16                                                    |                                                                                       | 1025V14 00 08       |
| 16           | 10           | 25                                                    |                                                                                       | 1025V16 00 10       |

## accessories

### clip strips for tubes

**Clip**



| ØD |  |
|----|-------------------------------------------------------------------------------------|
| 4  | Clip 04 00                                                                          |
| 6  | Clip 06 00                                                                          |
| 8  | Clip 08 00                                                                          |
| 10 | Clip 10 00                                                                          |
| 12 | Clip 12 00                                                                          |
| 14 | Clip 14 00                                                                          |

### tube cutter

**3000 71 00**



3000 71 00

### clip for PVC braided tube

**0697**



| ØD |  |
|----|---------------------------------------------------------------------------------------|
| 8  | 0697 00 01                                                                            |
| 10 | 0697 00 02                                                                            |
| 11 | 0697 00 02                                                                            |
| 13 | 0697 00 02                                                                            |
| 15 | 0697 00 03                                                                            |
| 18 | 0697 00 03                                                                            |
| 21 | 0697 00 04                                                                            |
| 26 | 0697 00 05                                                                            |

Delivered in boxes of 10 strips of the same diameter (complete with self-tapping screws of 9.5 mm length).

This tool will cut all resilient plastic tube (nylon, FEP, polyurethane, braided PVC) from 4mm to 14mm diameter inclusive. It is designed to give a clean cut at right angles to the tube axis. A spring maintains the cutter in the closed position.

# Quick acting couplers



## Applications

- for installations which require **frequent connection** or **disconnection** whether two hoses or a single hose and connection point.
- suitable for **all applications** and **equipment** working with **compressed air** and **vacuum** (metal quick acting couplers). For examples : pneumatic tools, pneumatic automation equipment, etc.



## Benefits

### Polymer C 9000 quick acting safety couplers

- **100% safety** : even if disconnection is performed rapidly, the safety of the end-users is guaranteed thanks to a very short vent-time. Comply with **ISO 4414** and **EN 983** safety standards.
- very high **flow** and extremely small pressure loss
- perfectly controlled **sealing**
- **high impact** composite material **resistant** to shocks and scratching
- excellent **mechanical strength** : extending lifetime performance and reliability
- virtually **effortless** connection and disconnection

### Metal quick acting couplers


- flow capacities from 165 NI/min to 3500 NI/min
- a complete range for water, compressed air and vacuum
- manufactured with **robust** material
- **easy** to install : automatic connection, with one hand, and instant disconnection by simply pulling back the sleeve
- maximum working pressure : **35 bar**
- **vacuum** capability



## Technical specifications

### Polymer C 9000 quick acting safety couplers

**suitable fluid** :  
compressed air  
**working pressure** :  
0 to 16 bar  
**working temperature** :  
- 20° to + 60°C

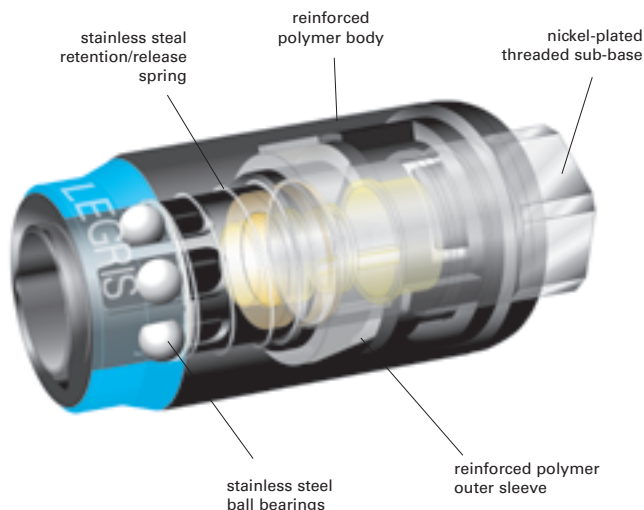

# quick acting couplers

## C9000 Advanced quick acting safety couplers

male body,  
BSPT thread

**9405U** ØD  
R1/4 9405U06 13  
R3/8 9405U06 17




female body,  
BSPP thread

**9414U** ØD  
G1/4 9414U06 13  
G3/8 9414U06 17



body with hosetail

**9421U** ØD  
6 9421U06 06  
8 9421U06 08

ISO B6

Flow : 1 250 NI/min  
Passage : 5,5 mm

male thread,  
BSPP thread

**9087U** ØD  
G1/4 9087U06 13  
G3/8 9087U06 17



female thread,  
BSPP thread

**9086U** ØD  
G1/4 9086 23 13  
G3/8 9086 23 17



probe with hosetail

**9094U** ØD  
6 9094U06 06  
8 9094U06 08  
10 9094U06 10



Safety



## Nickel plated brass quick acting couplers

## Series 24

male body,  
BSPP thread

**9101** ØD  
G1/4 9101 24 13  
G3/8 9101 24 17



female body,  
BSPP thread

**9114** ØD  
G1/4 9114 24 13  
G3/8 9114 24 17



body with barbed fitting

**9123** ØD  
6 9123 24 06  
8 9123 24 08  
10 9123 24 10




Flow : 800 NI/min  
Passage : 5,5 mm

male thread,  
BSPP thread

**9087** ØD  
G1/4 9087U06 13  
G3/8 9087U06 17



female thread,  
BSPP thread

**9086** ØD  
G1/4 9086 23 13  
G3/8 9086 23 17



probe with hosetail

**9085** ØD  
6 9085 23 06  
8 9085 23 08  
10 9085 23 10



Single shut-off



## Blowguns

standard blowgun  
with angled nozzle

**0659** C    
G1/4 3,5 0659 00 13



lever operated nickel plated brass  
air gun with removable nozzle

**0623** C    
G1/4 2 0623 10 35



# Industrial ball valves and axial valves

These **Legris ball valves** are suited to a variety of customer requirements in terms of performance.

- **nickel-plated brass ball valves, fluoropolymer series**  
economical solution, with full flow fluid passage, they are adapted to many applications requiring PTFE seals.
- **stainless steel ball valves**  
designed for use with **corrosive fluids** and in **aggressive environments**, they are suited to high pressure and high temperature industrial applications.
- **nickel-plated brass lockable ball valves**  
designed for **safety of personnel and equipment**, they allow to prevent potentially dangerous consequences caused by unintended operations.

- The **axial valves** offer the functions of a valve fitted with an actuator. A pneumatic automation device is fitted directly into the valve. Its operation is not affected by the up/downstream pressures of the transported fluids, which guarantees the user total safety and a vastly simplified choice.

## nickel-plated brass ball valves

### fluoropolymer series

double female with standard handle,  
BSP parallel

**4905**



| C       | DN | PN |            |
|---------|----|----|------------|
| G1/4    | 10 | 25 | 4905 00 13 |
| G3/8    | 10 | 25 | 4905 00 17 |
| G1/2    | 15 | 25 | 4905 00 21 |
| G3/4    | 20 | 25 | 4905 00 27 |
| G1"     | 25 | 25 | 4905 00 34 |
| G1 1/4" | 32 | 16 | 4905 00 42 |
| G1 1/2" | 40 | 16 | 4905 00 49 |
| G2"     | 50 | 16 | 4905 00 48 |

Working temperature : -20° to +90°C

Maximum working pressure :

- G1/4 to G1" : 25 bar
- G1 1/4" to G2" : 16 bar

double female with butterfly handle,  
BSP parallel

**4906**



| C    | DN | PN |            |
|------|----|----|------------|
| G1/4 | 10 | 25 | 4906 00 13 |
| G3/8 | 10 | 25 | 4906 00 17 |
| G1/2 | 15 | 25 | 4906 00 21 |
| G3/4 | 20 | 25 | 4906 00 27 |
| G1"  | 25 | 25 | 4906 00 34 |

Working temperature : -20° to +90°C

Maximum working pressure :

- G1/4 to G1" : 25 bar

### lockable ball valves

double female with vent

**0439**



| C    | DN |            |
|------|----|------------|
| G1/4 | 7  | 0439 07 13 |
| G3/8 | 10 | 0439 10 17 |
| G1/2 | 13 | 0439 13 21 |

Working temperature : -20° to +80°C

Maximum working pressure : 40 bar

handle is non-removeable.

## light series ball valve

double female

**0492**



| C    | DN |                |
|------|----|----------------|
| G1/4 | 4  | 0492 04 13     |
| G1/4 | 4  | 0492 04 13 64* |
| G3/8 | 7  | 0492 07 17     |
| G1/2 | 10 | 0492 10 21     |
| G3/4 | 13 | 0492 13 27     |

\* Zamac short handle

male and female

**0491**



| C    | DN |                |
|------|----|----------------|
| G1/4 | 4  | 0491 04 13     |
| G1/4 | 4  | 0491 04 13 64* |
| G3/8 | 7  | 0491 07 17     |
| G1/2 | 10 | 0491 10 21     |
| G3/4 | 13 | 0491 13 27     |

\* Zamac short handle

## stainless steel ball valves

double female, economy version,  
BSP parallel

**4810**



| C    | DN |            |
|------|----|------------|
| G1/4 | 8  | 4810 08 13 |
| G3/8 | 10 | 4810 10 17 |
| G1/2 | 15 | 4810 15 21 |
| G3/4 | 20 | 4810 20 27 |
| G1"  | 25 | 4810 25 34 |

Threads conform to ISO 228-1.

## axial valves

normally closed, double female BSPP  
thread

**4202**



| C       | DN |               |
|---------|----|---------------|
| G3/8    | 10 | 4202 10 17 20 |
| G1/2    | 15 | 4202 15 21 20 |
| G3/4    | 20 | 4202 20 27 20 |
| G1"     | 25 | 4202 25 34 20 |
| G1 1/4" | 32 | 4202 32 42 20 |
| G1 1/2" | 40 | 4202 40 49 20 |
| G2"     | 50 | 4202 50 48 20 |

subbase for solenoid valve

**4298**



| C      |            |
|--------|------------|
| M5x0,8 | 4298 00 01 |

### Technical specifications

**Suitable fluids** : water, air, oils greases ...

**Working temperature** : - 20° to + 135°C

**Working pressure** : 10 bar

**Pilot fluid** : filtered compressed air

**Pilot pressure** :

- NC and NO : 4,2 to 8 bar

- Double acting : 3 to 8 bar

Leader in industrial connectics, Legris develops an offer of technical components for fluid circuits and innovative services for its customers.



**Legris Connectic** : a full range of high and low pressure fittings, couplers, tubes, valves and accessories.



**Legris Transair** : the Transair range of quick connections for compressed air systems and cooling circuits.

For more information, connect up to Legris web-site.

**[www.legris.com](http://www.legris.com)**