
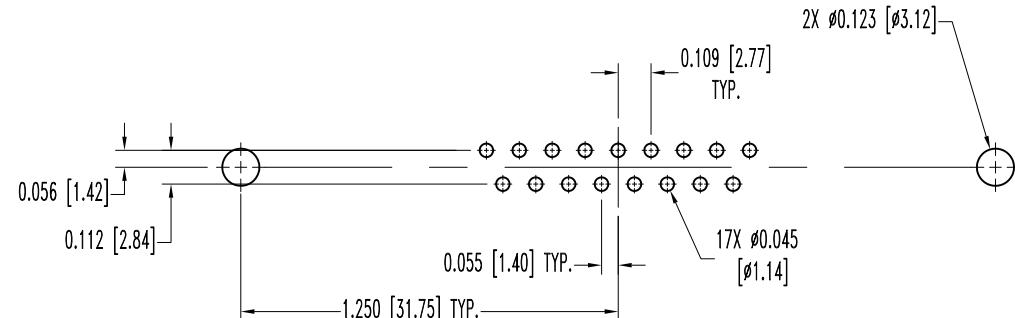
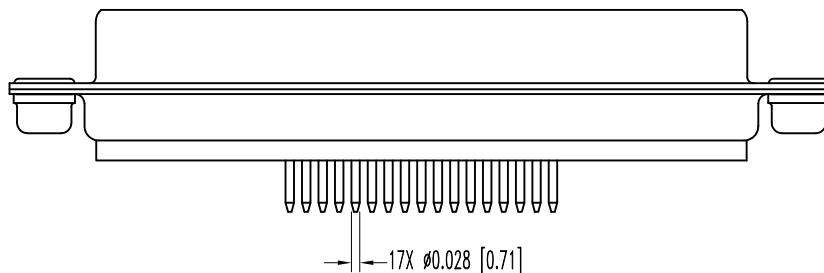
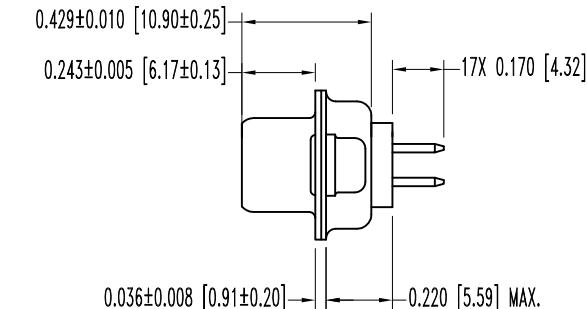


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER ASSUMES ALL RISK AND LIABILITY FOR DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
5-21 06	NC	ECO 31054	RCW	BS	COLE
3-19 10	A	ECO 32267	COLE	BE	COLE
12-9 10	B	ECO 33391	COLE	BE	COLE

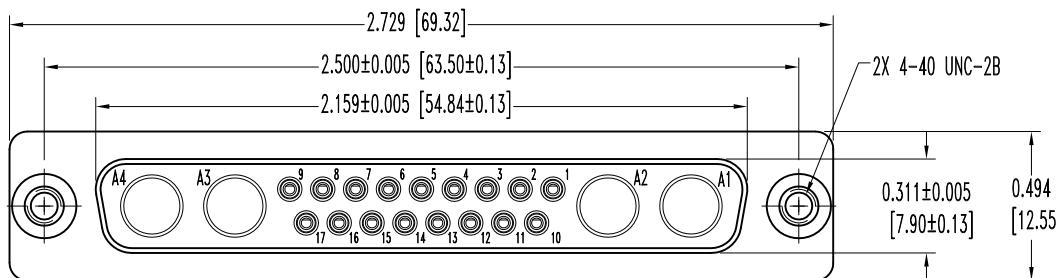

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE.

CONTACTS: PRECISION MACHINED COPPER ALLOY WITH 0.000050 [1.27 μ] GOLD OVER NICKEL FINISH.

SHells: STEEL, ZINC PLATE WITH CHROMATE SEAL.

CLINCH NUTS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.

VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDSDENSITYCOMBO-D OR CONNECTPOSITRONIC.COM.

3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



**POSITRONIC
INDUSTRIES INC.**
www.connectpositronic.com

FSCM 28198

	CBM SERIES	SCALE N.T.S.	DRAWN BY B SHELLEDY
DECIMAL TOL. ± 0.015 [0.38]			APPROVED BY R WILLIAMS
TITLE			CBM21WA4S3S5000/AA
ANGULAR TOL. ± 5°	DATE 5-21-09	DRAWING NUMBER SK10739	REV. B