Dec.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

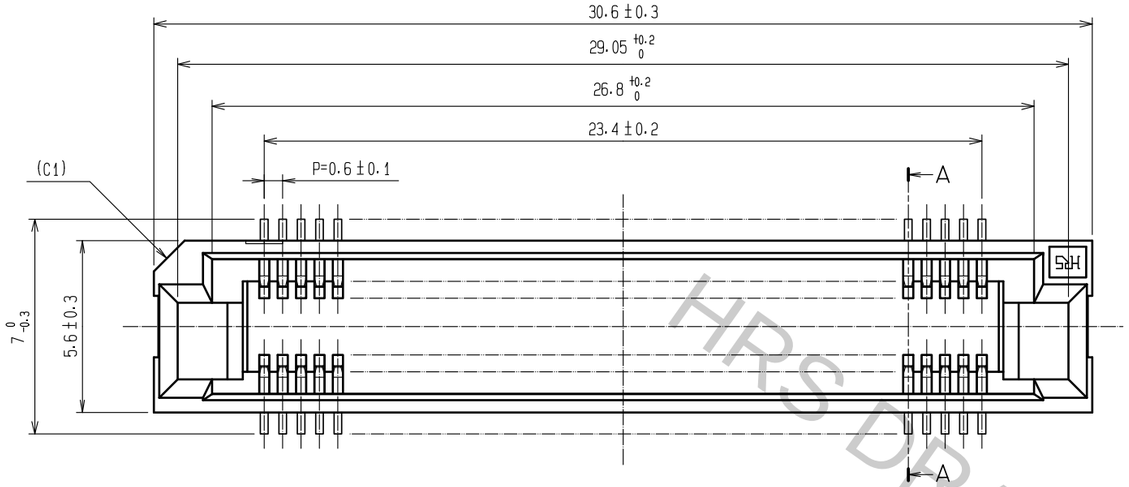

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE) (2:1)

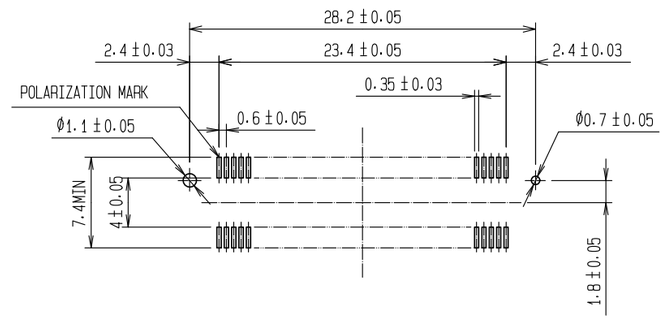

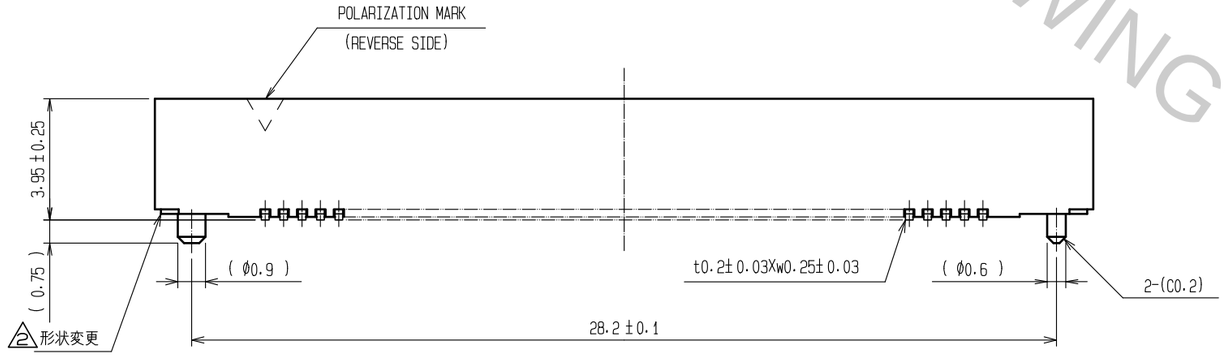



A−A



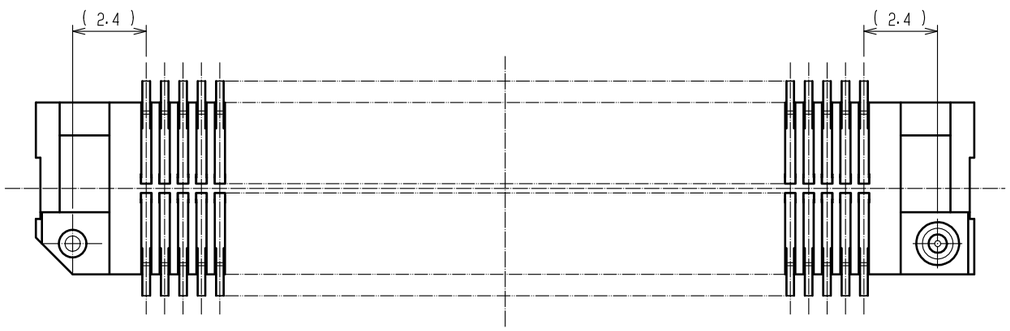

NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. TUBE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min. LEAD AREA:GOLD FLASH UNDER PLATING:NICKEL 1.5μm min.			
1	POLYPHENYLENE SULFIDE	LIGHT BROWN (UL94V-0)	4	ELASTOMERS	STOPPER
			3	POLYVINYL CHLORIDE	TUBE

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	0					

HIROSE ELECTRIC CO., LTD.

APPROVED	NH. NAKATA	18.02.28
CHECKED	HT. YAMAGUCHI	18.02.28
DESIGNED	TY. EDAGAWA	18.02.28
DRAWN	MK. INOUE	18.02.23

DRAWING NO.	EDC-150882-68-00
PART NO.	FX8C-80S-SV(68)
CODE NO.	CL578-0803-8-68

0 1/2

HRS DRAWING FOR REFERENCE

Dec.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

DRAWING FOR PACKING(FREE)

HRS DRAWING FOR REFERENCE

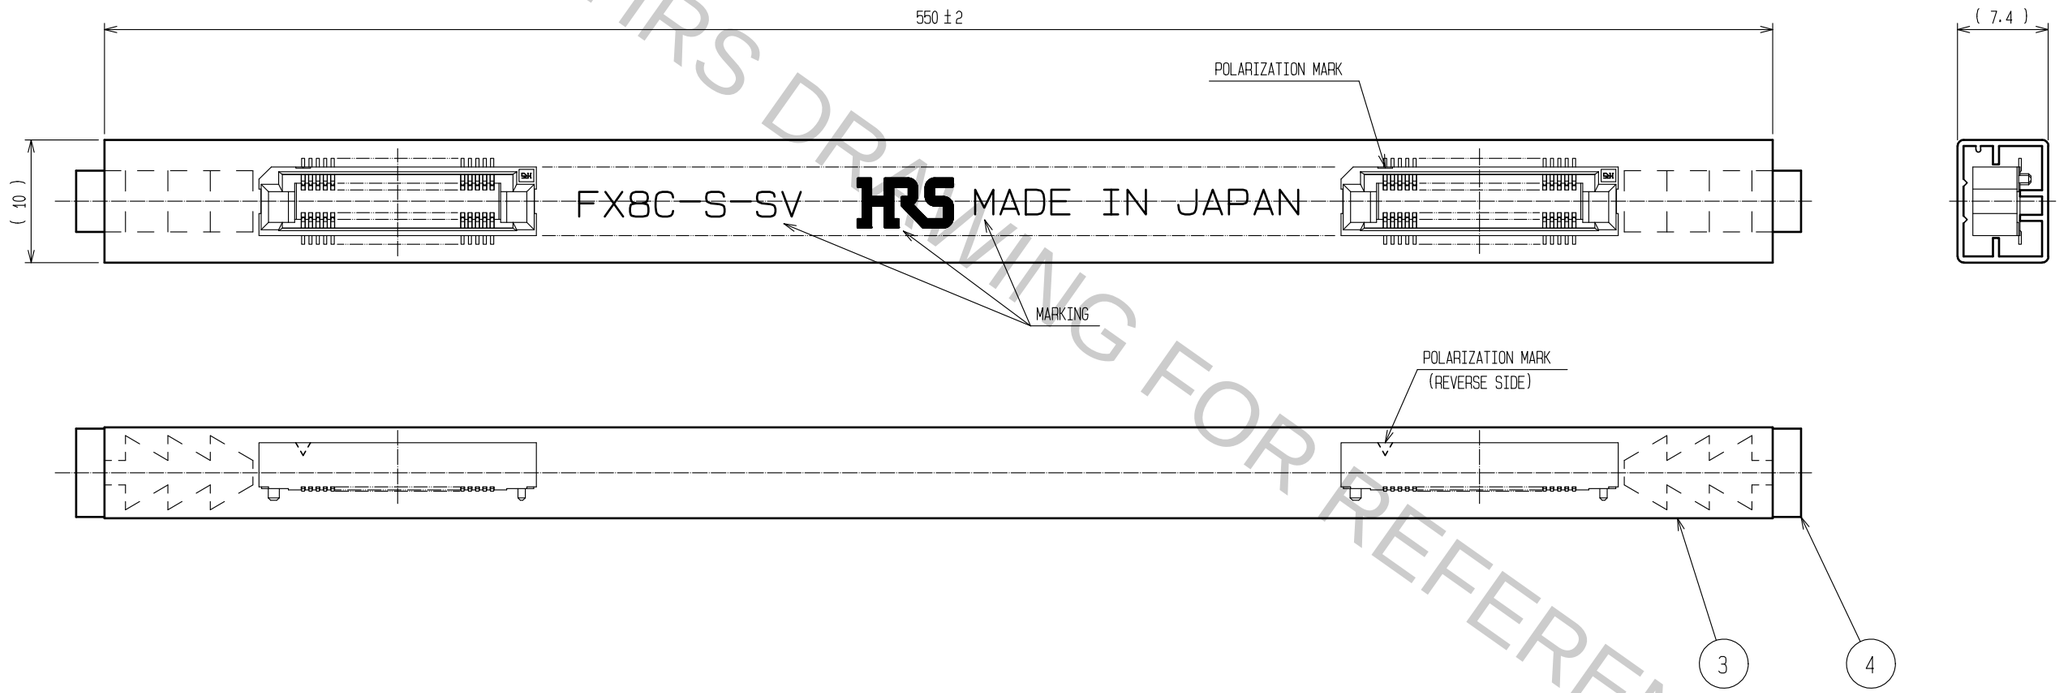

NOTE 1. 1 TUBE : 17 CONNECTORS.
2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS	DRAWING NO.	EDC-150882-68-00
	PART NO.	FX8C-80S-SV(68)
	CODE NO.	CL578-0803-8-68

△0 2/2