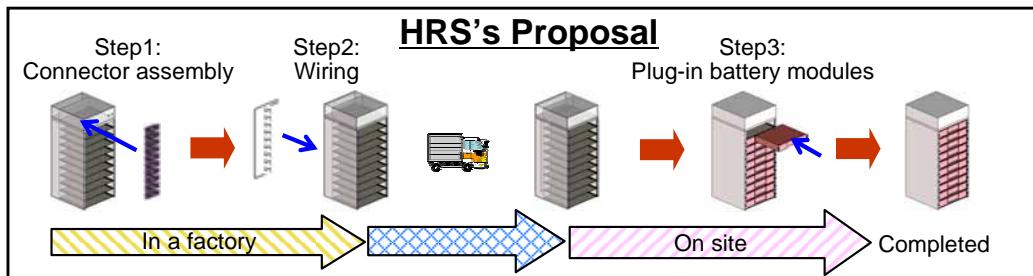
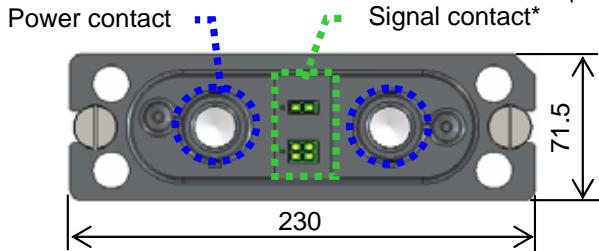
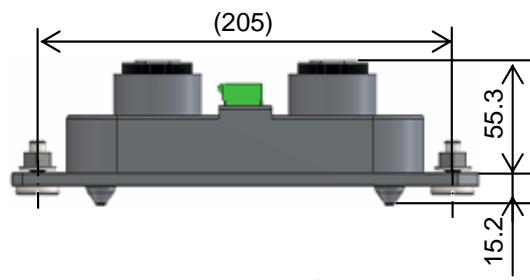
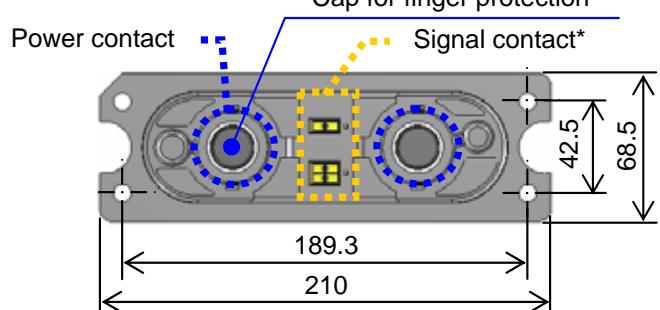
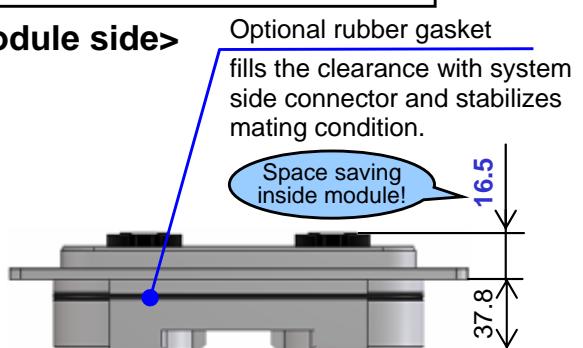


**Plug-In Connector for Storage Battery
Capable up to 300 Amps****◆ Features**

1. Hybrid design with 300 Amps power contacts & signal contacts
2. Reliable crimp method for wire termination of signal contact
3. Floating screw allows ± 2.5 mm floating mate
4. Multiple contact springs on power contact decrease heat generation in connector by current carrying
5. Sequential signal contacts detect incomplete mating for safety
6. Finger protection cap is provided
7. Preparing for UL application
8. RoHS compliant

**<System Rack side>****<Module side>**

*Signal contact variation: 2 + 4 pos. and 2 + 12 pos. (Under planning)

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.

NOTE: All the dimensions in millimeters.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[PS2-1618PCFA](#) [PS2-2WP/6C/6C](#) [AP105-PS2-1618](#) [PS2-6SC](#) [PS2-6PC](#) [PS2-1618SCFA](#) [PS2-2WS/6C/6C](#)