
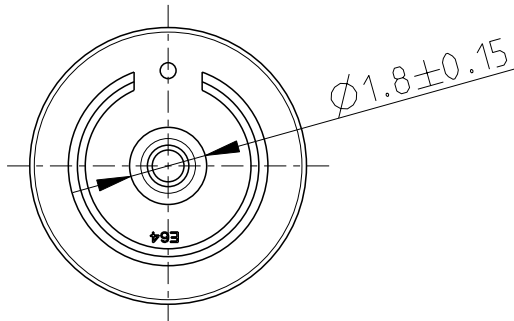
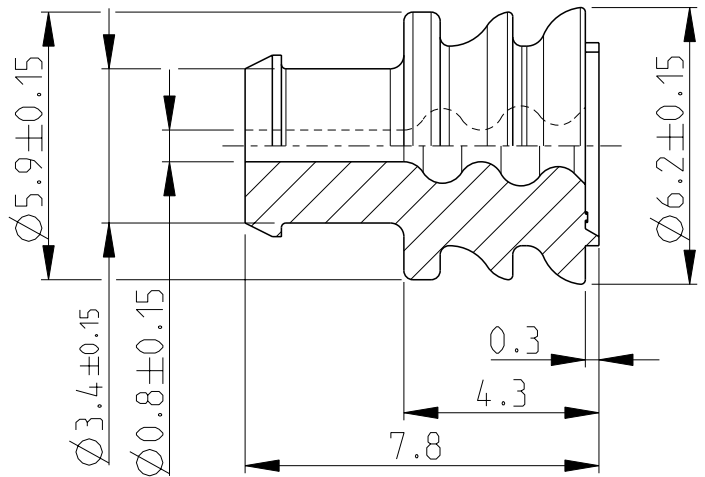



LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M8	REVISED PER ECO-11-005150	31MAR2011	RK	HMR
			M9	REVISED PER ECO-16-012850	31AUG2016	M.G.	M.G.

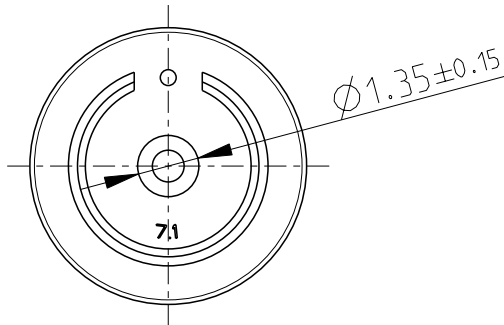

ALTERNATIVE DESIGN ADMITTED:

BEMERKUNGEN
NOTES

- Einzelheiten der Ausfuehrung bleiben dem hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- Passend fuer Drahtgroessenbereich: 0.35-1.0mm²
SUITABLE FOR WIRE SIZE RANGE:
- Passend fuer Isolationsdurchmesser: 1.2-2.1mm
SUITABLE FOR INSULATION DIAMETER:
- Bestueckungshilfe fuer Einzelleiterabdichtung siehe: TE Connectivity: 3-1579007-2
INSERTER FOR SINGLE WIRE SEAL SEE:
- Keine Luftloecher zulaessig
NO AIR BUBBLES PERMITTED



1:1

828920-2	M	DARK BLUE	VMQ-50Shore A SILICON OIL FREE
828920-1	M	GREY	VMQ-50Shore A SELF-LUBRICATED
PART NO.	REV.	COLOUR	MATERIAL

DIMENSIONS:

mm

DWN 17APR1997

Gaupp, P.

CHK 21APR1997

Kuempel, D.

APVD -

PRODUCT SPEC

108-18263-1

APPLICATION SPEC

-

WEIGHT 0.106g

MATERIAL

SEE TABLE

FINISH

-



TE Connectivity

NAME

SINGLE WIRE SEAL FOR
2.5mm CTC. SYSTEM

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A 4

00779

C-828920

-

CUSTOMER DRAWING

SCALE 6:1

SHEET 1 OF 1

REV M9

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT -

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
DIN 16901-160

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±°

