

CATALOG NUMBER	FIG. NO.	CONDUCTOR RANGE ALUMINUM OR COPPER	BOLT HOLE SIZE	DIMENSIONS								RECOMMENDED TIGHTENING TORQUE, IN. LBS N.M.	6
				C MAX.	D	E	H MAX.	K DIA	L	N	T		
K11A30U	1	TWO: 6 STR. - 300 kcmil	5/16"	1.02 [26]	.94 [24]	----	2.02 [51]	.33 [8]	3.00 [76]	.47 [12]	.31 [8]	275 (31)	
K11A34U-2	2	TWO: 4/0 STR. - 500 kcmil	1/4"	1.45 [37]	2.31 [59]	.69 [18]	2.40 [61]	.28 [7]	2.91 [74]	.25 [6]	.75 [19]	375 (42)	
K11A36U-2	3	TWO: 2 STR. - 600 kcmil	3/8"	1.52 [39]	2.31 [59]	1.38 [35]	3.02 [77]	.40 [10]	4.91 [125]	.38 [10]	.75 [19]	375 (42)	
K11A39U-2	3	TWO: 1/0 STR. - 750 kcmil	3/8"	1.70 [43]	2.31 [59]	1.38 [35]	3.01 [76]	.40 [10]	4.91 [125]	.38 [10]	.75 [19]	375 (42)	
K21A36U-2	4	THREE: 2 STR. - 600 kcmil	3/8"	2.51 [64]	2.31 [59]	1.38 [35]	3.01 [76]	.40 [10]	4.91 [125]	.38 [10]	.75 [19]	375 (42)	
K22A36U-2	5	FOUR: 2 STR. - 600 kcmil	3/8"	2.48 [63]	2.31 [59]	1.38 [35]	3.01 [76]	.40 [10]	4.91 [125]	.38 [10]	.75 [19]	375 (42)	
K22A39U-2	5	FOUR: 1/0 STR. - 750 kcmil	3/8"	2.86 [73]	2.31 [59]	1.38 [35]	3.02 [77]	.40 [10]	4.91 [125]	.38 [10]	.75 [19]	375 (42)	

REV.	DATE	DESCRIPTION	BY	C'D.
0	4/11/97	DRAWING RELEASED	PL	JLM





FIG. 1





FIG. 2


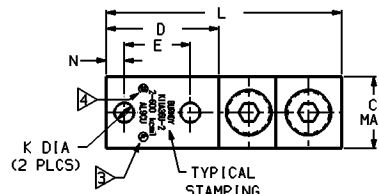


FIG. 3


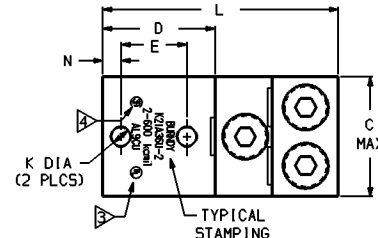


FIG. 4


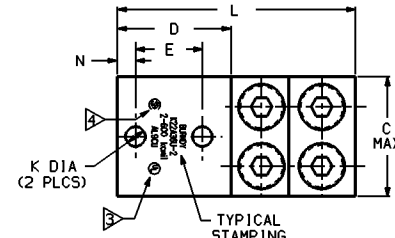


FIG. 5

NOTES:

- MATERIAL-BODY: ALUMINUM
SCREW: ALUMINUM
- FINISH-BODY: TIN PLATED
SCREW: TIN PLATED
- CONNECTORS ARE UL LISTED TO UL486B FOR
INDICATED CONDUCTOR RANGE.
- CONNECTORS ARE CSA CERTIFIED TO C22.2, NO. 65
FOR INDICATED CONDUCTOR RANGE.
- "N" INDICATES NEMA STANDARD STUD HOLES.
- LISTED TORQUE VALUES ARE FOR MAXIMUM CONDUCTOR SIZES ACCOMMODATED.
CONSULT UL486 TABLES 7-4, 7-5, & 7-6 FOR SMALLER CONDUCTOR SIZES.
- THE K11A30U UNIVERSAL TERMINAL IS NOT CSA LISTED.
- DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE
NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.

UNIVERSAL TERMINAL			
CAT NO: K11A-U, K21A-U, K22A-U (SEE TABLE)	SCALE	N/A	
DRAWN: P. LAPONTUS	4/10/97	CHECKED: J. MICHAUD	4/21/97
DSGN APPVL: K. HELLO	4/30/97	MFG APPVL:	
S.A. APPVL: D. VARIO	5/1/97	MKG APPVL: P. WERTHMAN	5/1/97
CAD FILE: SE210997-SHT05	PM REF: N/A		
FRANKTONE CONNECTORS USA INC. BURNBY ELECTRICAL MANCHESTER, NH 03108 U. S. A. 1-800-346-4176		PROJECT: D.O. 53794 DRAWING NO. SE210997 SHEET 5 OF 5	