



3 Amp Schottky Rectifier 5820SM — 5822SM

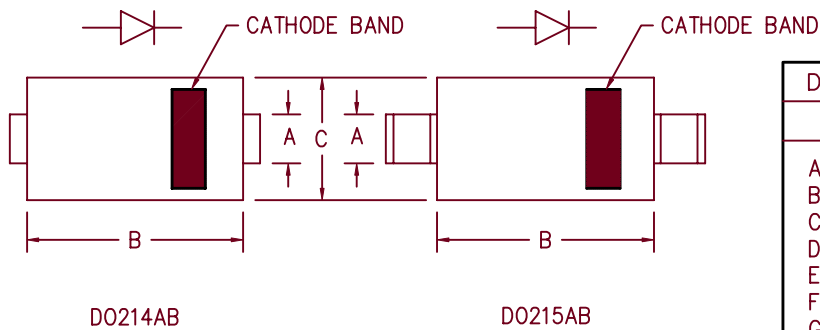

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.117	.123	2.97	3.12	
B	.260	.280	6.60	7.11	
C	.220	.245	5.59	6.22	
D	.307	.322	7.80	8.18	
E	.075	.095	1.91	2.41	
F	.380	.400	9.65	10.16	
G	.025	.040	.640	1.02	
H	.030	.060	.760	1.52	

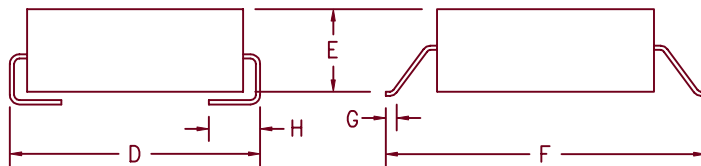

Microsemi
Catalog Number

Industry
Part No.

Working
Peak Reverse
Voltage

Repetitive
Peak Reverse
Voltage

5820SM*

MBRS320T3
SK32

20V

20V

5821SM*

MBRS330T3
SK33

30V

30V

5822SM*

MBRS340T3
SK34

40V

40V

*Add Suffix J For J Lead or G For Gull Wing Lead Configuration

- Schottky Barrier Rectifier
- Guard Ring Protection
- Low Forward Voltage
- High Reliability
- High Current Capability
- Surface mount package

Electrical Characteristics

		5820SM	5821SM	5822SM	
Average forward current	$I_F(AV)$	3A	3A	3A	Square wave, $T_L = 127^\circ\text{C}$, $R_{\theta JL} = 20^\circ\text{C/W}$ 8.3ms, half sine, $T_J = 150^\circ\text{C}$ $I_{FM} = 1A$, $T_J = 25^\circ\text{C}^*$ $I_{FM} = 3A$, $T_J = 25^\circ\text{C}^*$ $I_{FM} = 9.4A$, $T_J = 25^\circ\text{C}^*$ V_{RRM} , $T_J = 25^\circ\text{C}$ $V_R = 5.0V$, $T_J = 25^\circ\text{C}$
Maximum surge current	I_{FSM}	150A	150A	150A	
Max peak forward voltage	V_{FM}	.36V	.37V	.38V	
Max peak forward voltage	V_{FM}	.46V	.48V	.50V	
Max peak forward voltage	V_{FM}	.65V	.67V	.70V	
Max peak reverse current	I_{RM}	1.5mA	1.5mA	1.5mA	
Typical junction capacitance	C_J	265pF	265pF	265pF	

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range	T_{STG}	-55°C to 150°C
Operating junction temp range	T_J	-55°C to 150°C
Maximum thermal resistance	$R_{\theta JL}$	20°C/W Junction to Lead
Weight		.008 ounces (.22 grams) typical

5820SM–5822SM

Figure 1
Typical Forward Characteristics

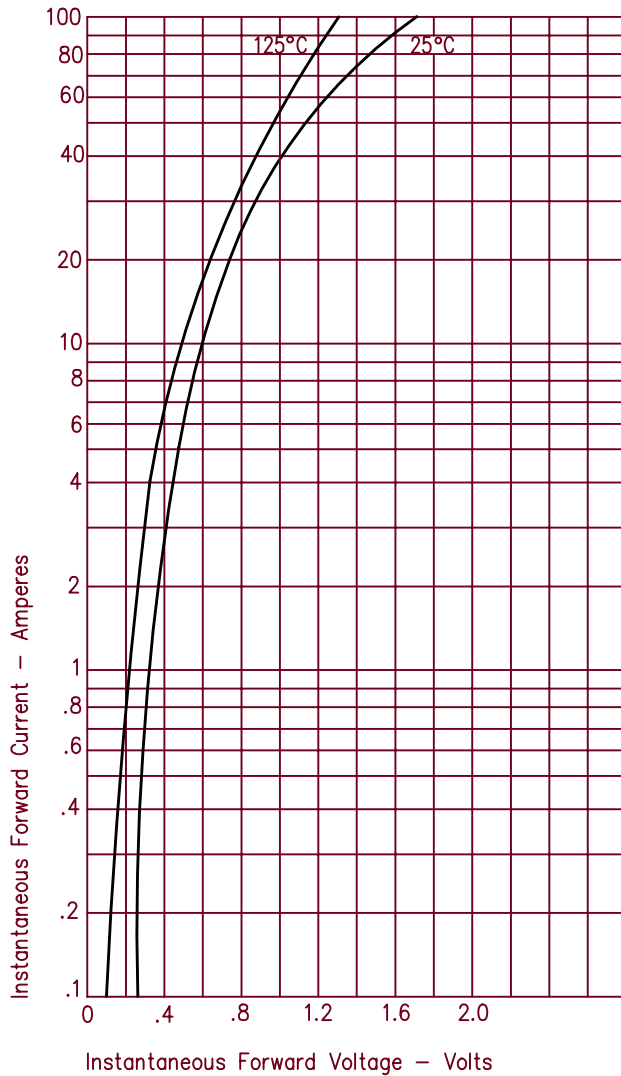


Figure 3
Typical Junction Capacitance

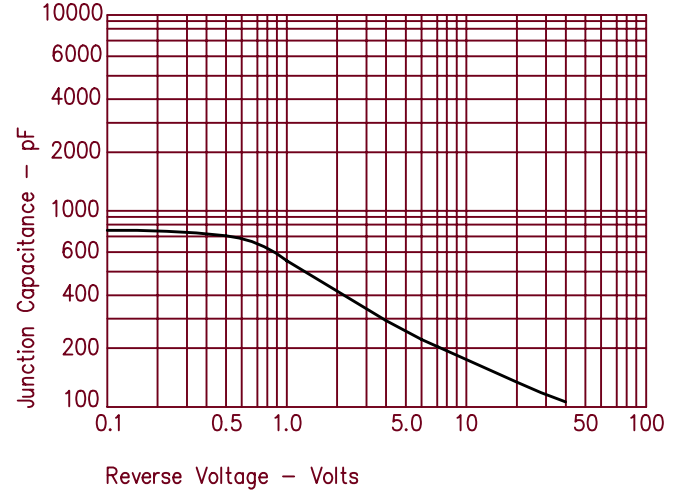


Figure 2
Typical Reverse Characteristics

